




# OIL ANALYSIS REPORT

Sample Rating Trend

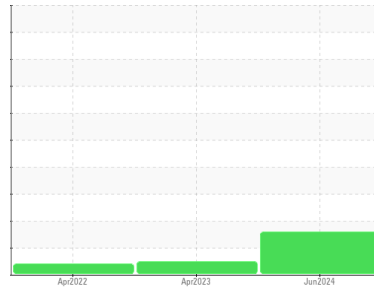

ISO



Machine Id

**KAESER 8341485**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>KC128828</b>    | KC109624    | KC97127     |
| Sample Date        | Client Info |             |            | <b>03 Jun 2024</b> | 04 Apr 2023 | 26 Apr 2022 |
| Machine Age        | hrs         | Client Info |            | <b>3280</b>        | 1748        | 556         |
| Oil Age            | hrs         | Client Info |            | <b>1531</b>        | 1192        | 566         |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Changed     | Changed     |
| Sample Status      |             |             |            | <b>ABNORMAL</b>    | NORMAL      | ATTENTION   |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >50        | <b>0</b>     | 0        | 1        |
| Chromium    | ppm | ASTM D5185m | >10        | <b>0</b>     | 0        | 0        |
| Nickel      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185m | >3         | <b>&lt;1</b> | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>0</b>     | <1       | 1        |
| Lead        | ppm | ASTM D5185m | >10        | <b>0</b>     | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >50        | <b>4</b>     | 5        | 1        |
| Tin         | ppm | ASTM D5185m | >10        | <b>0</b>     | 0        | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |






| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Barium     | ppm | ASTM D5185m | 90         | <b>0</b>     | 0        | 4        |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 90         | <b>7</b>     | 10       | 54       |
| Calcium    | ppm | ASTM D5185m | 2          | <b>0</b>     | 0        | 0        |
| Phosphorus | ppm | ASTM D5185m |            | <b>0</b>     | <1       | 0        |
| Zinc       | ppm | ASTM D5185m |            | <b>2</b>     | 0        | <1       |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>3</b>     | 0        | <1       |
| Sodium       | ppm | ASTM D5185m |            | <b>7</b>     | 5        | 4        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>2</b>     | 0        | 6        |
| Water        | %   | ASTM D6304  | >0.05      | <b>0.012</b> | 0.008    | 0.046    |
| ppm Water    | ppm | ASTM D6304  | >500       | <b>123</b>   | 86.6     | 463.2    |

| FLUID CLEANLINESS |  | method       | limit/base | current           | history1 | history2 |
|-------------------|--|--------------|------------|-------------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>7417</b>       | 2516     | 3630     |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>▲ 2744</b>     | 1223     | ● 1599   |
| Particles >14µm   |  | ASTM D7647   | >80        | <b>▲ 202</b>      | 57       | 45       |
| Particles >21µm   |  | ASTM D7647   | >20        | <b>▲ 44</b>       | 6        | 7        |
| Particles >38µm   |  | ASTM D7647   | >4         | <b>3</b>          | 1        | 0        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>          | 0        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/13  | <b>▲ 20/19/15</b> | 19/17/13 | ● 18/13  |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 0.4        | <b>0.19</b> | 0.21     | 0.33     |


# OIL ANALYSIS REPORT

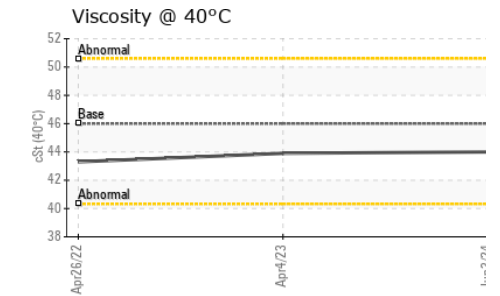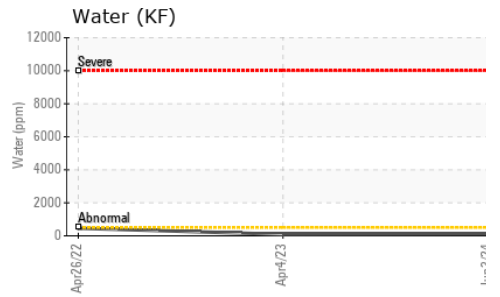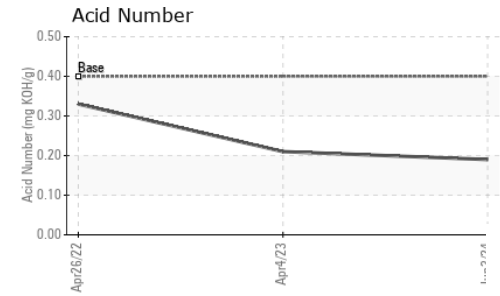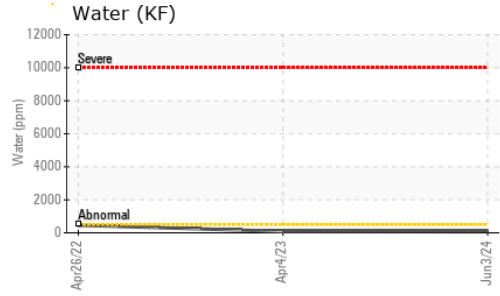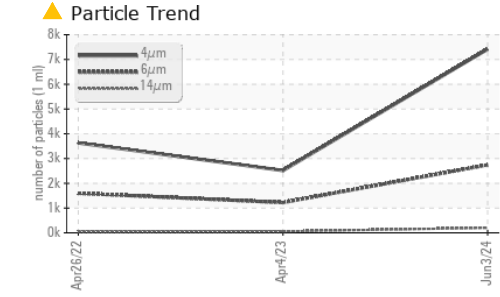





| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 46 | 44.0    | 43.9     | 43.3     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

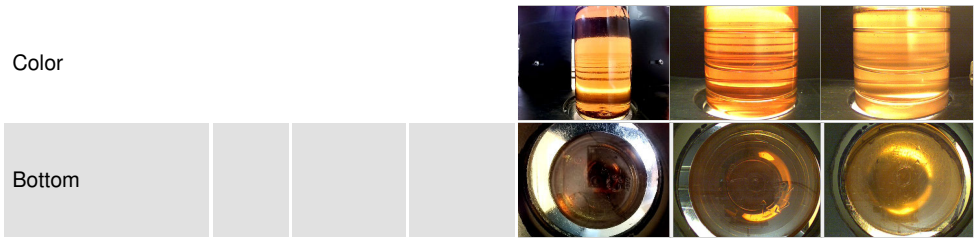

## GRAPHS

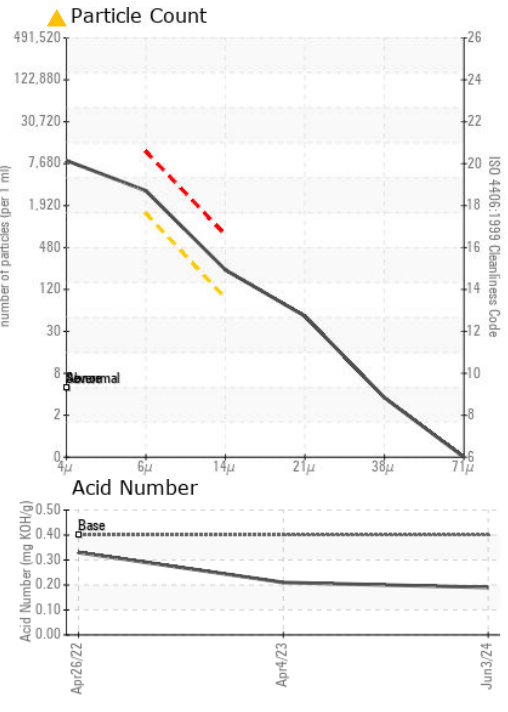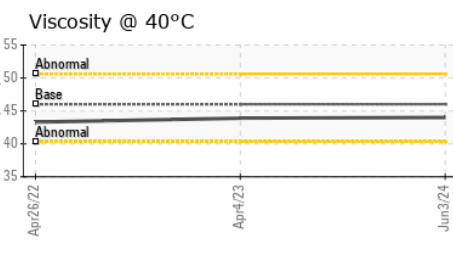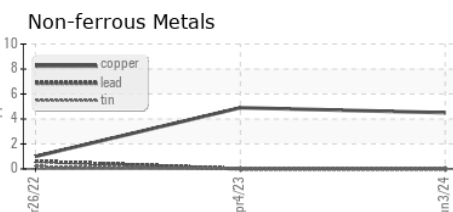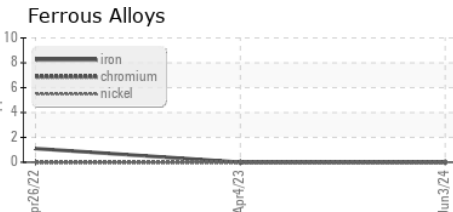

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC128828  
**Lab Number** : 06200756  
**Unique Number** : 11062879  
**Test Package** : IND 2  
**Received** : 05 Jun 2024  
**Tested** : 06 Jun 2024  
**Diagnosed** : 07 Jun 2024 - Don Baldrige

**SNIDER TIRE**  
 540 LOCUST GROVE  
 SPARTANBURG, SC  
 US  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)