

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Area

# [2867] KAESER 8754651

#### Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sample Number Sample Date Machine Age Oil Age Oil Changed Sample Status	hrs hrs	Client Info Client Info Client Info		KC128814 15 Apr 2024		
Machine Age Oil Age Oil Changed Sample Status				15 Apr 2024		
Oil Age Oil Changed Sample Status		Client Info		15 API 2024		
Oil Changed Sample Status	hrs			3399		
Sample Status		Client Info		3399		
-		Client Info		Changed		
				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m		4		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	17		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	52		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m	-	0		
Zinc	ppm	ASTM D5185m		6		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		20		
Potassium	ppm	ASTM D5185m	>20	18		
Water	%	ASTM D6304	>0.05	0.023		
ppm Water	ppm	ASTM D6304	>500	231		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		23623		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 22/20/15		
	TION	method	limit/base	current	history1	history2
FLUID DEGRADA						



Particle Trend

25

Ê 20

) sapitud jo 10k

5

0

12000

1000

800 (maa)

600 Water 400

200

0.50

(B/HOX Ê0.3

E 0.20

Pio 0.1

0.00

1000

600 Water (

4000

200

52

50

48

()-41 ()-41 ()-44)()-44 ()-44) B

42

40

38

Abnom

5

Water (KF)

Abnormal n Anr15/0

Viscosity @ 40°C


nrl


Water (KF)

Acid Number

Built for a lifetime

14µm



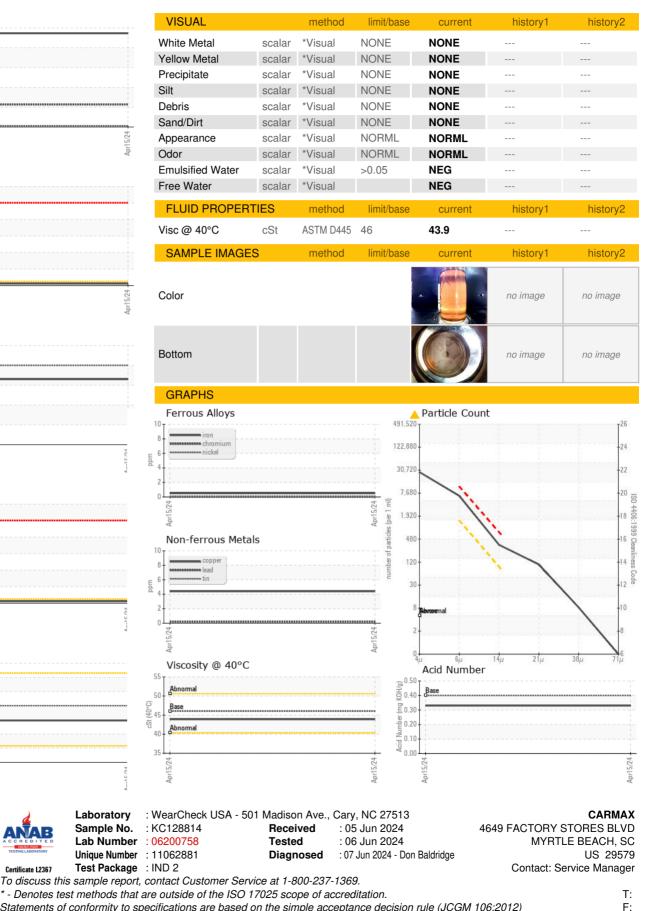

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - CARMYRKC