




OIL ANALYSIS REPORT

Sample Rating Trend

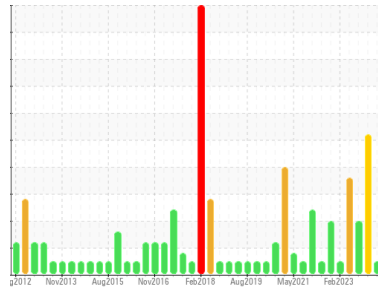

NORMAL



Machine Id
1231 LOCO

Component
Diesel Engine

Fluid
 DIESEL ENGINE OIL SAE 15W40 (100 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			ST43269	ST46156	ST41971
Sample Date	Client Info			29 May 2024	28 Feb 2024	20 Dec 2023
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	SEVERE	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	13	11	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	2	1
Lead	ppm	ASTM D5185m	>40	1	3	0
Copper	ppm	ASTM D5185m	>330	2	2	2
Tin	ppm	ASTM D5185m	>15	<1	7	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	50	49	44
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	46	43	43
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	450	8	13	31
Calcium	ppm	ASTM D5185m	3000	3251	3768	3120
Phosphorus	ppm	ASTM D5185m	1150	22	13	25
Zinc	ppm	ASTM D5185m	1350	7	3	27
Sulfur	ppm	ASTM D5185m	4250	2771	2935	2258

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	4	3
Sodium	ppm	ASTM D5185m	>158	9	18	4
Potassium	ppm	ASTM D5185m	>20	7	7	0


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.6	21.9	7.2
Sulfation	Abs/1mm	*ASTM D7415	>30	12.5	0.0	13.0

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

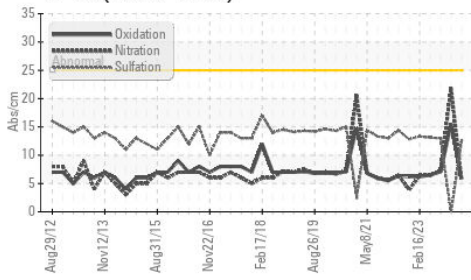


Particle Trend

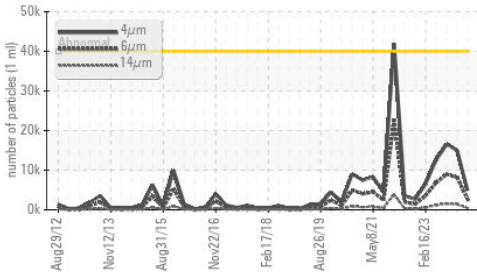


Base Number

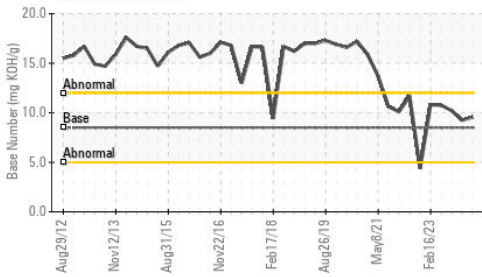

Viscosity @ 100°C

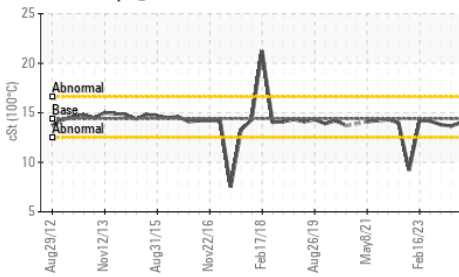

Particle Trend

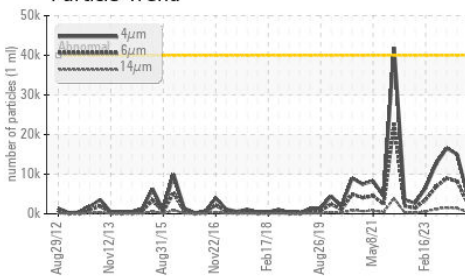

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>40000	4915	15033	16521
Particles >6µm	ASTM D7647	>5000	2678	▲ 8189	▲ 9000
Particles >14µm	ASTM D7647	>640	456	▲ 1394	▲ 1532
Particles >21µm	ASTM D7647	>160	154	▲ 469	▲ 516
Particles >38µm	ASTM D7647	>40	24	▲ 72	▲ 80
Particles >71µm	ASTM D7647	>10	2	7	8
Oil Cleanliness	ISO 4406 (c)	>22/19/16	19/19/16	▲ 21/20/18	▲ 21/20/18


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	5.8	15.5	7.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.54	9.26	10.22

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	SOLID	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	▲ 0.2%	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	13.66	13.8

GRAPHS


Ferrous Alloys

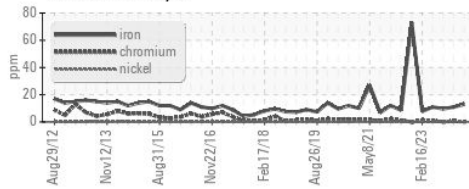


Non-ferrous Metals

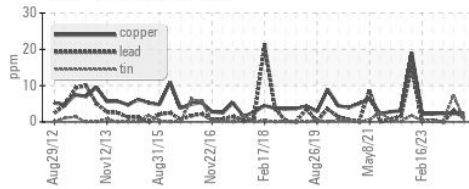


Viscosity @ 100°C

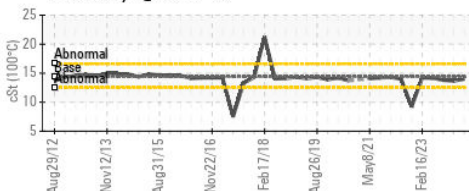

Particle Count

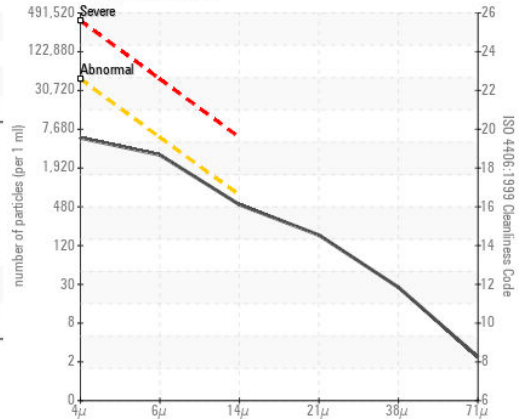

Base Number

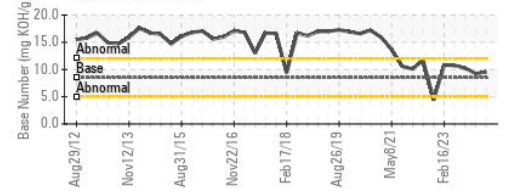

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ST43269

Lab Number : **06200833**

Unique Number : 11062956

Test Package : IND 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 05 Jun 2024

Tested : 07 Jun 2024

Diagnosed : 07 Jun 2024 - Don Baldrige

NUCOR STEEL-HERTFORD

PO BOX 279

WINTON, NC

US 27986

Contact: JOHN REUTER

jrreuter@hpsystemsinc.com

T:

F: (252)356-1369