


OIL ANALYSIS REPORT

Sample Rating Trend

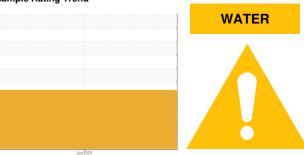

Machine Id

JOHN DEERE 1025R 1LV1025RVHH136002

Hydraulic System

JOHN DEERE HY-GARD HYD/TRANS LOW VIS

DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Wear

The iron level is abnormal.

Contamination

There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.


VIS (QTS)				Jun 2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		JR0029031		
Sample Date		Client Info		05 Jun 2024		
Machine Age	hrs	Client Info		474		
Oil Age	hrs	Client Info		74		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		23		
Iron	ppm	ASTM D5185m	>20	<u>^</u> 81		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m		4		
Copper	ppm	ASTM D5185m	>75	38		
Tin	ppm	ASTM D5185m		1		
Vanadium		ASTM D5185m	>10	0		
Cadmium	ppm	ASTM D5185m		<1		
Caumum	ррпі	MOTIVI DOTODITI		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		1		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		2		
Magnesium	ppm	ASTM D5185m		91		
Calcium	ppm	ASTM D5185m		3310		
Phosphorus	ppm	ASTM D5185m		945		
Zinc	ppm	ASTM D5185m		1200		
Sulfur	ppm	ASTM D5185m		3580		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	13		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.1	△ 0.252		
ppm Water	ppm	ASTM D6304	>1000	2520		
FLUID CLEANLII	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	104060		
Particles >6µm		ASTM D7647	>1300	<u>^</u> 25093		
Particles >14µm		ASTM D7647	>160	<u> </u>		
Particles >21µm		ASTM D7647	>40	<u>^</u> 371		
Particles >38µm		ASTM D7647	>10	<u>^</u> 25		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>4</u> 24/22/18		
FLUID DEGRADATION		method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045



OIL ANALYSIS REPORT

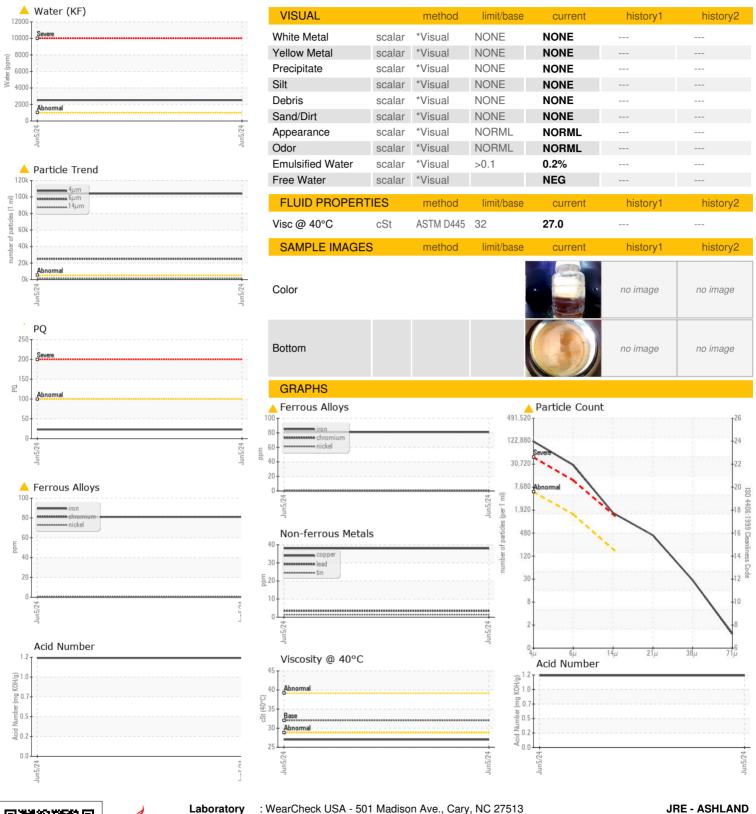



Certificate 12367

Report Id: JAMASH [WUSCAR] 06201405 (Generated: 06/17/2024 11:37:00) Rev: 2

Laboratory Sample No.

Lab Number

: JR0029031 : 06201405 Unique Number : 11063528

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : MOBCE (Additional Tests: KF, PQ)

Received : 06 Jun 2024 **Tested** Diagnosed

: 11 Jun 2024 : 11 Jun 2024 - Jonathan Hester

Contact: DAVID ZIEG dzieg@jamesriverequipment.com

11047 LEADBETTER RD

ASHLAND, VA

US 23005

T: (804)798-6001 F: (804)798-0292

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DAVID ZIEG - JAMASH