



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
JOHN DEERE 843L 1DW843LBKKF700324
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- QTS)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WE0007811	---	---
Sample Date	Client Info	29 May 2024	---	---
Machine Age	hrs Client Info	7361	---	---
Oil Age	hrs Client Info	500	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	24	---	---
Iron	ppm ASTM D5185m >20	15	---	---
Chromium	ppm ASTM D5185m >10	1	---	---
Nickel	ppm ASTM D5185m >10	0	---	---
Titanium	ppm ASTM D5185m	<1	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m >10	2	---	---
Lead	ppm ASTM D5185m >10	<1	---	---
Copper	ppm ASTM D5185m >75	5	---	---
Tin	ppm ASTM D5185m >10	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	29	---	---
Barium	ppm ASTM D5185m	<1	---	---
Molybdenum	ppm ASTM D5185m	10	---	---
Manganese	ppm ASTM D5185m	0	---	---
Magnesium	ppm ASTM D5185m	36	---	---
Calcium	ppm ASTM D5185m 87	282	---	---
Phosphorus	ppm ASTM D5185m 727	274	---	---
Zinc	ppm ASTM D5185m 900	338	---	---
Sulfur	ppm ASTM D5185m 1500	1661	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	5	---	---
Sodium	ppm ASTM D5185m	1	---	---
Potassium	ppm ASTM D5185m >20	3	---	---


FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 51946	---	---
Particles >6µm	ASTM D7647 >1300	▲ 4996	---	---
Particles >14µm	ASTM D7647 >160	▲ 191	---	---
Particles >21µm	ASTM D7647 >40	38	---	---
Particles >38µm	ASTM D7647 >10	1	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 23/19/15	---	---




OIL ANALYSIS REPORT


▲ Particle Trend

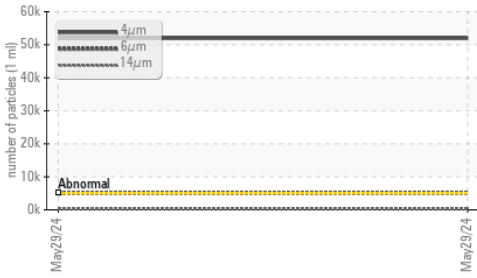


PQ

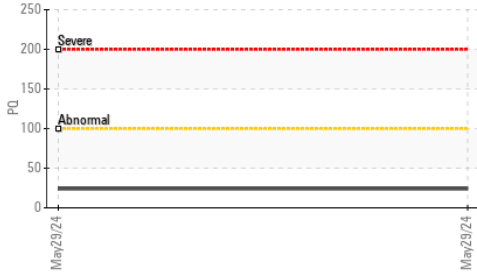


Acid Number

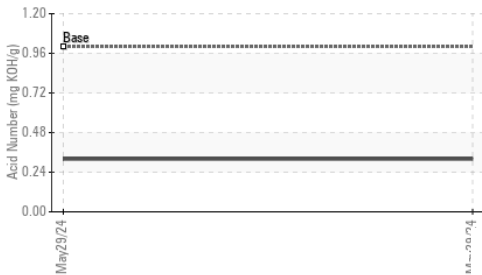

Viscosity @ 40°C

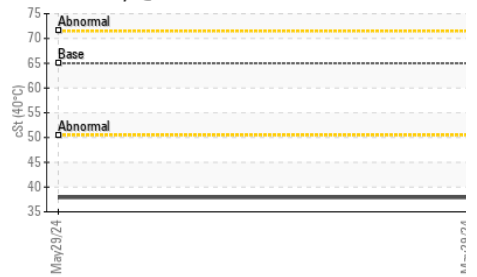

PQ

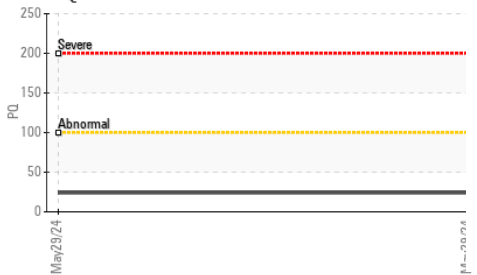

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 1.0	0.32	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	---	---
Yellow Metal	scalar *Visual	NONE	---	---
Precipitate	scalar *Visual	NONE	---	---
Silt	scalar *Visual	NONE	---	---
Debris	scalar *Visual	NONE	---	---
Sand/Dirt	scalar *Visual	NONE	---	---
Appearance	scalar *Visual	NORML	---	---
Odor	scalar *Visual	NORML	---	---
Emulsified Water	scalar *Visual	>0.1	---	---
Free Water	scalar *Visual	NEG	---	---

FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C cSt	ASTM D445 65	37.9	---	---

SAMPLE IMAGES


method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS


Ferrous Alloys




Non-ferrous Metals

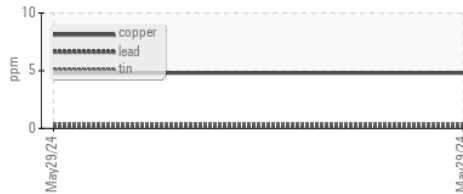

Viscosity @ 40°C

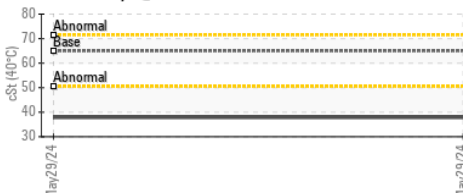

▲ Particle Count

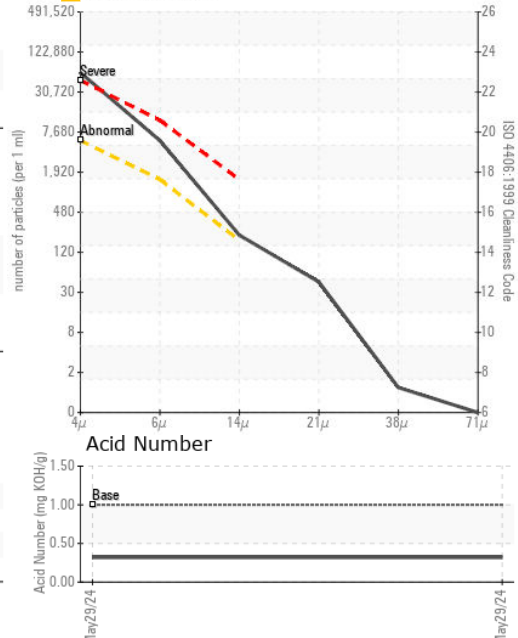

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007811

Lab Number : 06201435

Unique Number : 11063558

Test Package : CONST (Additional Tests: PQ)

Received : 06 Jun 2024

Tested : 07 Jun 2024

Diagnosed : 09 Jun 2024 - Don Baldrige

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT

P.O. BOX 412

NORTHPORT, AL

US 35476

Contact: PAMELA CLARK

pamela@warriortractor.com

T: (205)339-0300

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)