

OIL ANALYSIS REPORT


Sample Rating Trend

Machine Id

BRADEN RIG 55-B CRANE LOAD WINCH (S/N 0703448)

Starboard Hydraulic System

{not provided} (--- GAL)

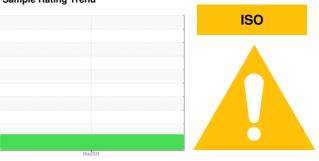

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

				May2024	,	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0037475		
Sample Date		Client Info		16 May 2024		
Machine Age	hrs	Client Info		6082		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20			
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	- <1		
Vanadium	ppm	ASTM D5185m	- = 0	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES	• • •	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		5		
Phosphorus	ppm	ASTM D5185m		362		
Zinc		ASTM D5185m		72		
	ppm					
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm		>15	5		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304		0.00		
ppm Water	ppm	ASTM D6304	>500	0		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>5000	<u>^</u> 33171		
Particles >6µm		ASTM D7647	>1300	<u>^</u> 2874		
Particles >14μm		ASTM D7647	>160	126		
Particles >21µm		ASTM D7647	>40	32		
Particles >38μm		ASTM D7647	>10	3		
Particles >71μm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>22/19/14</u>		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
A : I	1/011/	10711 00015				


Acid Number (AN)

mg KOH/g ASTM D8045

0.11



OIL ANALYSIS REPORT

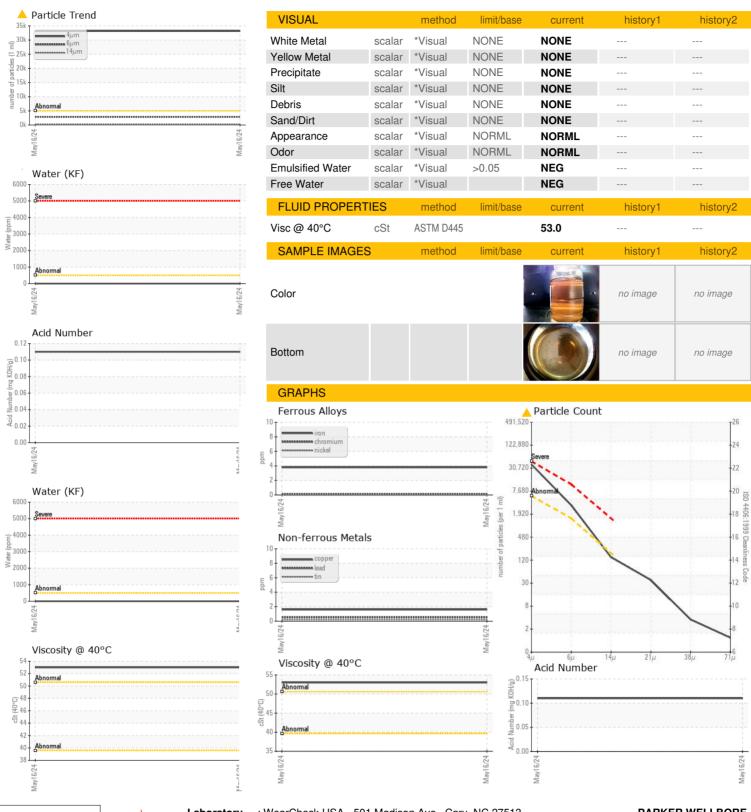



Certificate 12367

Laboratory Sample No. Lab Number

: RP0037475 : 06201489

Unique Number : 11063612 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 06 Jun 2024 Tested : 10 Jun 2024

Diagnosed : 10 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PARKER WELLBORE

1110 UNIFAB RD NEW IBERIA, LA US 70560

Contact: BRENT CARLINE

brent.carline@parkerwellbore.com T: (337)364-3122

F: (337)364-0232

Report Id: PARNEWLA [WUSCAR] 06201489 (Generated: 06/10/2024 08:35:42) Rev: 1

Contact/Location: BRENT CARLINE - PARNEWLA