




# OIL ANALYSIS REPORT

## Sample Rating Trend

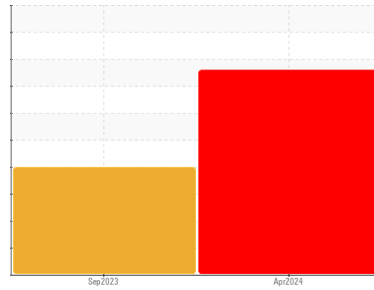

ISO



Area  
**HOWARD SHEPPARD**  
 Machine Id  
**2611 HOWARD SHEPPARD**  
 Component  
**Rear Differential**  
 Fluid  
**{not provided} (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. The water content is negligible.

#### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0934572</b>	WC0876055	---
Sample Date	Client Info		<b>13 Apr 2024</b>	26 Sep 2023	---
Machine Age	mls	Client Info	<b>171227</b>	107353	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>SEVERE</b>	SEVERE	---

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	<b>204</b>	115	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>7</b>	5	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>100	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>103</b>	83	---
Barium	ppm	ASTM D5185m		<b>1</b>	<1	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>7</b>	4	---
Magnesium	ppm	ASTM D5185m		<b>182</b>	170	---
Calcium	ppm	ASTM D5185m		<b>3</b>	5	---
Phosphorus	ppm	ASTM D5185m		<b>1597</b>	1613	---
Zinc	ppm	ASTM D5185m		<b>10</b>	6	---
Sulfur	ppm	ASTM D5185m		<b>24138</b>	23454	---

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>75	<b>15</b>	12	---
Sodium	ppm	ASTM D5185m		<b>6</b>	5	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Water	%	ASTM D6304	>.2	<b>0.009</b>	0.031	---
ppm Water	ppm	ASTM D6304	>2000	<b>94</b>	318	---

### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ <b>250141</b>	▲ 154197	---
Particles >6µm	ASTM D7647	>5000	▲ <b>155851</b>	▲ 74797	---
Particles >14µm	ASTM D7647	>640	▲ <b>8920</b>	▲ 2179	---
Particles >21µm	ASTM D7647	>160	▲ <b>1314</b>	● 316	---
Particles >38µm	ASTM D7647	>40	<b>19</b>	3	---
Particles >71µm	ASTM D7647	>10	<b>1</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ <b>25/24/20</b>	▲ 24/23/18	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.65</b>	0.59	---




# OIL ANALYSIS REPORT

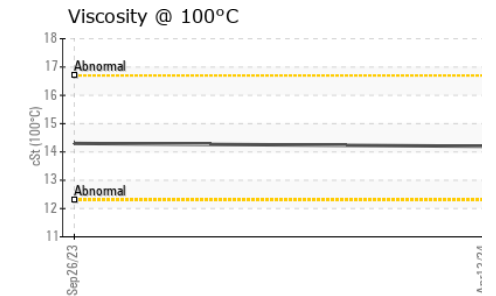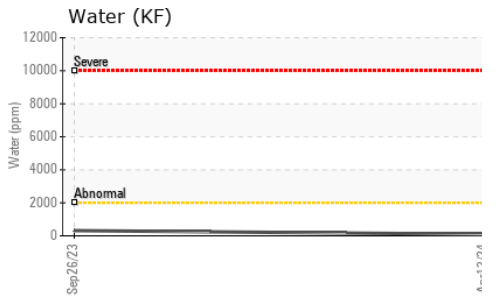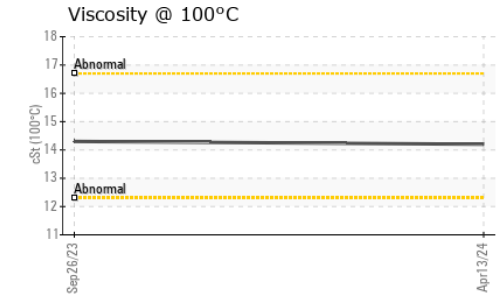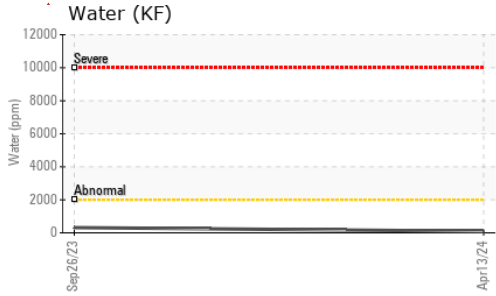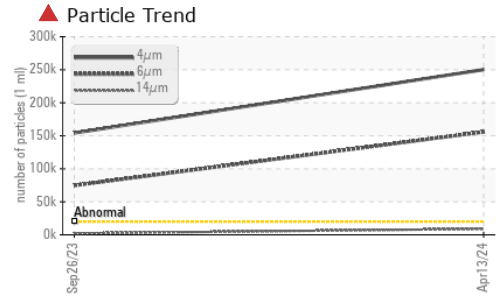






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	96.0	97.9	---
Visc @ 100°C	cSt	ASTM D445	14.2	14.3	---
Viscosity Index (VI)	Scale	ASTM D2270	152	150	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

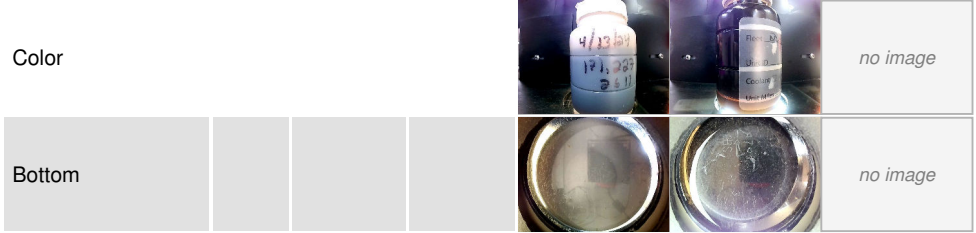

## GRAPHS

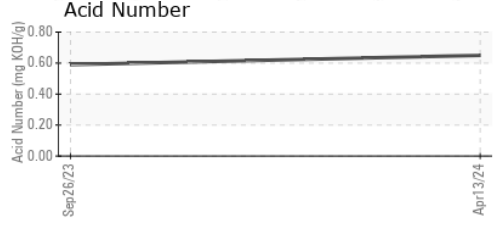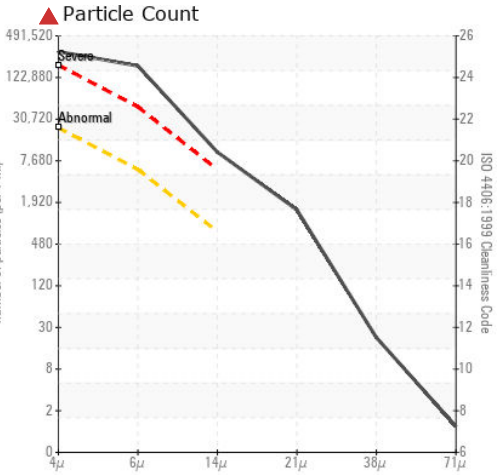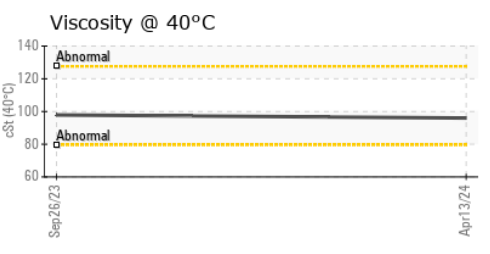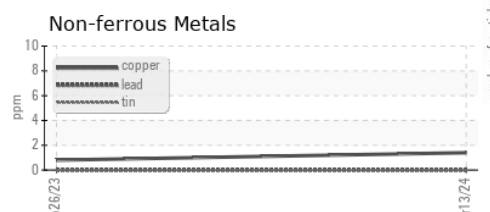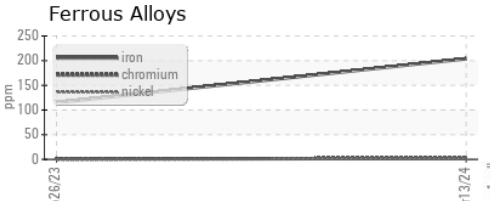

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0934572      **Received** : 06 Jun 2024  
**Lab Number** : 06201498      **Tested** : 07 Jun 2024  
**Unique Number** : 11063621      **Diagnosed** : 07 Jun 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, PrtCount, VI )

**BASF - GIANNA CREDAROLI**  
 500 WHITE PLAINS RD  
 TARRYTOWN, NY  
 US 10591  
 Contact: MIKE BARRY  
 mike.barry@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)