




OIL ANALYSIS REPORT

Sample Rating Trend

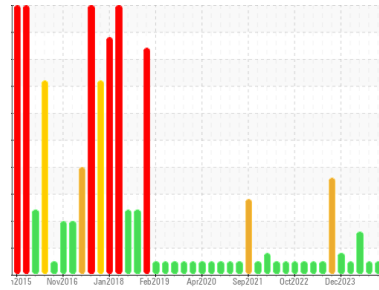

NORMAL



Area

FIBER

Machine Id

FIBER BROKE CENTER SLUSH MAKER 4

Component

Gearbox

Fluid

GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | RP0037928 | RP0030384 | RP0030315 |
| Sample Date | Client Info | | 05 Jun 2024 | 21 Mar 2024 | 13 Mar 2024 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | NORMAL | NORMAL | SEVERE |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|------------|------------------|--------------|----------|----------|
| PQ | ASTM D8184 | | 15 | 16 | 16 |
| Iron | ppm | ASTM D5185m >200 | 8 | 4 | 8 |
| Chromium | ppm | ASTM D5185m >15 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m >15 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | <1 | 0 | <1 |
| Silver | ppm | ASTM D5185m | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m >25 | 2 | 0 | <1 |
| Lead | ppm | ASTM D5185m >100 | <1 | 0 | 1 |
| Copper | ppm | ASTM D5185m >200 | <1 | 0 | 0 |
| Tin | ppm | ASTM D5185m >25 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | <1 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-----------------|------------|----------|----------|
| Boron | ppm | ASTM D5185m 50 | 30 | 19 | 26 |
| Barium | ppm | ASTM D5185m 15 | 1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 15 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m 50 | 3 | 0 | 0 |
| Calcium | ppm | ASTM D5185m 50 | 61 | 1 | 0 |
| Phosphorus | ppm | ASTM D5185m 350 | 412 | 378 | 402 |
| Zinc | ppm | ASTM D5185m 100 | 22 | 32 | 0 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >50 | 2 | 0 | <1 |
| Sodium | ppm | ASTM D5185m | <1 | 0 | 2 |
| Potassium | ppm | ASTM D5185m >20 | 2 | 0 | 2 |
| Water | % | ASTM D6304 >0.2 | 0.013 | 0.022 | 0.011 |
| ppm Water | ppm | ASTM D6304 >2000 | 134 | 229 | 118 |






FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|------------|
| Particles >4µm | ASTM D7647 | >20000 | 4842 | 1766 | ▲ 49516 |
| Particles >6µm | ASTM D7647 | >5000 | 218 | 460 | 2949 |
| Particles >14µm | ASTM D7647 | >640 | 9 | 51 | 13 |
| Particles >21µm | ASTM D7647 | >160 | 3 | 15 | 3 |
| Particles >38µm | ASTM D7647 | >40 | 0 | 2 | 0 |
| Particles >71µm | ASTM D7647 | >10 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | 19/15/10 | 18/16/13 | ▲ 23/19/11 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.85 | 0.89 | 1.02 | 0.92 |


OIL ANALYSIS REPORT

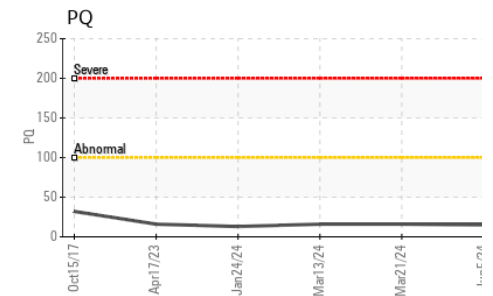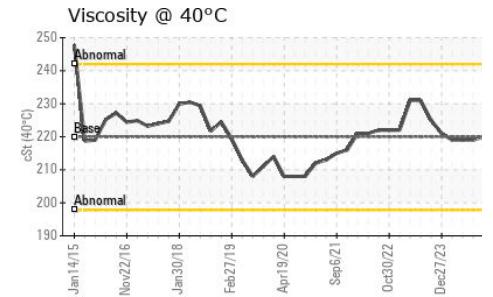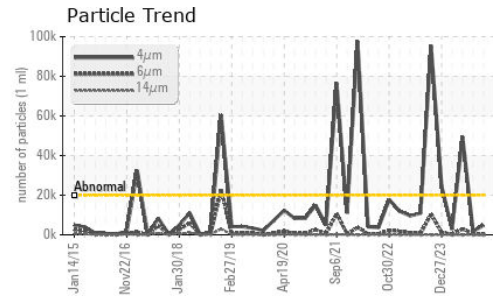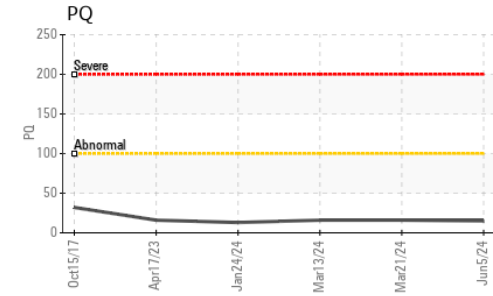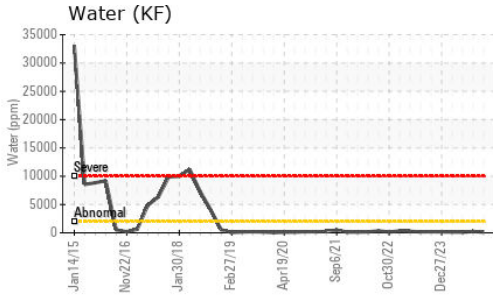





| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 220 | 219 | 219 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

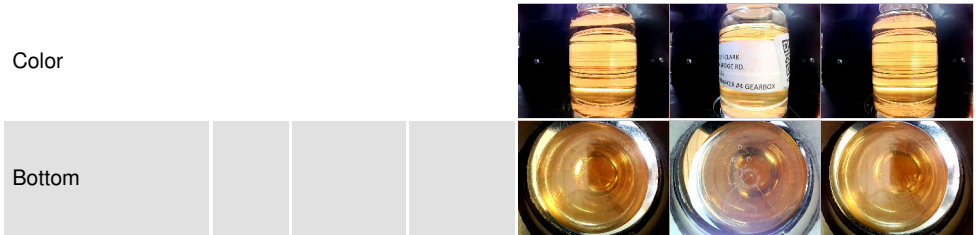

GRAPHS

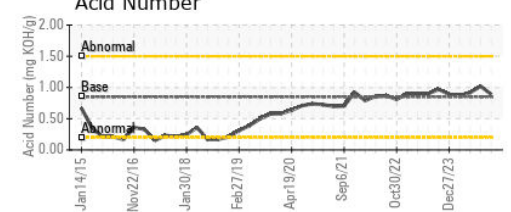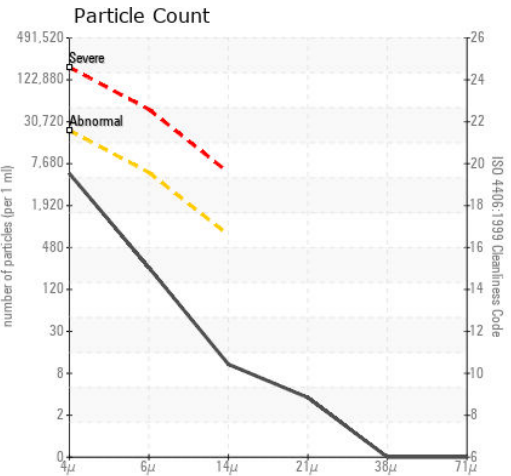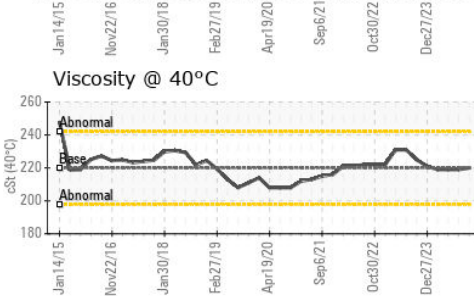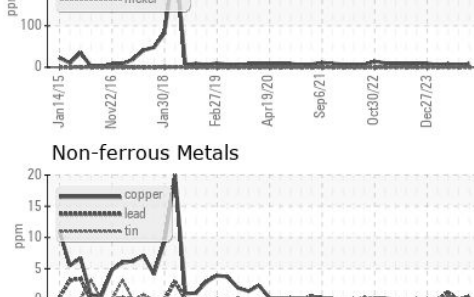

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0037928
Lab Number : 06201509
Unique Number : 11063632
Test Package : IND 2 (Additional Tests: PQ, PrtCount)

Kimberly-Clark - Mobile - Fiber - BC UNITS
 200 BAYBRIDGE RD
 MOBILE, AL
 US 36610

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: MARK BOSARGE
 Mark.W.Bosarge@kcc.com
 T: (251)330-2221
 F: (251)452-6335