




OIL ANALYSIS REPORT

Sample Rating Trend

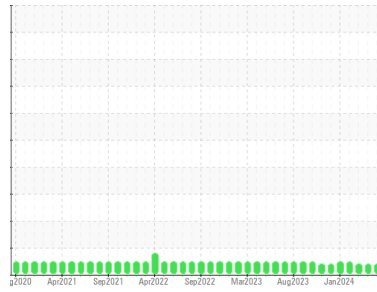

VISCOSITY



Area

Kentucky

Machine Id

[Kentucky] Oil - Starboard Reduction Gear

Component

Starboard Reduction Gear

Fluid

SAE 30W (26 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0845803	WC0845805	WC0874822
Sample Date	Client Info		25 May 2024	25 Apr 2024	16 Mar 2024
Machine Age	hrs	Client Info	14962	14434	13554
Oil Age	hrs	Client Info	1679	1151	271
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ATTENTION	ATTENTION	ATTENTION

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	8	7	2
Chromium	ppm	ASTM D5185m >10	<1	<1	0
Nickel	ppm	ASTM D5185m >10	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	1	0
Aluminum	ppm	ASTM D5185m >25	2	1	1
Lead	ppm	ASTM D5185m >100	<1	<1	0
Copper	ppm	ASTM D5185m >50	3	3	4
Tin	ppm	ASTM D5185m >10	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	69	56	63
Barium	ppm	ASTM D5185m	<1	2	0
Molybdenum	ppm	ASTM D5185m	23	22	24
Manganese	ppm	ASTM D5185m	0	<1	0
Magnesium	ppm	ASTM D5185m	350	322	333
Calcium	ppm	ASTM D5185m	674	630	688
Phosphorus	ppm	ASTM D5185m	821	787	849
Zinc	ppm	ASTM D5185m	589	537	565
Sulfur	ppm	ASTM D5185m	10108	9181	10225

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	1	4	1
Sodium	ppm	ASTM D5185m	<1	<1	<1
Potassium	ppm	ASTM D5185m >20	1	2	1
Water	%	ASTM D6304 >0.1	0.020	0.007	0.010
ppm Water	ppm	ASTM D6304 >1000	203	74	108

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.09	1.21	1.37




OIL ANALYSIS REPORT

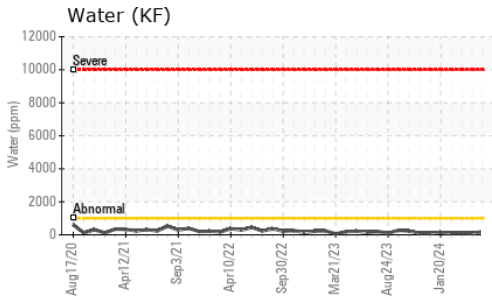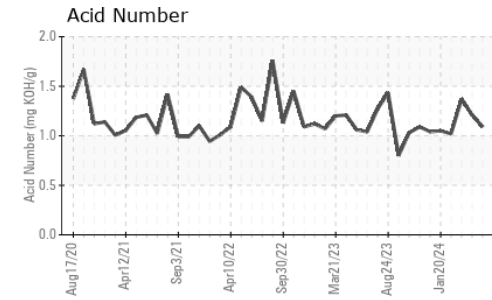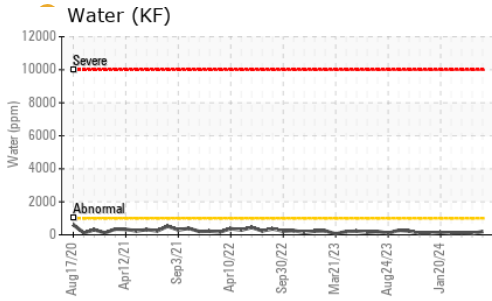





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	95.0 ● 147	● 152	● 155

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

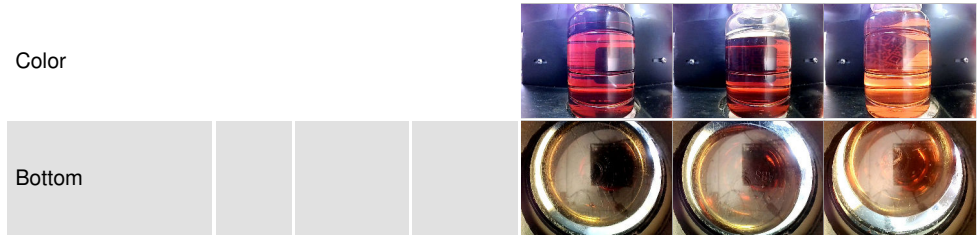

GRAPHS

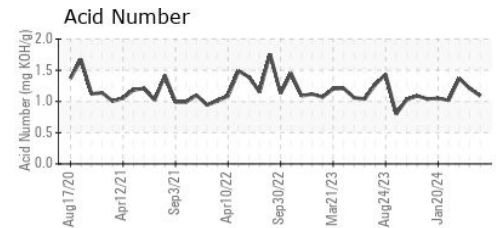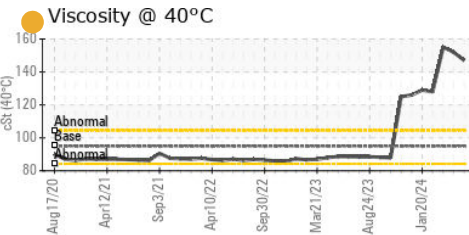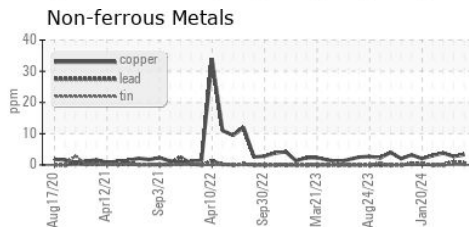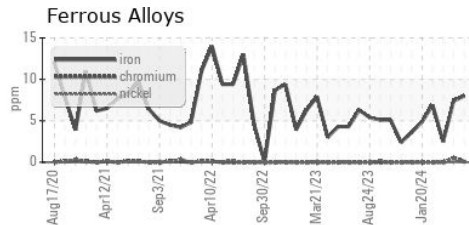

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0845803

Lab Number : 06201562

Unique Number : 11063685

Test Package : IND 2 (Additional Tests: KF, PQ)

Received : 06 Jun 2024

Tested : 10 Jun 2024

Diagnosed : 10 Jun 2024 - Angela Borella

MARATHON PETROLEUM CO.

101 12TH ST

CATLETTSBURG, KY

US 41169

Contact: CORY GUMBERT

cagumbert@marathonpetroleum.com

T: (606)585-3950

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)