




# OIL ANALYSIS REPORT

Sample Rating Trend

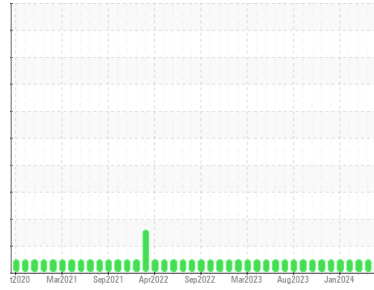

**NORMAL**



Area  
**Kentucky**  
 Machine Id  
**[Kentucky] Oil - Port Main Engine**  
 Component  
**Port Main Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (216 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>WC0874591</b>	WC0845806	WC0874827	
Sample Date	Client Info	<b>25 May 2024</b>	25 Apr 2024	16 Mar 2024	
Machine Age	hrs	Client Info	<b>14978</b>	14450	13560
Oil Age	hrs	Client Info	<b>935</b>	406	1453
Oil Changed	Client Info	<b>N/A</b>	N/A	Oil Added	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >75	<b>2</b>	1	8
Chromium	ppm	ASTM D5185m >8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m >18	<b>1</b>	<1	3
Copper	ppm	ASTM D5185m >80	<b>1</b>	2	5
Tin	ppm	ASTM D5185m >14	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	<b>0</b>	10	19
Barium	ppm	ASTM D5185m 10	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 100	<b>66</b>	58	59
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>1652</b>	1328	1117
Calcium	ppm	ASTM D5185m 3000	<b>1400</b>	1186	1345
Phosphorus	ppm	ASTM D5185m 1150	<b>1237</b>	1043	1096
Zinc	ppm	ASTM D5185m 1350	<b>1555</b>	1234	1299
Sulfur	ppm	ASTM D5185m 4250	<b>4568</b>	3333	3230

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<b>3</b>	4	4
Sodium	ppm	ASTM D5185m >158	<b>2</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Water	%	ASTM D6304 >0.1	<b>NEG</b>	NEG	NEG

## INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.6</b>	7.4	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	19.5	22.6


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.3</b>	15.6	21.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>12.51</b>	11.87	11.14




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

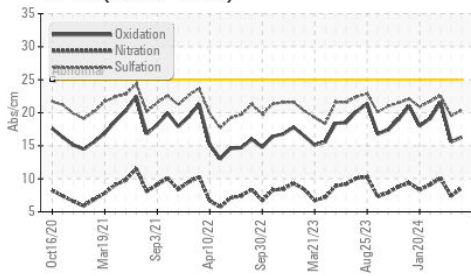

Base Number

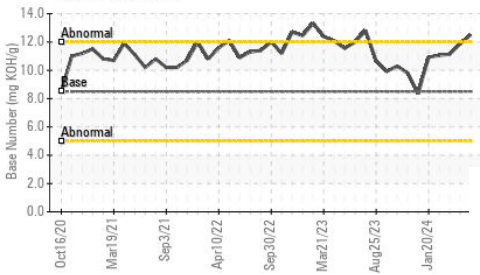

Viscosity @ 100°C

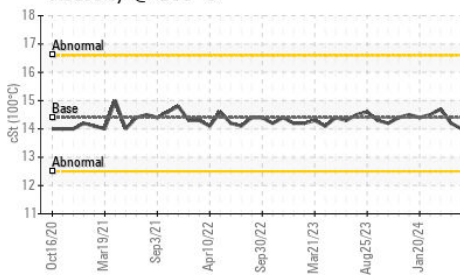


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.0</b>	14.2	14.7

## GRAPHS


Ferrous Alloys

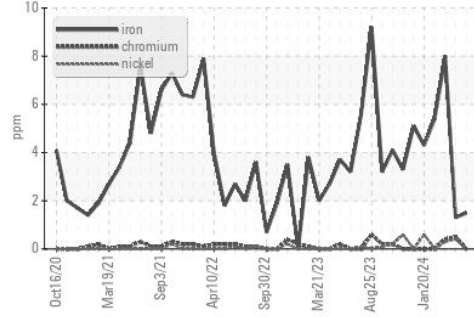


Non-ferrous Metals

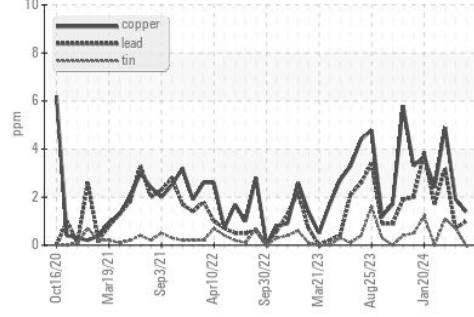

Viscosity @ 100°C

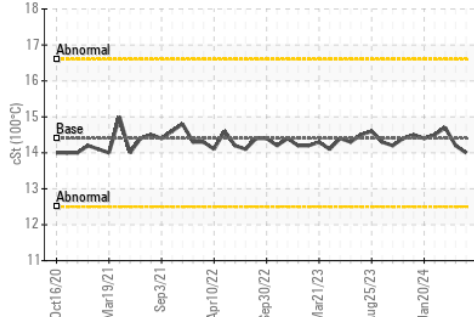

Base Number

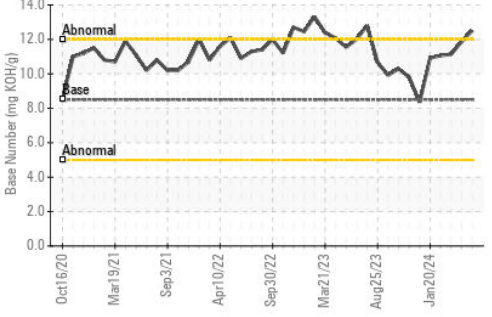

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0874591      **Received** : 06 Jun 2024  
**Lab Number** : **06201647**      **Tested** : 11 Jun 2024  
**Unique Number** : 11063770      **Diagnosed** : 11 Jun 2024 - Sean Felton  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)