




OIL ANALYSIS REPORT

Sample Rating Trend

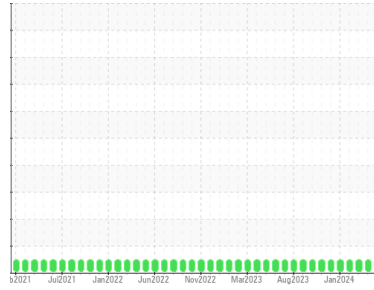

NORMAL



Area

Detroit

Machine Id

[Detroit] Oil - Port Main Engine

Component

Port Main Engine

Fluid

MOBIL 15W40 (150 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Completed by Jeff Baldwin)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0804768	WC0804785	WC0804777
Sample Date	Client Info	20 May 2024	22 Apr 2024	25 Mar 2024
Machine Age	hrs Client Info	20693	20091	19472
Oil Age	hrs Client Info	12276	11674	11055
Oil Changed	Client Info	Not Changed	N/A	Not Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Water	WC Method >0.1	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	68	73	59
Chromium	ppm ASTM D5185m >8	<1	1	<1
Nickel	ppm ASTM D5185m >2	0	<1	0
Titanium	ppm ASTM D5185m >3	0	<1	0
Silver	ppm ASTM D5185m >2	0	<1	0
Aluminum	ppm ASTM D5185m >15	2	4	3
Lead	ppm ASTM D5185m >18	24	28	21
Copper	ppm ASTM D5185m >80	15	18	13
Tin	ppm ASTM D5185m >14	1	3	2
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	56	74	64
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	47	51	43
Manganese	ppm ASTM D5185m	<1	<1	1
Magnesium	ppm ASTM D5185m	729	742	689
Calcium	ppm ASTM D5185m	2423	2347	2090
Phosphorus	ppm ASTM D5185m	912	991	844
Zinc	ppm ASTM D5185m	1111	1133	1027
Sulfur	ppm ASTM D5185m	4220	3711	3950

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	4	6	3
Sodium	ppm ASTM D5185m >118	6	4	5
Potassium	ppm ASTM D5185m >20	2	5	1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.3	0.5	0.5
Nitration	Abs./cm *ASTM D7624 >20	11.6	15.5	15.2
Sulfation	Abs./1mm *ASTM D7415 >30	24.3	29.9	29.5


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414 >25	25.4	36.6	35.5
Base Number (BN)	mg KOH/g ASTM D2896	7.14	7.20	6.94




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

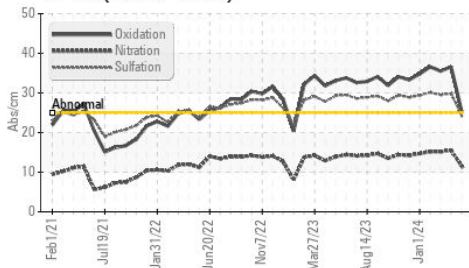

Base Number

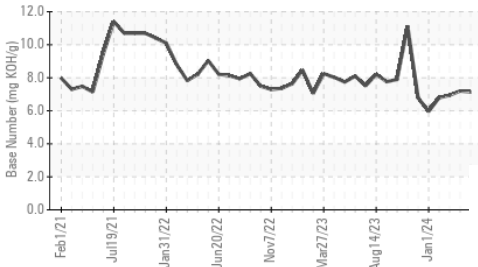

Viscosity @ 100°C

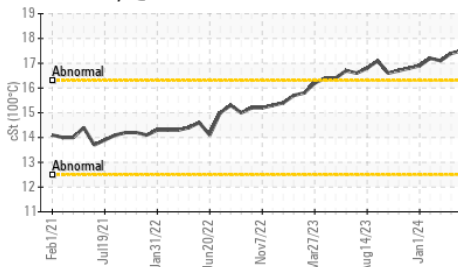


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	17.5	17.4	17.1

GRAPHS


Ferrous Alloys

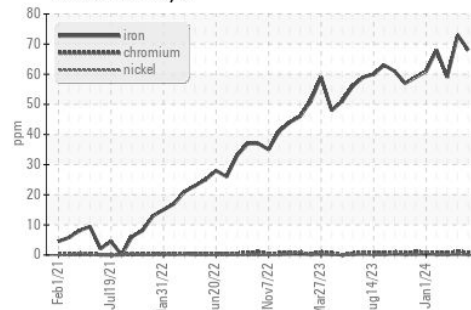


Non-ferrous Metals

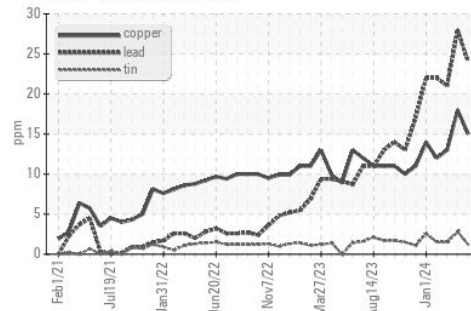

Viscosity @ 100°C

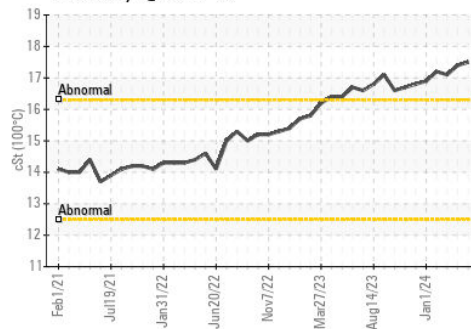

Base Number

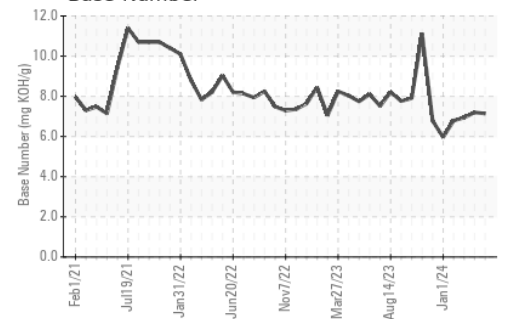

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0804768
 Lab Number : 06201661
 Unique Number : 11063784
 Test Package : IND 2

Received : 06 Jun 2024
 Tested : 17 Jun 2024
 Diagnosed : 17 Jun 2024 - Sean Felton

MARATHON PETROLEUM CO.
 101 12TH ST
 CATLETTSBURG, KY
 US 41169

Contact: CORY GUMBERT
 cagumbert@marathonpetroleum.com
 T: (606)585-3950

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x