




# GREASE ANALYSIS

Sample Rating Trend

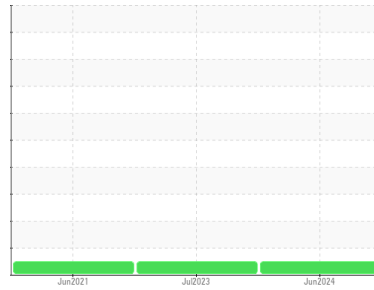

**NORMAL**



Area  
**MELT SHOP**  
 Machine Id  
**LADLE TURRETT - 10:30**  
 Component  
**Upper Grease**  
 Fluid  
**{not provided} (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Grease Condition

The condition of the grease is acceptable for the time in service.

### Contaminants

There is no indication of any contamination in the grease.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RP0044185</b>	RP0035071	WCI2276159
Sample Date	Client Info			<b>05 Jun 2024</b>	07 Jul 2023	13 Jun 2021
Machine Age	hrs	Client Info		<b>0</b>	0	0
Grease Age	hrs	Client Info		<b>0</b>	0	0
Grease Serviced	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>250	<b>28</b>	6	0
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	2
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>3</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Lead	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>75	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>246</b>	42	0
Magnesium	ppm	ASTM D5185m		<b>66</b>	14	<1
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Phosphorus	ppm	ASTM D5185m		<b>85</b>	15	0
Zinc	ppm	ASTM D5185m		<b>0</b>	5	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0

THICKENER/SOAP		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m		<b>16</b>	2	0
Barium	ppm	ASTM D5185m		<b>2</b>	1	0
Calcium	ppm	ASTM D5185m		<b>41575</b>	7577	0
Sodium	ppm	ASTM D5185m		<b>16</b>	14	24
Lithium	ppm	ASTM D5185m		<b>51</b>	18	0





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>150	<b>16</b>	5	0
Potassium	ppm	ASTM D5185m		<b>38</b>	9	2
Water	%	ASTM D6304	>0.1	<b>NEG</b>	NEG	0.043
ppm Water	ppm	ASTM D6304	>1000	<b>---</b>	---	430

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

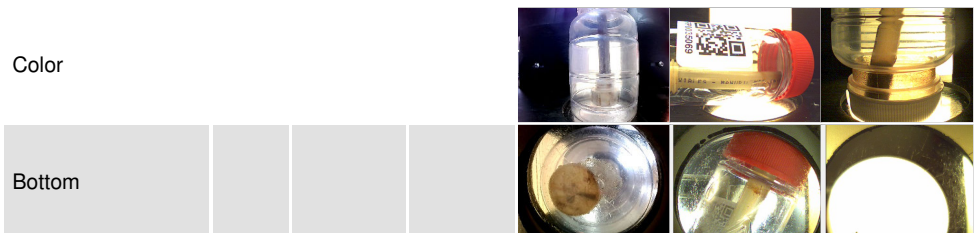

# GREASE ANALYSIS

## GRAPHS

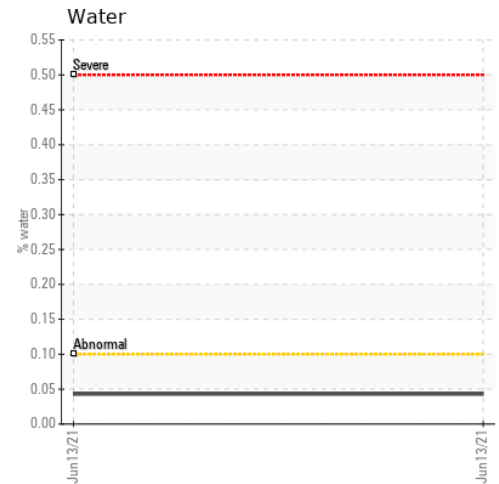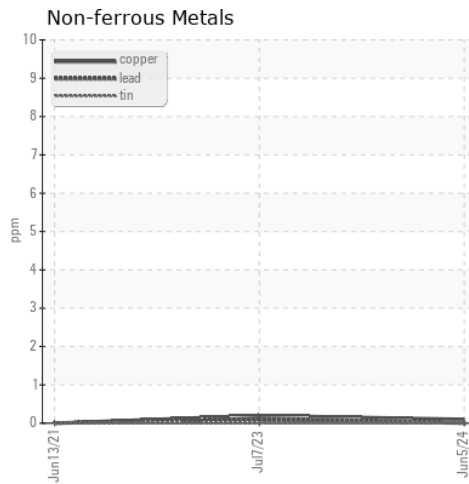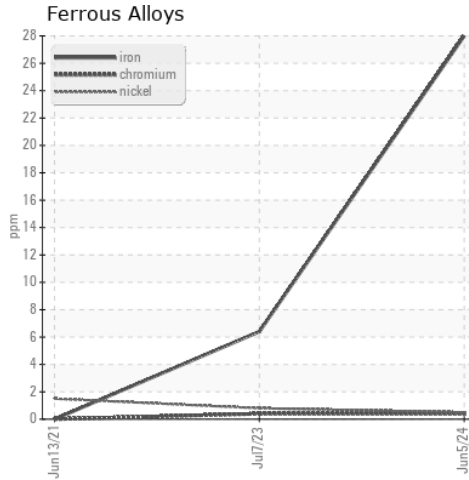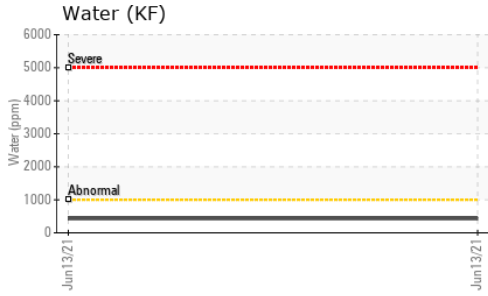

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0044185      **Received** : 06 Jun 2024  
**Lab Number** : 06201944      **Tested** : 20 Jun 2024  
**Unique Number** : 11069405      **Diagnosed** : 20 Jun 2024 - Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: PQ )

**OUTOKUMPU STAINLESS USA**  
 HWY 43 N  
 CALVERT, AL 36513  
 Contact: MARIO JOHNSON  
 Mario.johnson@outokumpu.com  
 T: (251)321-4105  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)