




# OIL ANALYSIS REPORT

## Sample Rating Trend

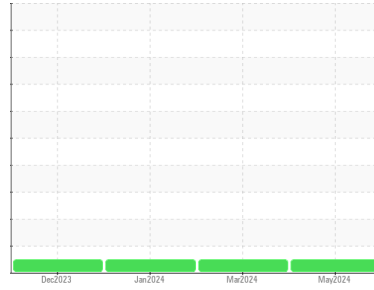

**NORMAL**



Area

**IRIG [7051558]**

Machine Id

**IRIG-RF-DW-2302 IRIG-RF-DW-2302 DRAW WORKS**

Component

**Gearbox**

Fluid

**GEAR OIL SAE 80W90 (40 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HLC0003054</b>	HLC0003069	HLC0003030
Sample Date	Client Info			<b>28 May 2024</b>	22 Mar 2024	19 Jan 2024
Machine Age	mths	Client Info		<b>0</b>	0	0
Oil Age	mths	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Filtered</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>2</b>	3	2
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	1	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	1	0
Copper	ppm	ASTM D5185m	>200	<b>0</b>	1	<1
Tin	ppm	ASTM D5185m	>25	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	1	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>113</b>	137	118
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	12	<b>0</b>	1	0
Calcium	ppm	ASTM D5185m	150	<b>4</b>	8	3
Phosphorus	ppm	ASTM D5185m	1650	<b>460</b>	503	437
Zinc	ppm	ASTM D5185m	125	<b>8</b>	9	7
Sulfur	ppm	ASTM D5185m	22500	<b>10568</b>	10675	9677

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>&lt;1</b>	1	<1
Sodium	ppm	ASTM D5185m	>170	<b>1</b>	0	1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>2834</b>	5581	1723
Particles >6µm		ASTM D7647	>2500	<b>754</b>	1195	313
Particles >14µm		ASTM D7647	>320	<b>48</b>	76	20
Particles >21µm		ASTM D7647	>80	<b>10</b>	16	7
Particles >38µm		ASTM D7647	>20	<b>1</b>	2	1
Particles >71µm		ASTM D7647	>4	<b>0</b>	1	1
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>19/17/13</b>	20/17/13	18/15/11

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	<b>0.91</b>	1.13	0.80


# OIL ANALYSIS REPORT

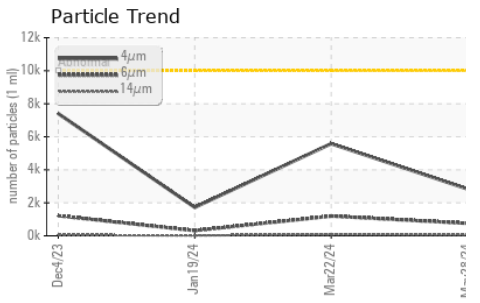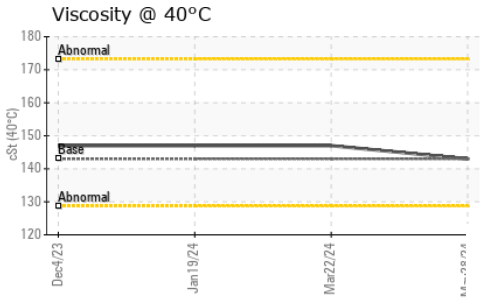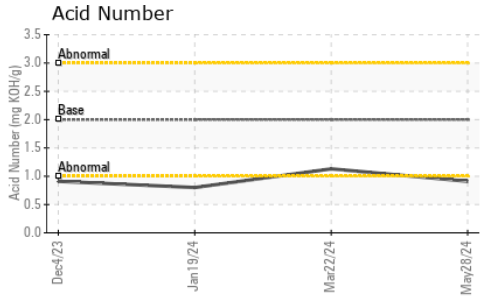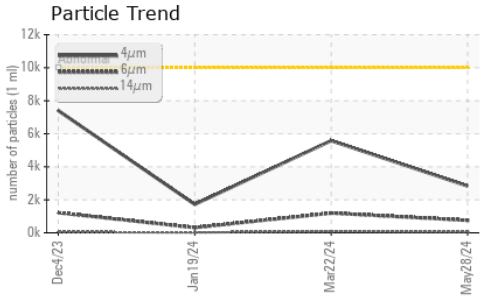






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 143	<b>143</b>	147	147

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

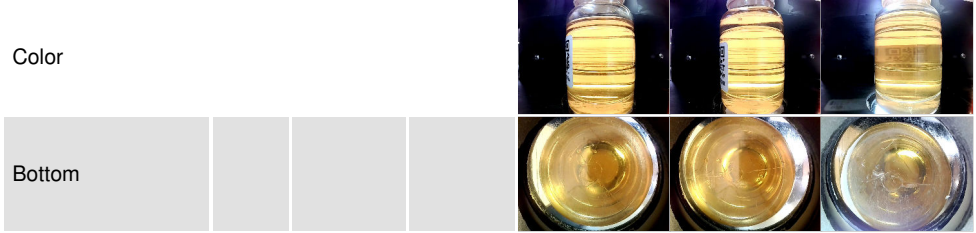

## GRAPHS

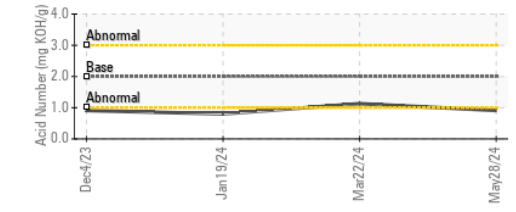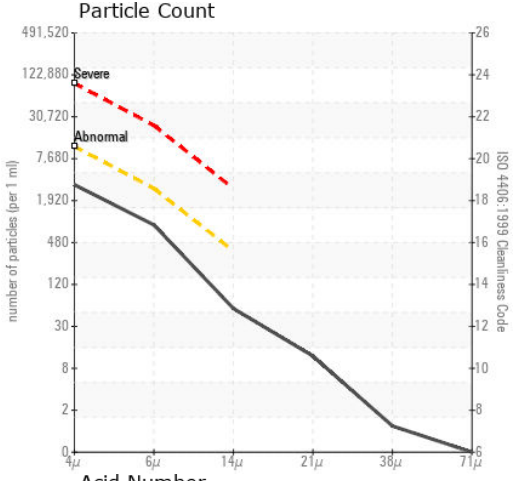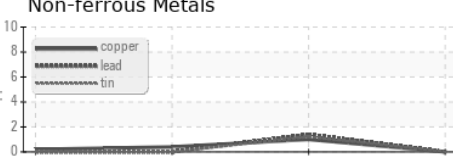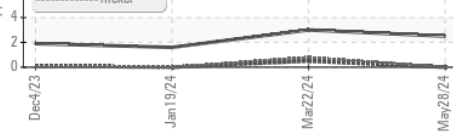

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HLC0003054      **Received** : 06 Jun 2024  
**Lab Number** : 06202000      **Tested** : 07 Jun 2024  
**Unique Number** : 11069461      **Diagnosed** : 09 Jun 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**HILCORP EXPLORATION ALASKA - MILNE POINT**  
 1000 MILNE POINT RD  
 PRUDOE BAY, AK  
 US 99734

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Evan Reilly  
 evan.reilly@hilcorp.com  
 T: (907)670-3231  
 F: x: