




# OIL ANALYSIS REPORT

Sample Rating Trend

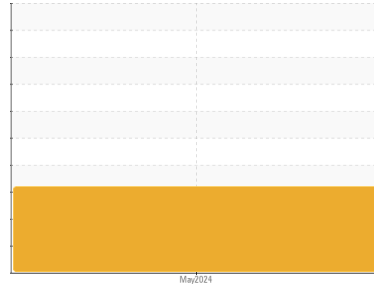

**WATER**



Machine Id  
**8941395 (S/N 1045)**  
 Component  
**Compressor**  
 Fluid  
**G-680 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA017755</b>	---	---
Sample Date	Client Info		<b>15 May 2024</b>	---	---
Machine Age	hrs	Client Info	<b>7899</b>	---	---
Oil Age	hrs	Client Info	<b>7899</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>1</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >3	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m >3	<b>1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>1</b>	---	---
Aluminum	ppm	ASTM D5185m >10	<b>1</b>	---	---
Lead	ppm	ASTM D5185m >10	<b>1</b>	---	---
Copper	ppm	ASTM D5185m >50	<b>6</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>1</b>	---	---
Antimony	ppm	ASTM D5185m	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>1</b>	---	---






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>1</b>	---	---
Barium	ppm	ASTM D5185m	<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>1</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>17</b>	---	---
Zinc	ppm	ASTM D5185m	<b>1</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>17016</b>	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>1</b>	---	---
Sodium	ppm	ASTM D5185m	<b>1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Water	%	ASTM D6304 >0.05	<b>▲ 0.101</b>	---	---
ppm Water	ppm	ASTM D6304 >500	<b>▲ 1014</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>4358</b>	---	---
Particles >6µm	ASTM D7647 >1300		<b>● 1477</b>	---	---
Particles >14µm	ASTM D7647 >80		<b>● 144</b>	---	---
Particles >21µm	ASTM D7647 >20		<b>● 36</b>	---	---
Particles >38µm	ASTM D7647 >4		<b>1</b>	---	---
Particles >71µm	ASTM D7647 >3		<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >--/17/13		<b>● 19/18/14</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.15</b>	---	---

# OIL ANALYSIS REPORT

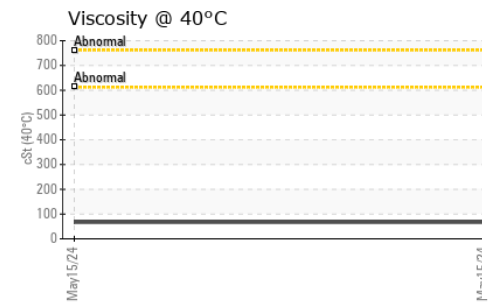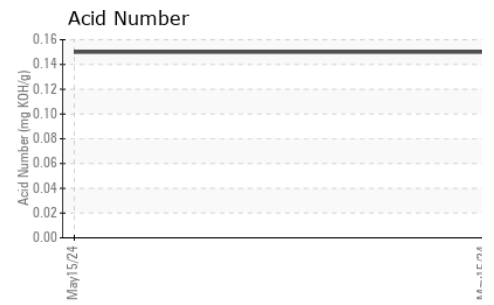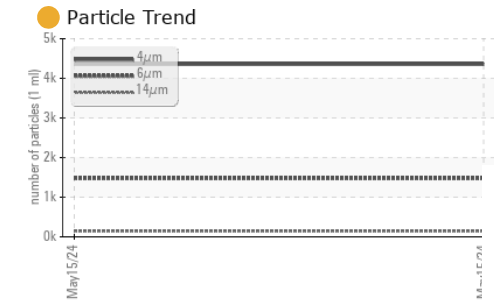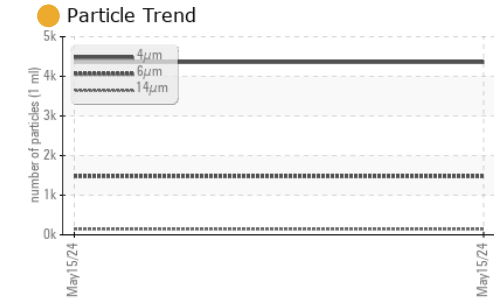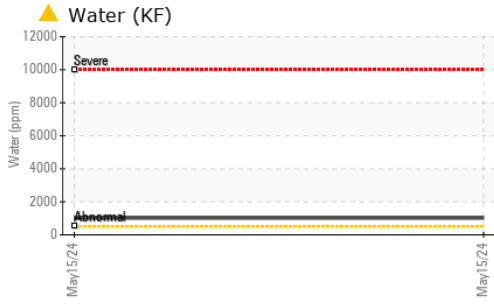






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	66.9	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

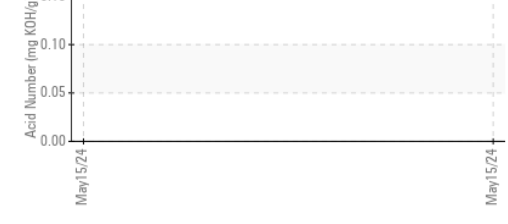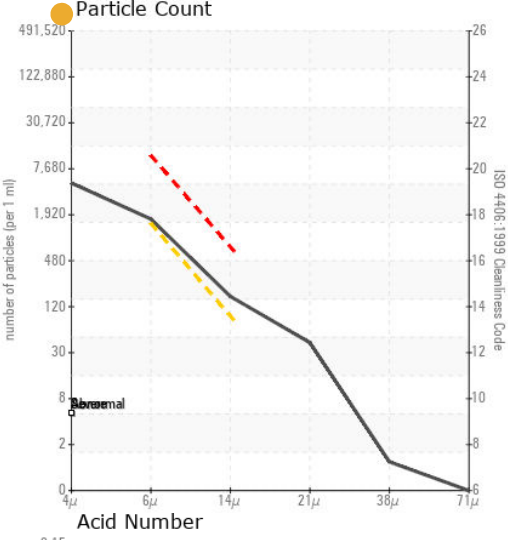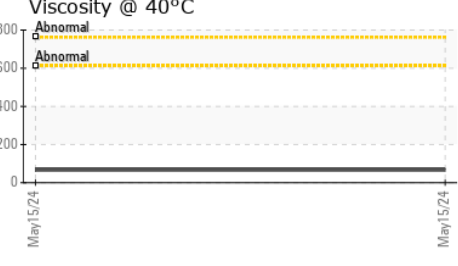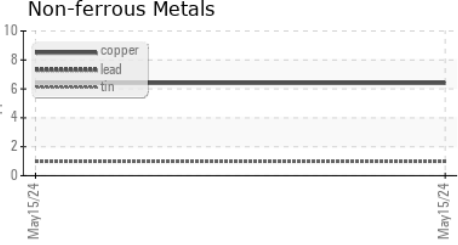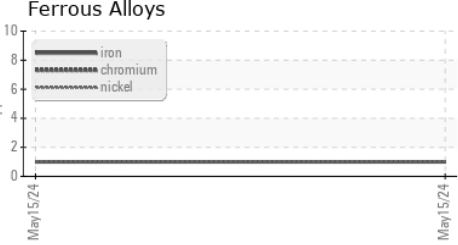

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA017755 **Received** : 06 Jun 2024  
**Lab Number** : 06202020 **Tested** : 07 Jun 2024  
**Unique Number** : 11069481 **Diagnosed** : 09 Jun 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**UNIVERSAL COMPRESSED AIR c/o IMERYS**  
 1301 GENE E STEWART BLVD  
 SYLACAUGA, AL 35151  
 Contact: B. ATKINS  
 batkins@ucaair.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)