


OIL ANALYSIS REPORT

SAMPLE INFORMATION method

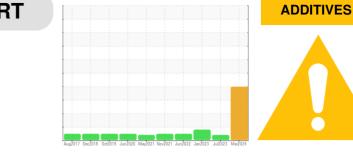

current

history1

historv2

Sample Rating Trend

limit/base

Machine Id

KAESER AS 25 5806675 (S/N 1336)

Component Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type. The AN level is acceptable for this fluid.


SAMPLE INFOR	VIATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013911	KCPA004062	KCP54342
Sample Date		Client Info		15 Mar 2024	14 Jul 2023	06 Jan 2023
Machine Age	hrs	Client Info		44902	40415	36666
Oil Age	hrs	Client Info		4356	0	4663
Oil Changed		Client Info		Changed	N/A	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm		>50	7	8	14
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m		1 3	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	Ū	0	0	0
Magnesium	ppm	ASTM D5185m	100	28	<1	8
Calcium	ppm	ASTM D5185m		143	0	0
Phosphorus	ppm	ASTM D5185m	0	91	0	10
Zinc	ppm	ASTM D5185m		106	0	2
Sulfur	ppm	ASTM D5185m	23500	17968	23470	23780
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	1
Sodium	ppm	ASTM D5185m		4	2	4
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water	%	ASTM D6304	>0.05	0.012	0.006	0.009
ppm Water	ppm	ASTM D6304	>500	124	69.5	91.3
FLUID CLEANLI	VESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8049	988	7911
Particles >6µm		ASTM D7647	>1300	<u> </u>	307	2291
Particles >14µm		ASTM D7647	>80	406	26	67
Particles >21µm		ASTM D7647	>20	<u> </u>	8	10
Particles >38µm		ASTM D7647	>4	<u> </u>	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 20/19/16	17/15/12	20/18/13
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34	0.15	0.20


Contact/Location: ISMAEL ? - SCECHA Page 1 of 2





OIL ANALYSIS REPORT

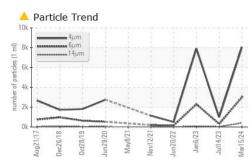




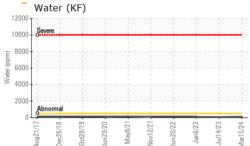

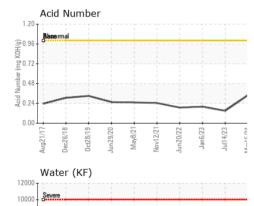



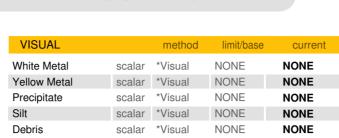

Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	50.1	▲ 54.55	51.2
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



history1

NONE

NONE

NONE

NONE

history2


NONE

NONE

NONE

NONE

Bottom

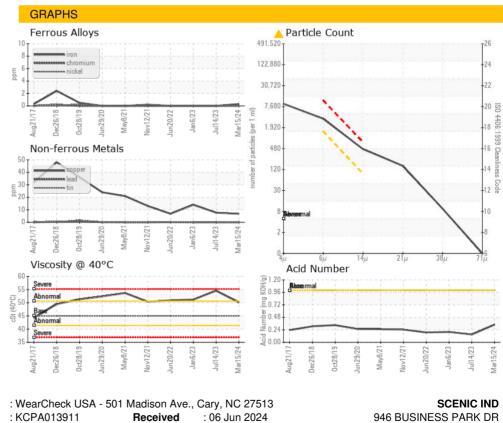





Sample No. Lab Number : 06202023 Unique Number : 11069484

Received Tested : 07 Jun 2024 Diagnosed : 09 Jun 2024 - Don Baldridge Test Package : IND 2 (Additional Tests: KF, PrtCount)

946 BUSINESS PARK DR CHATTANOOGA, TN US 37419 Contact: ISMAEL ismael@scenicind.com T: F:

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ISMAEL ? - SCECHA