




OIL ANALYSIS REPORT

Sample Rating Trend

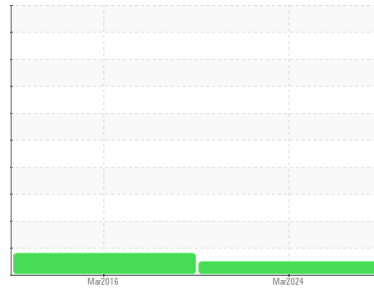

Machine Id
KAESER SM 11 1960324 (S/N 1519)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA013891	KCP48268	---
Sample Date	Client Info		14 Mar 2024	09 Mar 2016	---
Machine Age	hrs	Client Info	8605	7242	---
Oil Age	hrs	Client Info	8605	4000	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	ATTENTION	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	1	---
Chromium	ppm	ASTM D5185m >10	0	<1	---
Nickel	ppm	ASTM D5185m >3	0	<1	---
Titanium	ppm	ASTM D5185m >3	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >10	0	0	---
Lead	ppm	ASTM D5185m >10	2	0	---
Copper	ppm	ASTM D5185m >50	6	13	---
Tin	ppm	ASTM D5185m >10	0	2	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	<1	---
Barium	ppm	ASTM D5185m 90	0	0	---
Molybdenum	ppm	ASTM D5185m 0	0	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m 100	21	23	---
Calcium	ppm	ASTM D5185m 0	0	<1	---
Phosphorus	ppm	ASTM D5185m 0	11	65	---
Zinc	ppm	ASTM D5185m 0	19	22	---
Sulfur	ppm	ASTM D5185m 23500	21751	17630	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	<1	---
Sodium	ppm	ASTM D5185m	11	13	---
Potassium	ppm	ASTM D5185m >20	<1	1	---
Water	%	ASTM D6304 >0.05	0.019	0.009	---
ppm Water	ppm	ASTM D6304 >500	190	90	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		206	1000	---
Particles >6µm	ASTM D7647	>1300	88	544	---
Particles >14µm	ASTM D7647	>80	21	92	---
Particles >21µm	ASTM D7647	>20	8	31	---
Particles >38µm	ASTM D7647	>4	1	4	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	15/14/12	16/14	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.37	0.352	---


OIL ANALYSIS REPORT

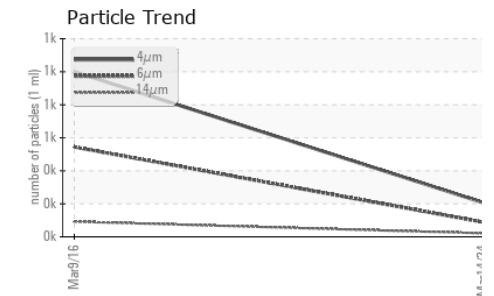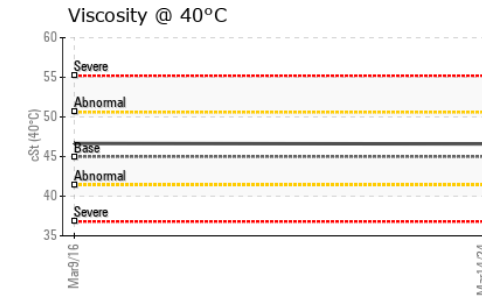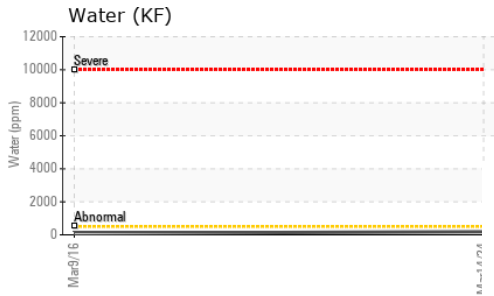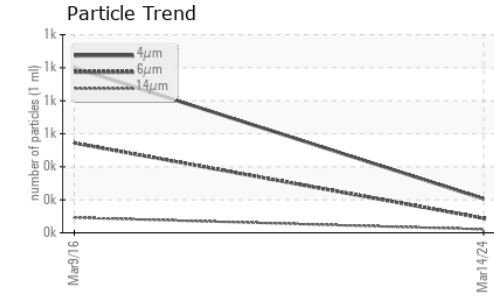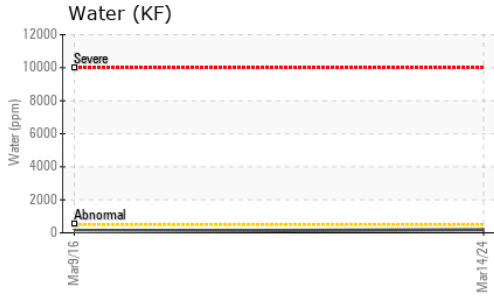






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.6	46.66

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

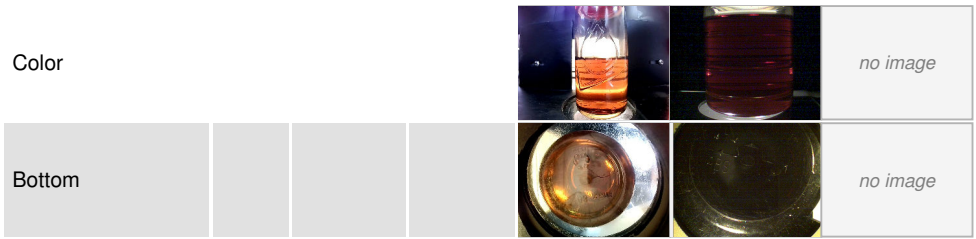

GRAPHS

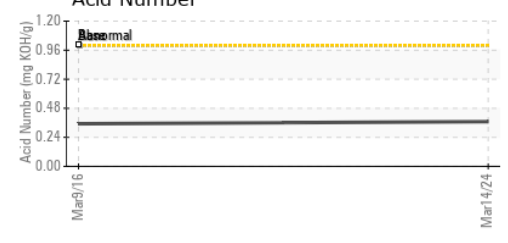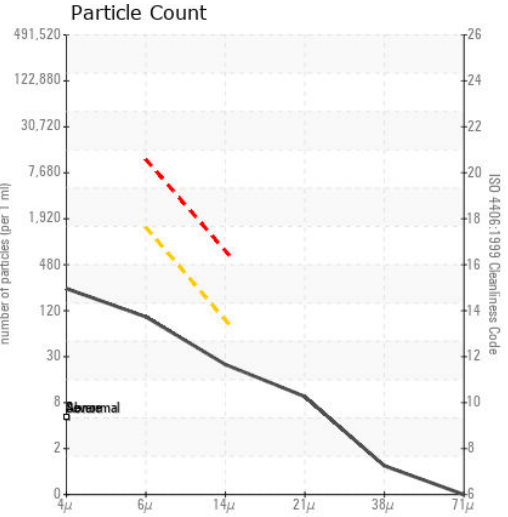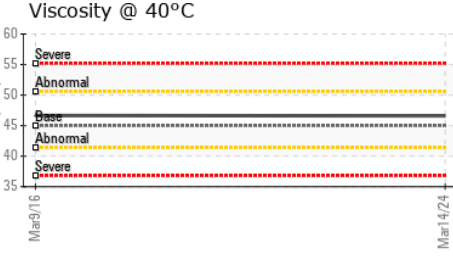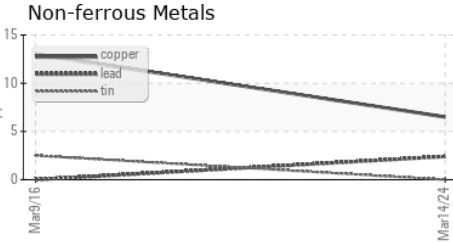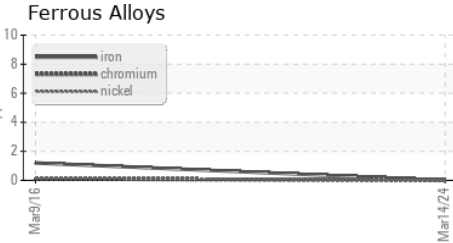

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA013891 **Received** : 06 Jun 2024
Lab Number : 06202025 **Tested** : 07 Jun 2024
Unique Number : 11069486 **Diagnosed** : 09 Jun 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

EMANON MANUFACTURING
 4125 S CREEK RD
 CHATTANOOGA, TN
 US 37406
 Contact: R. JENKINS
 rjenkins@emanonmfg.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)