


OIL ANALYSIS REPORT



Machine Id

KAESER BSD 50 4764919 (S/N 1013)

Component Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015065	KCPA005607	KCP47027
Sample Date		Client Info		20 Mar 2024	26 Jul 2023	09 Nov 2022
Machine Age	hrs	Client Info		69740	66407	63329
Oil Age	hrs	Client Info		6230	0	3816
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	3	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	2
Aluminum	ppm	ASTM D5185m	>10	0	1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	3	16	8
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	<1	3	2
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	1	0	2
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	23500	20369	25135	21422
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	0
Sodium	ppm	ASTM D5185m		2	4	0
Potassium	ppm	ASTM D5185m	>20	0	2	2
Water	%	ASTM D6304	>0.05	0.004	▲ 0.096	0.006
ppm Water	ppm	ASTM D6304	>500	43	▲ 960	67.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		98		11767
Particles >6µm		ASTM D7647	>1300	41		<u> </u>
Particles >14µm		ASTM D7647	>80	4		A 256
Particles >21µm		ASTM D7647	>20	2		<u> </u>
Particles >38µm		ASTM D7647	>4	0		3
Particles >71µm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>/17/13	14/13/9		2 1/19/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.49	0.51	0.45




OIL ANALYSIS REPORT












Bottom

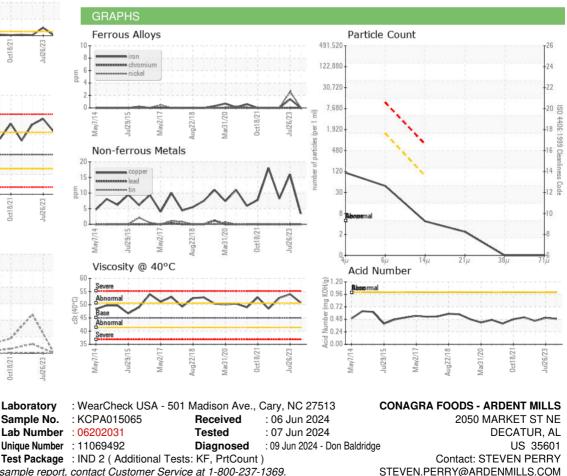

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CONDEC [WUSCAR] 06202031 (Generated: 06/09/2024 17:54:12) Rev: 1

Certificate 12367

Contact/Location: STEVEN PERRY - CONDEC

T:

F: