




# OIL ANALYSIS REPORT

Sample Rating Trend

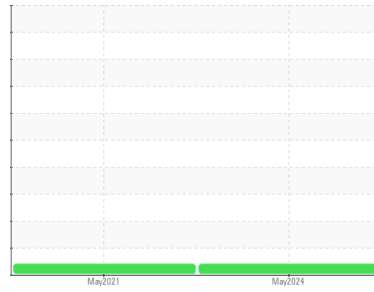

VIS DEBRIS



Machine Id  
**1210780 (S/N 1029)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number      | Client Info |             |            | <b>KCPA012376</b>  | KCP36658    | ---      |
| Sample Date        | Client Info |             |            | <b>31 May 2024</b> | 17 May 2021 | ---      |
| Machine Age        | hrs         | Client Info |            | <b>47697</b>       | 43745       | ---      |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | ---      |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Changed     | ---      |
| Sample Status      |             |             |            | <b>ABNORMAL</b>    | ABNORMAL    | ---      |

| WEAR METALS |     | method      | limit/base | current    | history1 | history2 |
|-------------|-----|-------------|------------|------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >50        | <b>0</b>   | 0        | ---      |
| Chromium    | ppm | ASTM D5185m | >10        | <b>0</b>   | 0        | ---      |
| Nickel      | ppm | ASTM D5185m | >3         | <b>0</b>   | 0        | ---      |
| Titanium    | ppm | ASTM D5185m | >3         | <b>0</b>   | 0        | ---      |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>   | 0        | ---      |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>0</b>   | 0        | ---      |
| Lead        | ppm | ASTM D5185m | >10        | <b>0</b>   | 0        | ---      |
| Copper      | ppm | ASTM D5185m | >50        | <b>10</b>  | 8        | ---      |
| Tin         | ppm | ASTM D5185m | >10        | <b>0</b>   | 0        | ---      |
| Antimony    | ppm | ASTM D5185m |            | <b>---</b> | 0        | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>   | 0        | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>   | 0        | ---      |




| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 0          | <b>0</b>     | <1       | ---      |
| Barium     | ppm | ASTM D5185m | 90         | <b>0</b>     | 0        | ---      |
| Molybdenum | ppm | ASTM D5185m | 0          | <b>0</b>     | 0        | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>     | 0        | ---      |
| Magnesium  | ppm | ASTM D5185m | 100        | <b>&lt;1</b> | <1       | ---      |
| Calcium    | ppm | ASTM D5185m | 0          | <b>3</b>     | 0        | ---      |
| Phosphorus | ppm | ASTM D5185m | 0          | <b>2</b>     | 1        | ---      |
| Zinc       | ppm | ASTM D5185m | 0          | <b>&lt;1</b> | 0        | ---      |
| Sulfur     | ppm | ASTM D5185m | 23500      | <b>17274</b> | 9876     | ---      |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>&lt;1</b> | 0        | ---      |
| Sodium       | ppm | ASTM D5185m |            | <b>1</b>     | 0        | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b>     | <1       | ---      |
| Water        | %   | ASTM D6304  | >0.05      | <b>0.008</b> | 0.010    | ---      |
| ppm Water    | ppm | ASTM D6304  | >500       | <b>82</b>    | 100.9    | ---      |

| FLUID CLEANLINESS |  | method       | limit/base | current    | history1 | history2 |
|-------------------|--|--------------|------------|------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>---</b> | 1333     | ---      |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>---</b> | 441      | ---      |
| Particles >14µm   |  | ASTM D7647   | >80        | <b>---</b> | 36       | ---      |
| Particles >21µm   |  | ASTM D7647   | >20        | <b>---</b> | 13       | ---      |
| Particles >38µm   |  | ASTM D7647   | >4         | <b>---</b> | 2        | ---      |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>---</b> | 0        | ---      |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/13  | <b>---</b> | 16/12    | ---      |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 1.0        | <b>0.47</b> | 0.476    | ---      |


# OIL ANALYSIS REPORT

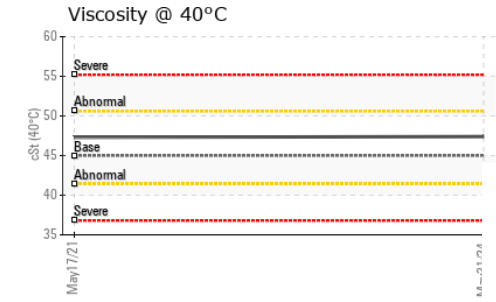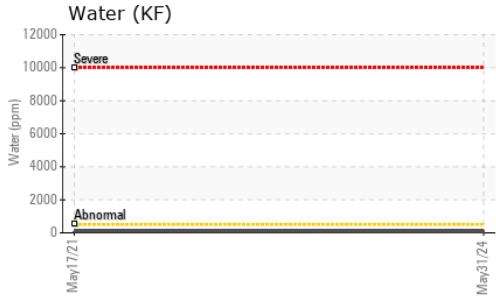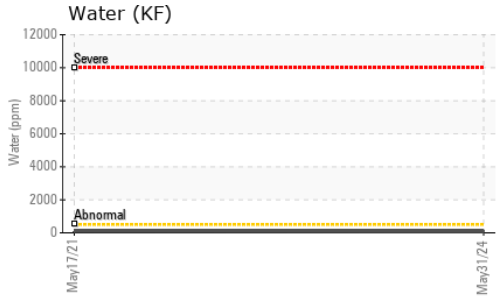





| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | ▲ MODER  | ▲ MODER  |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 45      | 47.4     | 47.3     |

**SAMPLE IMAGES**

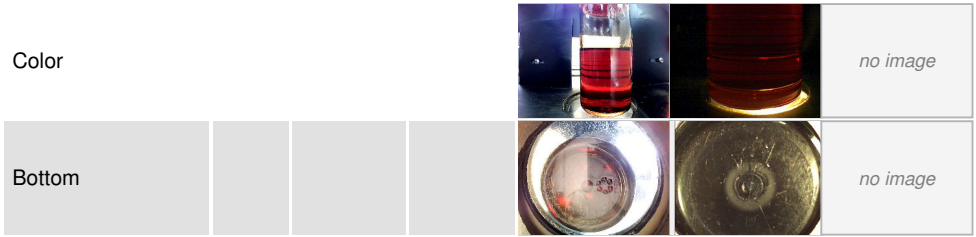

**GRAPHS**

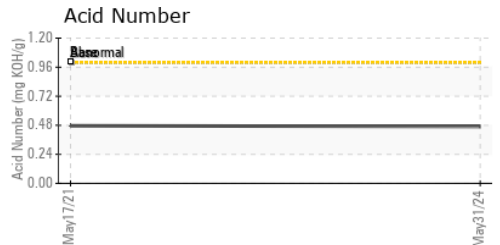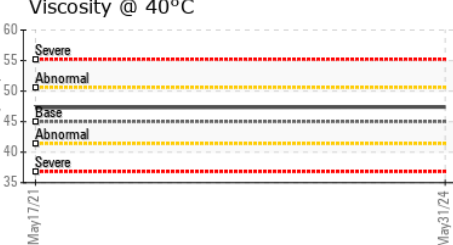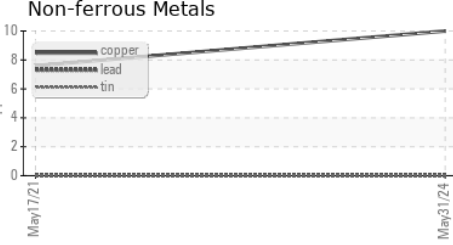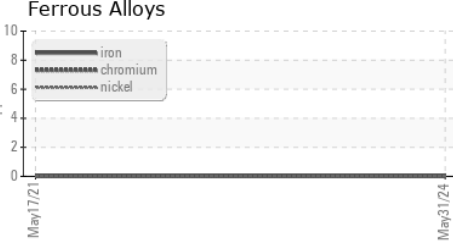

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA012376  
**Lab Number** : 06202076  
**Unique Number** : 11069537  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )  
**Received** : 06 Jun 2024  
**Tested** : 09 Jun 2024  
**Diagnosed** : 09 Jun 2024 - Don Baldrige

**BAY TECH MANUFACTURING INC**  
 23334 BERNHARDT ST  
 HAYWARD, CA  
 US 94545  
 Contact: MAREK  
 marek@baytechmfg.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)