




OIL ANALYSIS REPORT

Sample Rating Trend

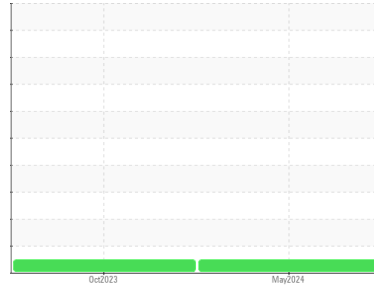

NORMAL



Machine Id

3996

Component

Diesel Engine

Fluid

CHEVRON DELO 400 XLE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0909941	WC0754184	---
Sample Date	Client Info			16 May 2024	26 Oct 2023	---
Machine Age	mls	Client Info		76224	39385	---
Oil Age	mls	Client Info		36483	39422	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	49	21	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	16	14	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	10	7	---
Tin	ppm	ASTM D5185m	>15	2	1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		14	16	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		2	2	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		767	739	---
Calcium	ppm	ASTM D5185m	2900	1468	1367	---
Phosphorus	ppm	ASTM D5185m	1100	902	723	---
Zinc	ppm	ASTM D5185m	1200	926	842	---
Sulfur	ppm	ASTM D5185m	4000	3465	2922	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	8	---
Sodium	ppm	ASTM D5185m		2	3	---
Potassium	ppm	ASTM D5185m	>20	43	44	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	12.0	10.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.7	24.3	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.7	19.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	3.8	5.3	---







OIL ANALYSIS REPORT

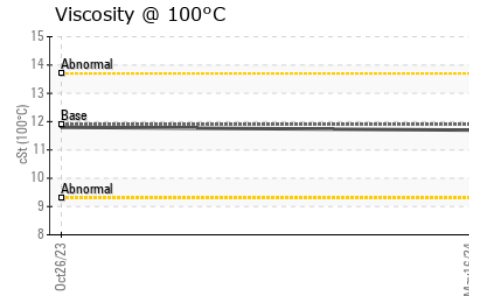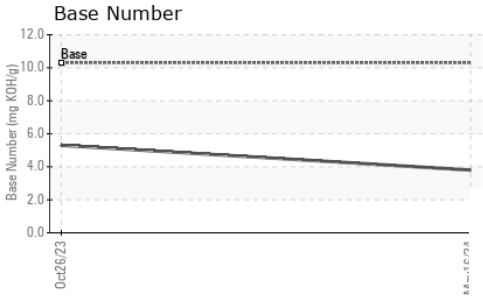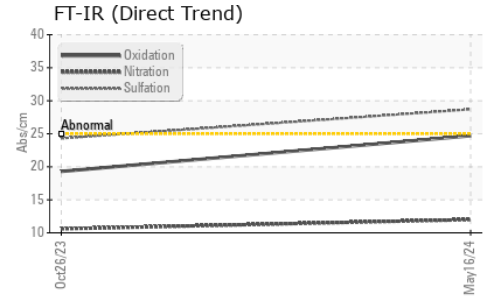

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.7	11.8

GRAPHS

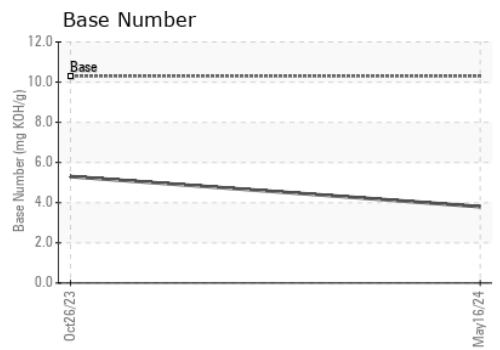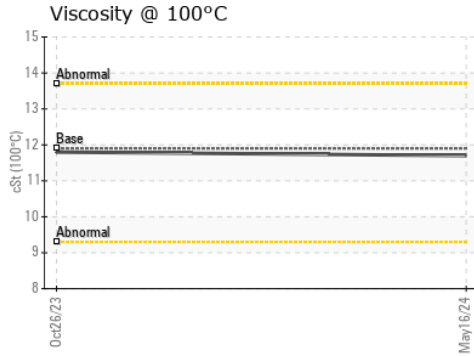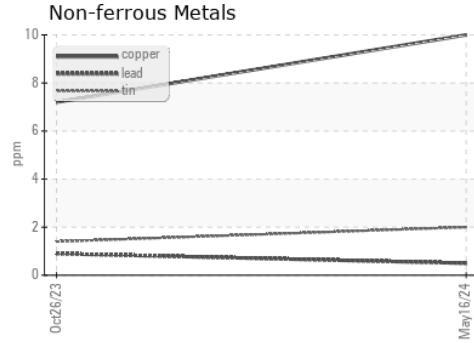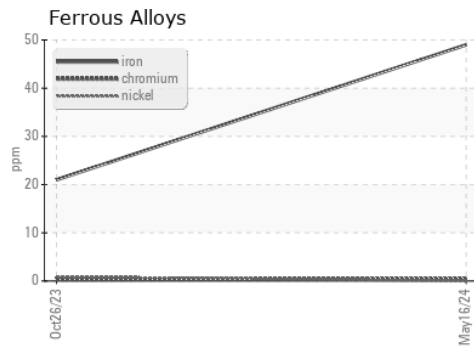

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0909941 **Received** : 06 Jun 2024
Lab Number : **06202208** **Tested** : 10 Jun 2024
Unique Number : 11069669 **Diagnosed** : 10 Jun 2024 - Wes Davis
Test Package : FLEET

LTI/MILKY WAY - SUNNYSIDE
 333 MIDVALE RD
 SUNNYSIDE, WA
 US 98944
 Contact: Barbara Kluever
 bkluever@lynden.com
 T: (509)839-5844
 F: (509)839-6556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)