


FUEL REPORT

QTS ATLANTA GA DC2 [4795] [QTS ATLANTA GA DC2] A7

Diesel Fuel

No.2 DIESEL FUEL (ULTRALOW SULPHUR)





DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

R) (9000 GAL)				May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0953906		
Sample Date		Client Info		22 May 2024		
Machine Age	hrs	Client Info		0		
Sample Status				NORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Fuel Color	text	*Visual Screen	Yllow	Red		
ASTM Color	scalar	*ASTM D1500		L4.5		
Visc @ 40°C	cSt	ASTM D445	3.0	2.34		
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	60.4		
SULFUR CONTE	VT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	0		
Sulfur (UVF)	ppm	ASTM D5453		10		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	171		
5% Distillation Point	°C	ASTM D86		192		
10% Distill Point	°C	ASTM D86	201	201		
15% Distillation Point	°C	ASTM D86		208		
20% Distill Point	°C	ASTM D86	216	215		
30% Distill Point	°C	ASTM D86	230	229		
40% Distill Point	°C	ASTM D86	243	241		
50% Distill Point	°C	ASTM D86	255	254		
60% Distill Point	°C	ASTM D86	267	268		
70% Distill Point	°C	ASTM D86	280	282		
80% Distill Point	°C	ASTM D86	295	299		
85% Distillation Point	°C	ASTM D86		310		
90% Distill Point	°C	ASTM D86	310	322		
95% Distillation Point	°C	ASTM D86		341		
Final Boiling Point	°C	ASTM D86	341	356		
IGNITION QUALIT	ГΥ	method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	37		
Cetane Index		ASTM D4737	<40.0	48		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	< 0.1	<1		
Potassium	ppm	ASTM D5185m	<0.1	2		
Water	%	ASTM D6304	< 0.05	0.001		
ppm Water	ppm	ASTM D6304	<500	13		
% Gasoline	%	*In-House	< 0.50	0.0		
9/ Pindiagal	0/	*In House	-20.0	0.0		


*In-House <20.0

0.0

% Biodiesel



FUEL REPORT

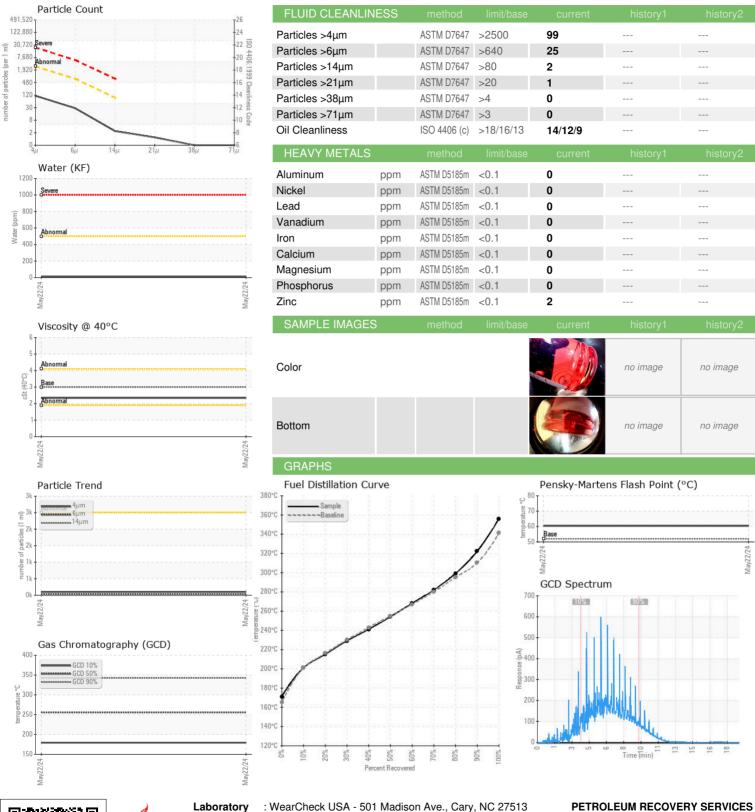





Laboratory Sample No. Lab Number

: WC0953906 : 06202364

Unique Number : 11069825

Tested Diagnosed Test Package : DF-2 (Additional Tests: Fuel, Screen)

Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

PETROLEUM RECOVERY SERVICES

210 POWELL DR SUMMERVILLE, SC US 29483

Contact: AJAY EL Ajay@prsfuel.com T: (843)225-1777

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: 07 Jun 2024

: 13 Jun 2024

: 13 Jun 2024 - Doug Bogart

Received