




OIL ANALYSIS REPORT

Sample Rating Trend

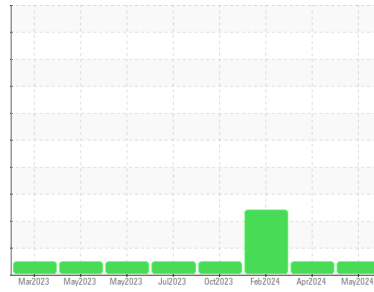

NORMAL



Machine Id
JOHN DEERE 8R310 11613 (S/N 1RW8310DENB201038)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0888091	WC0913160	WC0888081
Sample Date	Client Info	31 May 2024	02 Apr 2024	29 Feb 2024
Machine Age	hrs	5184	4560	4049
Oil Age	hrs	624	511	860
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >2.1	<1.0	<1.0	<1.0
Water	WC Method >0.21	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >51	42	34	▲ 65
Chromium	ppm ASTM D5185m >11	1	<1	2
Nickel	ppm ASTM D5185m >5	5	3	▲ 21
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >31	2	3	3
Lead	ppm ASTM D5185m >26	4	3	3
Copper	ppm ASTM D5185m >26	7	10	▲ 35
Tin	ppm ASTM D5185m >4	<1	<1	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	0	3	3
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	64	59	59
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m 450	1093	998	937
Calcium	ppm ASTM D5185m 3000	1330	1366	1167
Phosphorus	ppm ASTM D5185m 1150	1116	1141	958
Zinc	ppm ASTM D5185m 1350	1481	1427	1179
Sulfur	ppm ASTM D5185m 4250	3365	3540	2441

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >22	4	4	5
Sodium	ppm ASTM D5185m >216	<1	1	2
Potassium	ppm ASTM D5185m >20	<1	2	0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.6	0.5	0.8
Nitration	Abs/cm *ASTM D7624 >20	8.4	7.9	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	19.6	19.2	20.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.3	15.6	18.1
Base Number (BN)	mg KOH/g ASTM D2896 8.5	7.2	8.2	7.1







OIL ANALYSIS REPORT

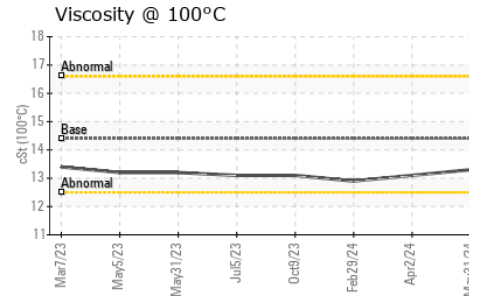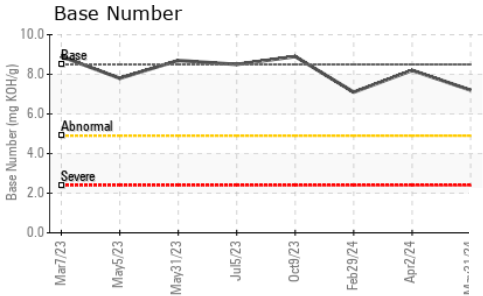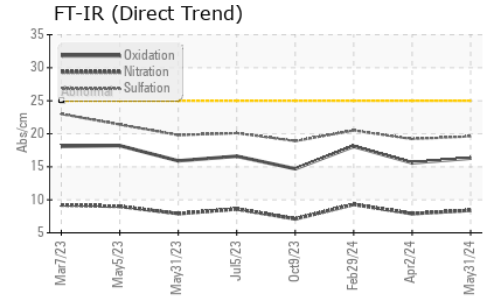

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	13.1

GRAPHS

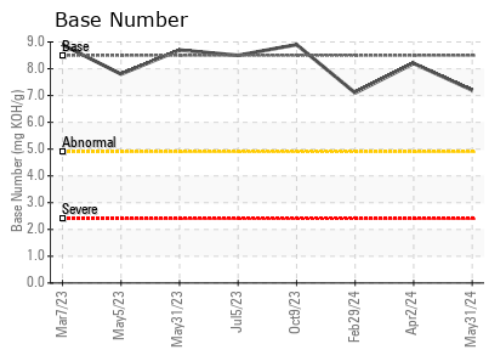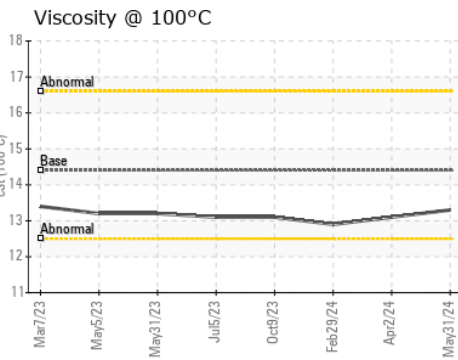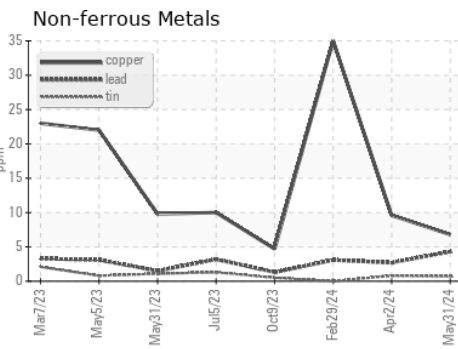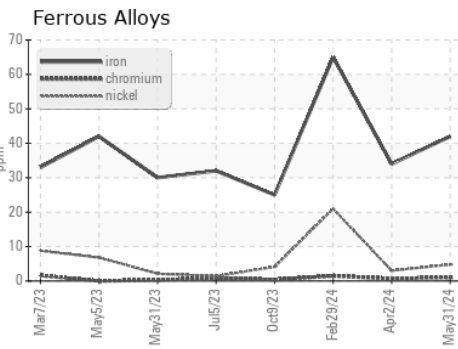

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0888091 **Received** : 07 Jun 2024
Lab Number : 06202412 **Tested** : 11 Jun 2024
Unique Number : 11069873 **Diagnosed** : 11 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mwyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)