


# **OIL ANALYSIS REPORT**



Machine Id

MACK 10077
Component
Natural Gas Engine

PETRO CANADA DURON GEO LD 15W40 (--- GAL)





### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil


## **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

	GEO ED TOTT-O (	G/12)					
Client Info   05 Jun 2024	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine Age   hrs   Client Info   423	Sample Number		Client Info		SBP0007332		
Dil Changed	Sample Date		Client Info		05 Jun 2024		
Contamped   Client Info   Changed   Changed   Companies   Contamped   Contam	Machine Age	hrs	Client Info		6520		
NORMAL     NORMAL   NORMAL   Notation   Normal   No	Oil Age	hrs	Client Info		423		
CONTAMINATION         method         limit/base         current         history1         history2           Water         WC Method         >0.1         NEG	Oil Changed		Client Info		Changed		
Water         WC Method         >0.1         NEG            WEAR METALS         method         limit/base         current         history1         history2           WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185m         >50         3             Chromium         ppm         ASTM D5185m         >4         <1	Sample Status				NORMAL		
WEAR METALS	CONTAMINATIO	N	method	limit/base	current	history1	history2
Chromium	Water		WC Method	>0.1	NEG		
Chromium	WEAR METALS		method	limit/base	current	history1	history2
Silver	ron	ppm	ASTM D5185m	>50	39		
Silver	Chromium	ppm	ASTM D5185m	>5	5		
Silver	Nickel	ppm	ASTM D5185m	>4	<1		
Silver	Fitanium		ASTM D5185m	>5	2		
December   December	Silver	ppm	ASTM D5185m	>3	0		
Copper	Aluminum	ppm	ASTM D5185m	>25	4		
STIN   DF   DF   DF   DF   DF   DF   DF   D	_ead	ppm	ASTM D5185m	>40	7		
Anadium         ppm         ASTM D5185m         0             Cadmium         ppm         ASTM D5185m         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185m         50         12             Barium         ppm         ASTM D5185m         5         4             Molybdenum         ppm         ASTM D5185m         50         22             Manganese         ppm         ASTM D5185m         50         22             Magnesium         ppm         ASTM D5185m         560         793             Phosphorus         ppm         ASTM D5185m         780         804             Phosphorus         ppm         ASTM D5185m         2040         3391             Sulfur         ppm         ASTM D5185m         2040         3391             CONTAMINANTS         method         limit/base         current         hist	Copper	ppm	ASTM D5185m	>150	2		
ADDITIVES	Γin	ppm	ASTM D5185m	>4	<1		
ADDITIVES	/anadium	ppm	ASTM D5185m		0		
Soron   ppm   ASTM D5185m   50   12	Cadmium	ppm	ASTM D5185m		0		
Sarium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum         ppm         ASTM D5185m         50         22             Manganese         ppm         ASTM D5185m         0         2             Magnesium         ppm         ASTM D5185m         560         793             Calcium         ppm         ASTM D5185m         1510         1567             Phosphorus         ppm         ASTM D5185m         780         804             Zinc         ppm         ASTM D5185m         870         973             Sulfur         ppm         ASTM D5185m         2040         3391             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         19             Potassium         ppm         ASTM D5185m         >20         21             Potassium         ppm         ASTM D5185m         >20         21             INFRA-RED         method         limit/bas	Boron	ppm	ASTM D5185m	50	12		
Manganese         ppm         ASTM D5185m         0         2             Magnesium         ppm         ASTM D5185m         560         793             Calcium         ppm         ASTM D5185m         1510         1567             Phosphorus         ppm         ASTM D5185m         780         804             Zinc         ppm         ASTM D5185m         870         973             Sulfur         ppm         ASTM D5185m         2040         3391             CONTAMINANTS         method         limit/base         current         history1         history2           Solicon         ppm         ASTM D5185m         >25         19             Godium         ppm         ASTM D5185m         >20         21             Potassium         ppm         ASTM D5185m         >20         21             Potassium         ppm         ASTM D5185m         >20         21             Potassium         ppm         ASTM D5185m <td>Barium</td> <td>ppm</td> <td>ASTM D5185m</td> <td>5</td> <th>4</th> <td></td> <td></td>	Barium	ppm	ASTM D5185m	5	4		
Magnesium         ppm         ASTM D5185m         560         793             Calcium         ppm         ASTM D5185m         1510         1567             Phosphorus         ppm         ASTM D5185m         780         804             Zinc         ppm         ASTM D5185m         870         973             Sulfur         ppm         ASTM D5185m         2040         3391             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         19             Sodium         ppm         ASTM D5185m         26             Potassium         ppm         ASTM D5185m         >20         21             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         0.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         24.9 <td>Molybdenum</td> <td>ppm</td> <td>ASTM D5185m</td> <td>50</td> <th>22</th> <td></td> <td></td>	Molybdenum	ppm	ASTM D5185m	50	22		
Calcium         ppm         ASTM D5185m         1510         1567             Phosphorus         ppm         ASTM D5185m         780         804             Zinc         ppm         ASTM D5185m         870         973             Sulfur         ppm         ASTM D5185m         2040         3391             CONTAMINANTS         method         limit/base         current         history1         history2           Soliicon         ppm         ASTM D5185m         >25         19             Potassium         ppm         ASTM D5185m         >20         21             Potassium         ppm         ASTM D5185m         >20         21             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         0.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         24.9             FLUID DEGRADATION         method         limit/base	Manganese	ppm	ASTM D5185m	0	2		
Phosphorus         ppm         ASTM D5185m         780         804             Zinc         ppm         ASTM D5185m         870         973             Sulfur         ppm         ASTM D5185m         2040         3391             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         19             Sodium         ppm         ASTM D5185m         26             Potassium         ppm         ASTM D5185m         >20         21            INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         0.1             Sulfation         Abs/cm         *ASTM D7624         >20         10.4             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         18.8 <td< td=""><td>Magnesium</td><td>ppm</td><td>ASTM D5185m</td><td>560</td><th>793</th><td></td><td></td></td<>	Magnesium	ppm	ASTM D5185m	560	793		
Solifur   ppm   ASTM D5185m   870   973	Calcium	ppm	ASTM D5185m	1510	1567		
Sulfur         ppm         ASTM D5185m         2040         3391             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         19             Sodium         ppm         ASTM D5185m         26             Potassium         ppm         ASTM D5185m         >20         21            INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         0.1             Sulfation         Abs/cm         *ASTM D7624         >20         10.4             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         18.8	Phosphorus	ppm	ASTM D5185m	780	804		
CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         19             Sodium         ppm         ASTM D5185m         26             Potassium         ppm         ASTM D5185m         >20         21            INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         0.1             Nitration         Abs/cm         *ASTM D7624         >20         10.4             Sulfation         Abs/.1mm         *ASTM D7415         >30         24.9             Dxidation         Abs/.1mm         *ASTM D7414         >25         18.8	Zinc	ppm	ASTM D5185m	870	973		
Solition   ppm   ASTM D5185m   >25   19	Sulfur	ppm	ASTM D5185m	2040	3391		
Sodium	CONTAMINANTS	;	method	limit/base	current	history1	history2
Potassium         ppm         ASTM D5185m         >20         21             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         0.1             Nitration         Abs/cm         *ASTM D7624         >20         10.4             Sulfation         Abs/.1mm         *ASTM D7415         >30         24.9             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         18.8	Silicon	ppm	ASTM D5185m	>25	19		
INFRA-RED	Sodium	ppm	ASTM D5185m		26		
Soot %         %         *ASTM D7844         0.1             Nitration         Abs/cm         *ASTM D7624         >20         10.4             Sulfation         Abs/.1mm         *ASTM D7415         >30         24.9             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         18.8	Potassium	ppm	ASTM D5185m	>20	21		
Nitration         Abs/cm         *ASTM D7624         >20         10.4             Sulfation         Abs/.1mm         *ASTM D7615         >30         24.9             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         18.8	INFRA-RED		method	limit/base	current	history1	history2
Sulfation         Abs/.1mm         *ASTM D7415         >30         24.9             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         18.8	Soot %	%	*ASTM D7844		0.1		
FLUID DEGRADATION method limit/base current history1 history2  Dxidation Abs/.1mm *ASTM D7414 >25 18.8	Nitration	Abs/cm	*ASTM D7624	>20	10.4		
Oxidation	Sulfation	Abs/.1mm	*ASTM D7415	>30	24.9		
	FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
	Oxidation	Abs/.1mm	*ASTM D7414	>25	18.8		



# **OIL ANALYSIS REPORT**

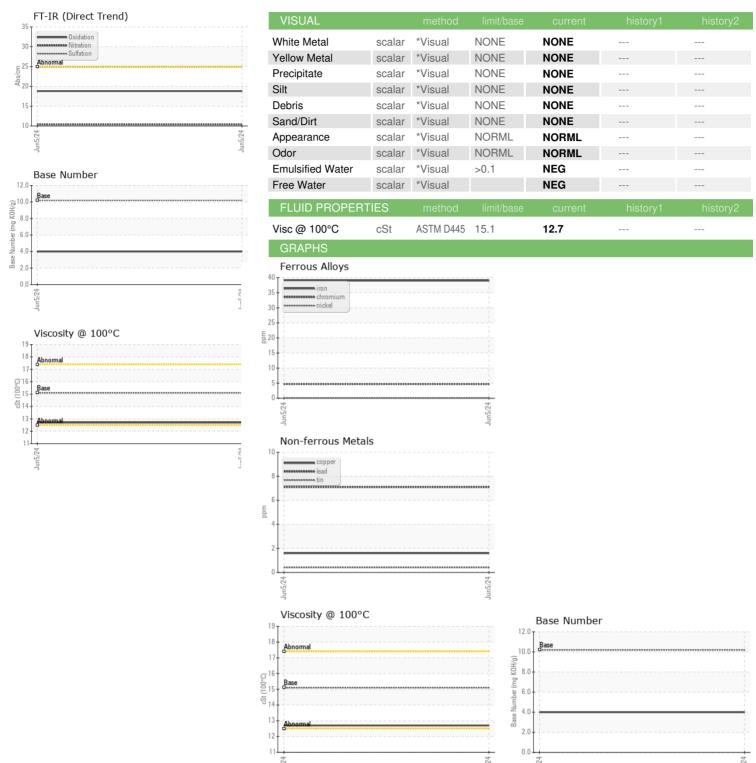





Certificate 12367

Laboratory Sample No.

**Lab Number** : 06202536

Test Package : FLEET

: SBP0007332 Unique Number : 11069997

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** 

: 07 Jun 2024 : 10 Jun 2024 Diagnosed : 10 Jun 2024 - Wes Davis

59902 N 16TH ST OMAHA, NE US 68110

FCC ENVIRONMENTAL SERVICES NEBRASKA LLC

Contact: TROY BEAN troy.bean@fccenvironmental.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: FCCOMA [WUSCAR] 06202536 (Generated: 06/10/2024 15:46:54) Rev: 1

Submitted By: TROY BEAN

T:

F: