




# OIL ANALYSIS REPORT

Sample Rating Trend

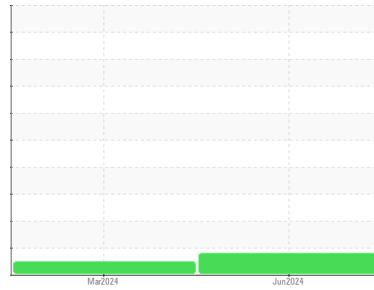

**WEAR**



Machine Id

**PRESS 23**

Component

**Hydraulic System**

Fluid

**ROYAL PURPLE SYNDRAULIC 46 (--- QTS)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The copper level is abnormal. All other component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0040170</b>	RP0037807	---
Sample Date	Client Info		<b>06 Jun 2024</b>	12 Mar 2024	---
Machine Age	hrs	Client Info	<b>0</b>	5482	---
Oil Age	hrs	Client Info	<b>6579</b>	0	---
Oil Changed		Client Info	<b>N/A</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>1</b>	0	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >20	<b>▲ 22</b>	0	---
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	<b>3</b>	1	---
Calcium	ppm	ASTM D5185m 150	<b>104</b>	52	---
Phosphorus	ppm	ASTM D5185m 670	<b>344</b>	5	---
Zinc	ppm	ASTM D5185m 800	<b>434</b>	4	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>1</b>	0	---
Sodium	ppm	ASTM D5185m	<b>0</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---
Water	%	ASTM D6304 >0.05	<b>0.00</b>	0.003	---
ppm Water	ppm	ASTM D6304 >500	<b>0</b>	34	---






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>2330</b>	2813	---
Particles >6µm	ASTM D7647	>1300	<b>540</b>	569	---
Particles >14µm	ASTM D7647	>160	<b>23</b>	44	---
Particles >21µm	ASTM D7647	>40	<b>6</b>	10	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	0	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>18/16/12</b>	19/16/13	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.51</b>	0.18	---


# OIL ANALYSIS REPORT

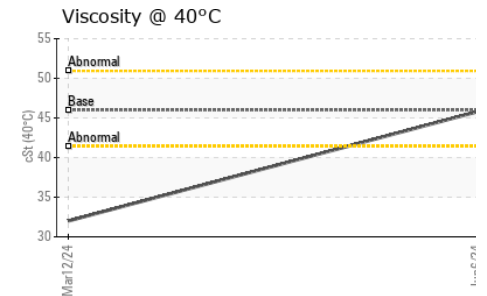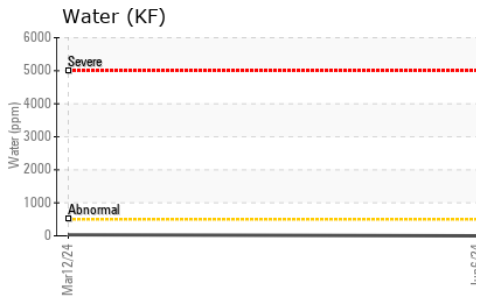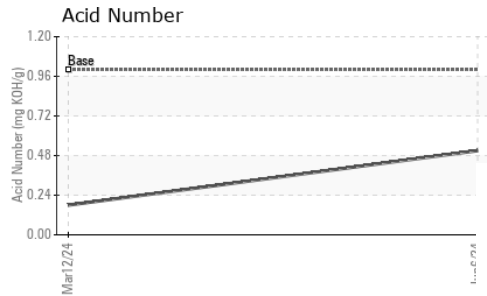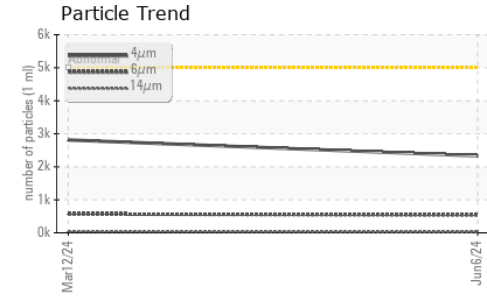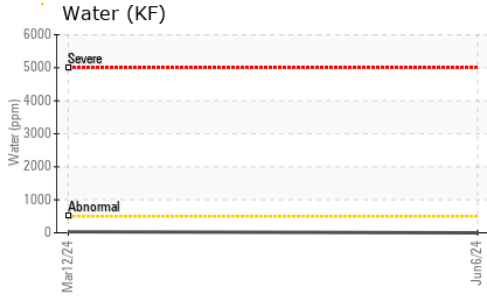






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	45.8	32.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

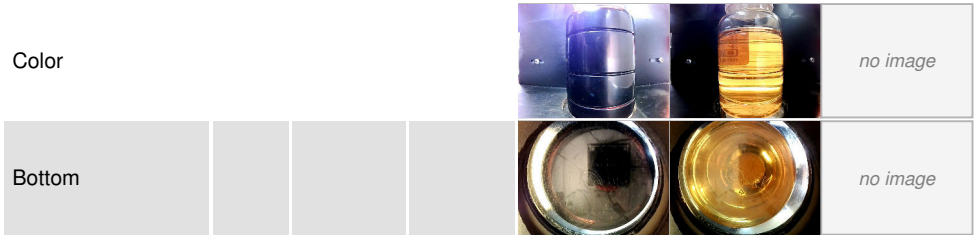

## GRAPHS

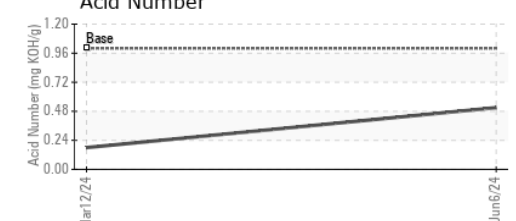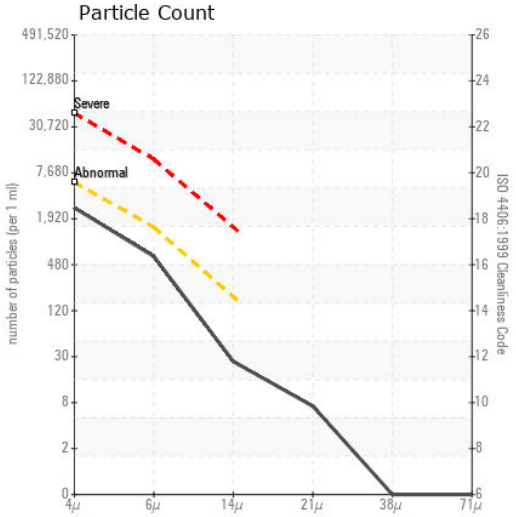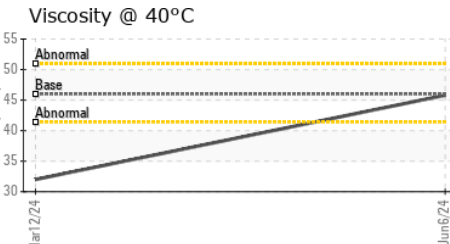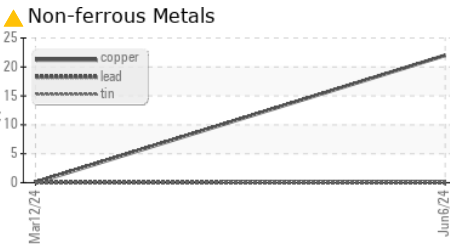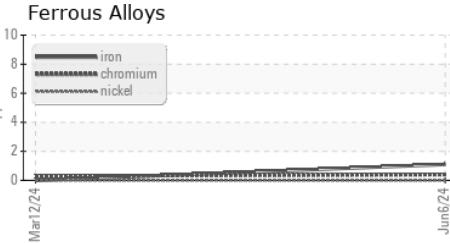

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0040170  
**Lab Number** : 06202694  
**Unique Number** : 11070155  
**Test Package** : IND 2  
**Received** : 07 Jun 2024  
**Tested** : 10 Jun 2024  
**Diagnosed** : 10 Jun 2024 - Don Baldrige

**KONG**  
 16191 TABLE MOUNTAIN PKWY  
 GOLDEN, CO  
 US 80403  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)