




# OIL ANALYSIS REPORT

Sample Rating Trend

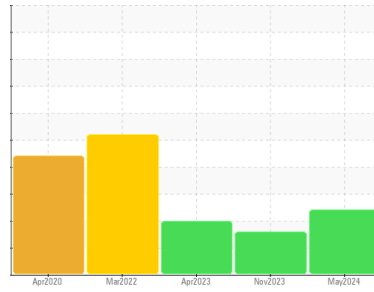

Machine Id  
**KAESER 1568653 (S/N 1051)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a high amount of particulates present in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC128590</b>	KC124374	KC101786
Sample Date	Client Info			<b>29 May 2024</b>	02 Nov 2023	17 Apr 2023
Machine Age	hrs	Client Info		<b>73584</b>	70718	68660
Oil Age	hrs	Client Info		<b>4924</b>	0	5300
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>2</b>	15	7
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	90	<b>51</b>	0	10
Calcium	ppm	ASTM D5185m	2	<b>0</b>	<1	0
Phosphorus	ppm	ASTM D5185m		<b>0</b>	2	4
Zinc	ppm	ASTM D5185m		<b>2</b>	0	0

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Sodium	ppm	ASTM D5185m		<b>9</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Water	%	ASTM D6304	>0.05	<b>0.021</b>	▲ 0.239	0.006
ppm Water	ppm	ASTM D6304	>500	<b>210</b>	▲ 2390	66.5

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>54433</b>	769	71260
Particles >6µm		ASTM D7647	>1300	▲ <b>26671</b>	75	▲ 33591
Particles >14µm		ASTM D7647	>80	▲ <b>3096</b>	5	▲ 4062
Particles >21µm		ASTM D7647	>20	▲ <b>800</b>	1	▲ 1034
Particles >38µm		ASTM D7647	>4	▲ <b>42</b>	1	▲ 32
Particles >71µm		ASTM D7647	>3	▲ <b>3</b>	0	1
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>23/22/19</b>	17/13/10	▲ 23/22/19

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.33</b>	0.29	0.29


# OIL ANALYSIS REPORT

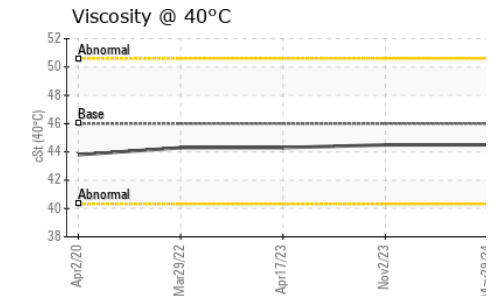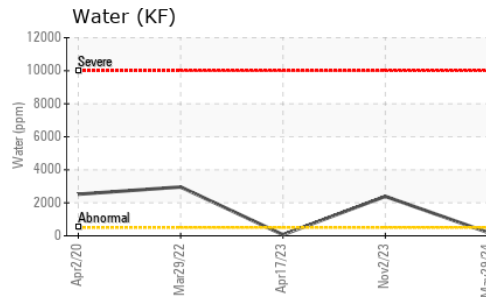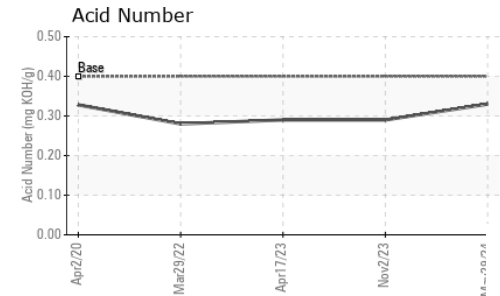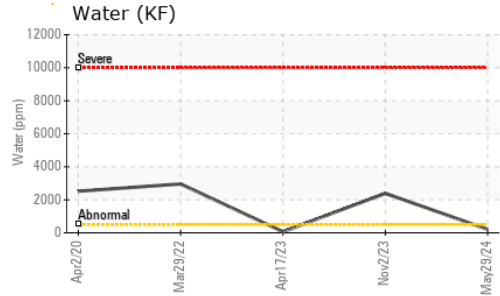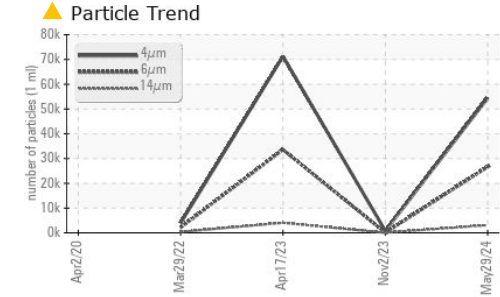





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

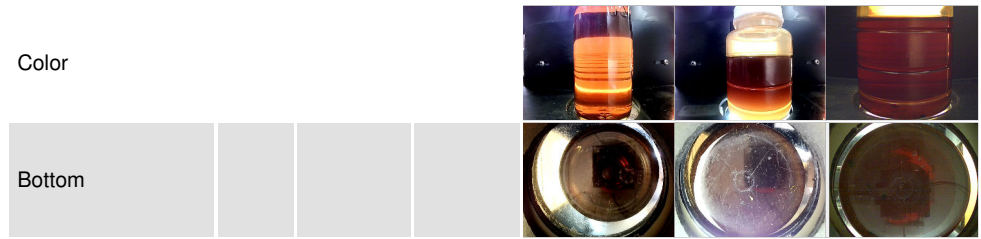

## GRAPHS

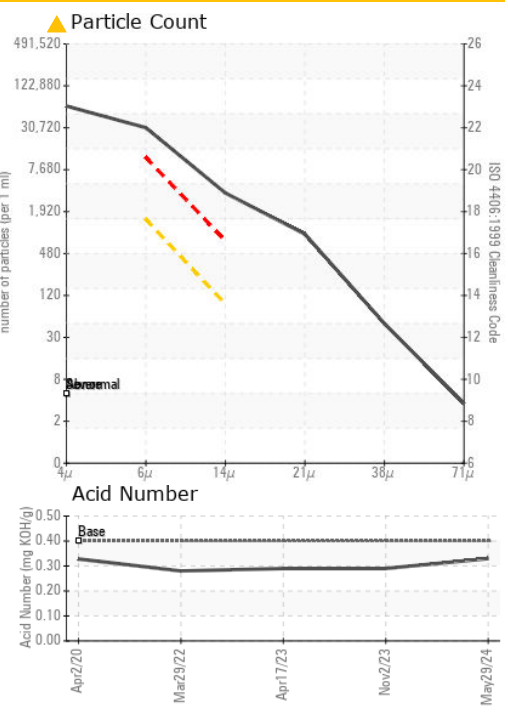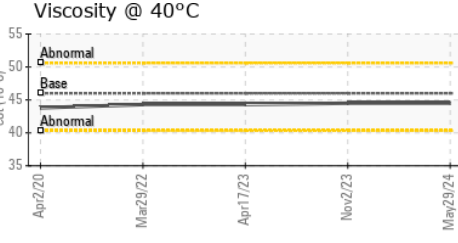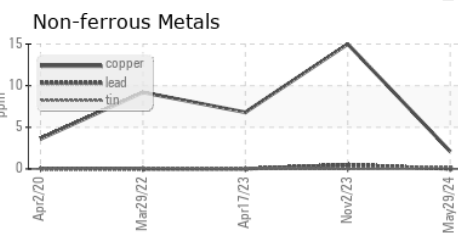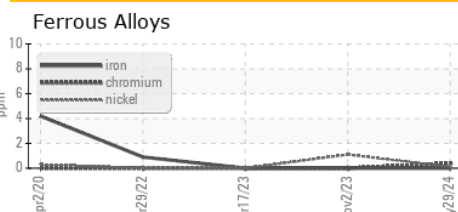

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC128590  
**Lab Number** : 06202743  
**Unique Number** : 11070204  
**Test Package** : IND 2  
**Received** : 07 Jun 2024  
**Tested** : 10 Jun 2024  
**Diagnosed** : 10 Jun 2024 - Don Baldrige

**WHEELER BROTHERS**  
 409 DRUM AVE  
 SOMERSET, PA  
 US 15501  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)