

OIL ANALYSIS REPORT

Area FAB Machine Id PRODUCTION DRIVE 24 BLUE LINE

Component Gearbox

Fluid GEAR OIL (PAG) ISO 220 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Jun2024		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP226671		
Sample Date		Client Info		06 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status				ABNORMAL		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	19		
Chromium	ppm	ASTM D5185m	>15	<1		
Nickel	ppm	ASTM D5185m	>15	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>200	0		
Tin	ppm	ASTM D5185m	>25	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
		ing a the state	live it /le e e e		histowed.	histow 0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	5	1		
Calcium	ppm	ASTM D5185m	5	0		
Phosphorus	ppm	ASTM D5185m	775	520		
Zinc	ppm	ASTM D5185m	5	0		
Sulfur	ppm	ASTM D5185m	2000	1479		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm		>20	_ <1		
Water	%	ASTM D6304		0.00		
ppm Water	ppm	ASTM D6304	>2000	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	128005		
Particles >6µm		ASTM D7647	>5000	▲ 37550		
Particles >14µm		ASTM D7647	>640	39		
Particles >21µm		ASTM D7647		5		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647 ASTM D7647	>10	1		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	A 24/22/12		
		()				
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	0.54		


ISO Jund224


Sample Rating Trend



OIL ANALYSIS REPORT

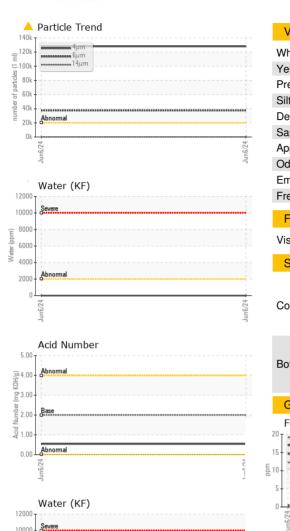

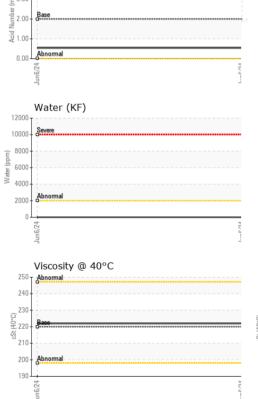

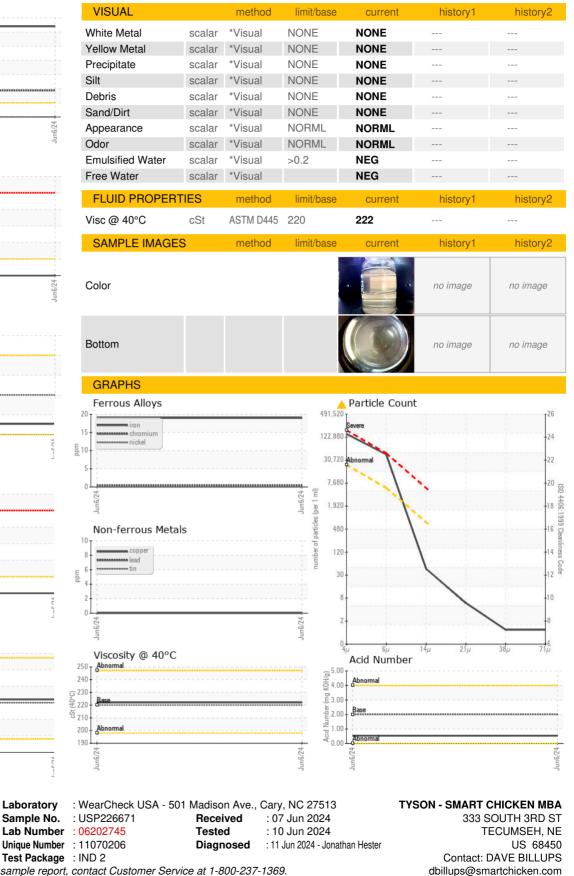

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: TYSTEC [WUSCAR] 06202745 (Generated: 06/11/2024 15:15:04) Rev: 1

Certificate 12367

Laboratory

Sample No.

Lab Number

Contact/Location: DAVE BILLUPS - TYSTEC

T: (402)786-1000

F: (402)335-2502