


OIL ANALYSIS REPORT

AGING COOLER STROETER 18 - AGING COOLER (S/N 202004-0148)

Gearbox

PETRO CANADA PURITY FG SYN GEAR ISO 220 (5 LTR)

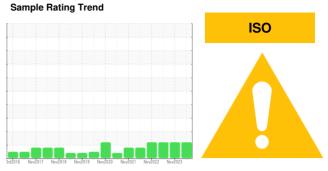

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0012479	USP0003879	USP245764
Sample Date		Client Info		28 Apr 2024	07 Nov 2023	07 May 2023
Machine Age	mths	Client Info		0	0	8
Oil Age	mths	Client Info		0	0	8
Oil Changed	111110	Client Info		N/A	N/A	Not Changd
Sample Status		Onorte milo		ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	2	9	32
Chromium	ppm	ASTM D5185m	>15	<1	<1	<1
Nickel	ppm	ASTM D5185m	>15	0	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	0	<1	0
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		0	1	0
Phosphorus	ppm	ASTM D5185m		488	446	440
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		1139	1148	1746
		method	limit/base	current	history1	history2
CONTAMINANTS)	memoa				
						_
	ppm	ASTM D5185m	>50	2	2	2
Sodium	ppm ppm	ASTM D5185m ASTM D5185m	>50	2 0	2	2 <1
Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>50 >20	2 0 0	2 0 1	2 <1 2
Sodium Potassium Water	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>50 >20 >0.2	2 0 0 0 0.001	2 0 1 0.003	2 <1 2 0.008
Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>50 >20 >0.2 >2000	2 0 0 0.001 10	2 0 1 0.003 30	2 <1 2 0.008 84.9
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>50 >20 >0.2 >2000 limit/base	2 0 0 0.001 10 current	2 0 1 0.003 30 history1	2 <1 2 0.008 84.9 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000	2 0 0 0.001 10 current \$\triangle\$ 50589	2 0 1 0.003 30 history1	2 <1 2 0.008 84.9 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000 >5000	2 0 0 0.001 10 current \$ 50589 6910	2 0 1 0.003 30 history1 • 99184 • 15678	2 <1 2 0.008 84.9 history2 172937 54349
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000 >5000 >640	2 0 0 0.001 10 current \$\triangle\$ 50589 \$\text{6910}\$	2 0 1 0.003 30 history1 • 99184 • 15678 54	2 <1 2 0.008 84.9 history2 172937 54349 38
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000 >5000 >640 >160	2 0 0 0.001 10 current \$\triangle\$ 50589 \$\text{6910}\$ 8 1	2 0 1 0.003 30 history1 ▲ 99184 ▲ 15678 54	2 <1 2 0.008 84.9 history2 ▲ 172937 ▲ 54349 38 5
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000 >5000 >640 >160 >40	2 0 0 0.001 10 current 50589 6910 8 1	2 0 1 0.003 30 history1 • 99184 • 15678 54 11	2 <1 2 0.008 84.9 history2 172937 54349 38 5 0
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000 >5000 >640 >160 >40 >10	2 0 0 0.001 10 current 50589 6910 8 1 0	2 0 1 0.003 30 history1 15678 54 11 0	2 <1 2 0.008 84.9 history2 172937 54349 38 5 0 0
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000 >5000 >640 >160 >40	2 0 0 0.001 10 current 50589 6910 8 1	2 0 1 0.003 30 history1 • 99184 • 15678 54 11	2 <1 2 0.008 84.9 history2 172937 54349 38 5 0
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness FLUID DEGRADA	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ISO 4406 (c)	>50 >20 >0.2 >2000 limit/base >20000 >5000 >640 >160 >40 >10	2 0 0 0.001 10 current 50589 6910 8 1 0	2 0 1 0.003 30 history1 15678 54 11 0	2 <1 2 0.008 84.9 history2 172937 54349 38 5 0
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647	>50 >20 >0.2 >2000 limit/base >20000 >5000 >640 >160 >40 >10 >21/19/16	2 0 0 0.001 10 current 50589 6910 8 1 0 0	2 0 1 0.003 30 history1 ▲ 99184 ▲ 15678 54 11 0 0 0 ▲ 24/21/13	2 <1 2 0.008 84.9 history2 ▲ 172937 ▲ 54349 38 5 0 0 ▲ 25/23/12





OIL ANALYSIS REPORT














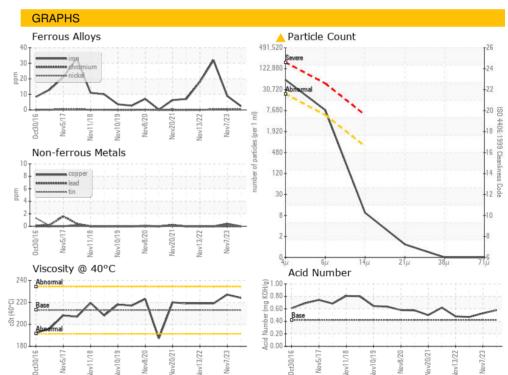





Laboratory Sample No. Lab Number

: USP0012479 : 06202789 Unique Number : 11070250 Test Package : IND 2

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 07 Jun 2024 **Tested** : 11 Jun 2024

Diagnosed : 11 Jun 2024 - Doug Bogart

Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (402)335-2502

Contact: DAVE BILLUPS dbillups@smartchicken.com T: (402)786-1000

333 SOUTH 3RD ST

TECUMSEH, NE

US 68450

TYSON - SMART CHICKEN MBA

Report Id: TYSTEC [WUSCAR] 06202789 (Generated: 06/11/2024 16:14:55) Rev: 1

Contact/Location: DAVE BILLUPS - TYSTEC