




# OIL ANALYSIS REPORT

Area  
**KANSAS/44**  
 Machine Id  
**76.35L [KANSAS^44]**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (22 GAL)**

### Sample Rating Trend

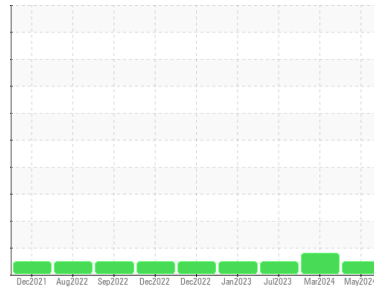

**NORMAL**

## DIAGNOSIS

### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: 2103 hours )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0925224</b>	WC0857480	WC0834124
Sample Date	Client Info		<b>29 May 2024</b>	05 Mar 2024	18 Jul 2023
Machine Age	hrs	Client Info	<b>2103</b>	2073	1682
Oil Age	hrs	Client Info	<b>1682</b>	500	1682
Oil Changed		Client Info	<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	<b>9</b>	9	12
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>5</b>	8	3
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>75	<b>4</b>	4	7
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>18</b>	19	6
Barium	ppm	ASTM D5185m		<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m		<b>1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>16</b>	17	9
Calcium	ppm	ASTM D5185m		<b>1604</b>	1727	898
Phosphorus	ppm	ASTM D5185m		<b>861</b>	879	733
Zinc	ppm	ASTM D5185m		<b>1021</b>	1084	941
Sulfur	ppm	ASTM D5185m		<b>3545</b>	3987	2515

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>11</b>	15	8
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	0
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	4	6

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>4428</b>	73897	16881
Particles >6µm	ASTM D7647	>2500	<b>142</b>	3428	1650
Particles >14µm	ASTM D7647	>640	<b>10</b>	9	72
Particles >21µm	ASTM D7647	>160	<b>4</b>	2	21
Particles >38µm	ASTM D7647	>40	<b>1</b>	0	2
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	<b>19/14/10</b>	23/19/10	21/18/13

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.14</b>	1.02	0.89




# OIL ANALYSIS REPORT

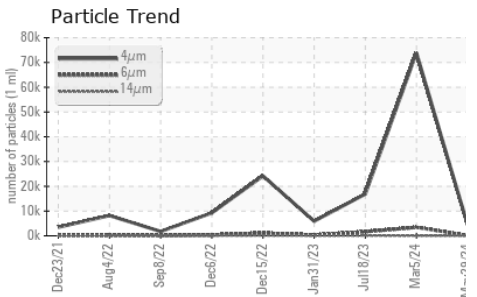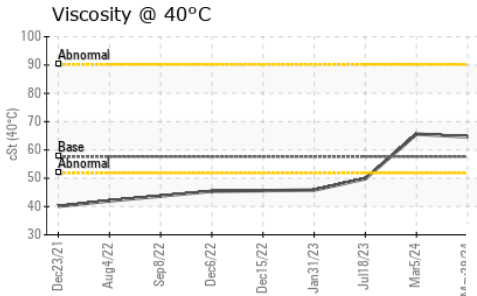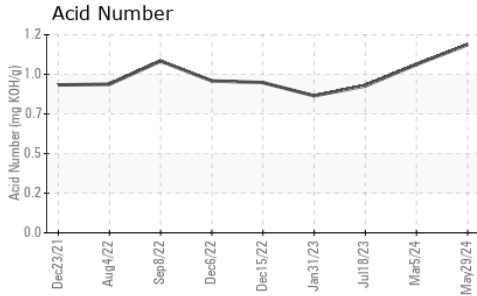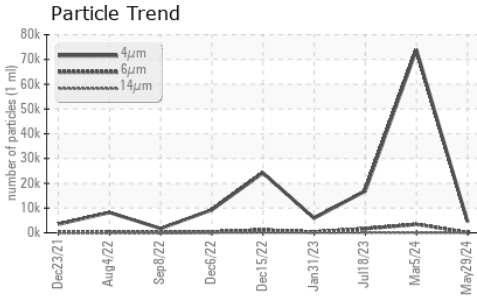






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	64.6	65.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

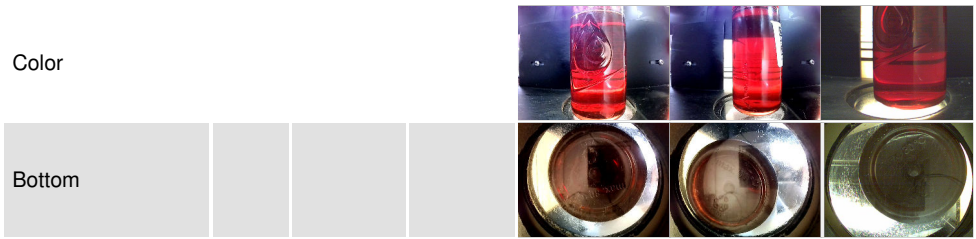

## GRAPHS

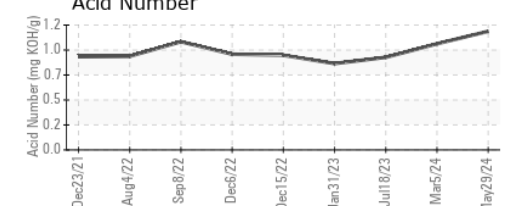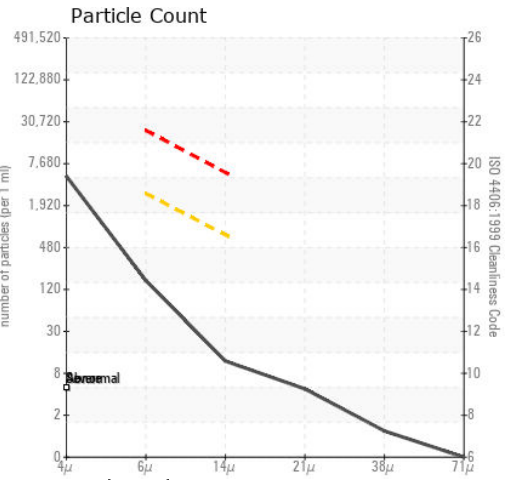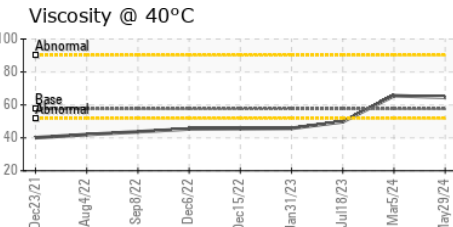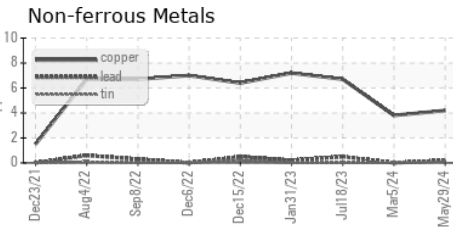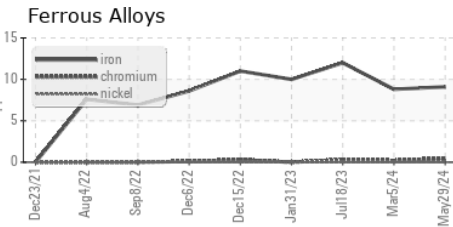

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0925224 **Received** : 07 Jun 2024  
**Lab Number** : 06203331 **Tested** : 10 Jun 2024  
**Unique Number** : 11070792 **Diagnosed** : 11 Jun 2024 - Angela Borella  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: RANDY ROBERTS  
 randy.roberts@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)