




OIL ANALYSIS REPORT

Sample Rating Trend

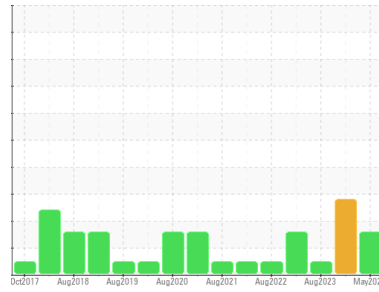

Machine Id
MCI/OS/GJ-7302A

Component
Blower
Fluid
ROYAL PURPLE SYNFILM GT 100 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0932109	WC0695234	WC0695232
Sample Date	Client Info		23 May 2024	16 Aug 2023	16 Aug 2023
Machine Age	mths	Client Info	0	58	78
Oil Age	mths	Client Info	87	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	▲ 48	1
Chromium	ppm	ASTM D5185m >20	<1	<1	0
Nickel	ppm	ASTM D5185m >20	0	<1	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	<1	0
Lead	ppm	ASTM D5185m >20	18	4	15
Copper	ppm	ASTM D5185m >20	18	2	18
Tin	ppm	ASTM D5185m >20	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	<1	● 21	2
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	0
Magnesium	ppm	ASTM D5185m 90	19	57	15
Calcium	ppm	ASTM D5185m	0	● 90	<1
Phosphorus	ppm	ASTM D5185m 35	11	25	9
Zinc	ppm	ASTM D5185m	2	8	3
Sulfur	ppm	ASTM D5185m 18000	18111	19974	19427

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	▲ 27	9	13
Sodium	ppm	ASTM D5185m	0	2	0
Potassium	ppm	ASTM D5185m >20	1	<1	<1
Water	%	ASTM D6304	NEG	NEG	NEG


FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	384	▲ 17278	1369
Particles >6µm	ASTM D7647	>640	96	▲ 2406	272
Particles >14µm	ASTM D7647	>80	5	66	22
Particles >21µm	ASTM D7647	>20	1	13	4
Particles >38µm	ASTM D7647	>4	0	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	16/14/10	▲ 21/18/13	18/15/12


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.388	0.49	0.47	0.53


▲ Silicon (ppm)

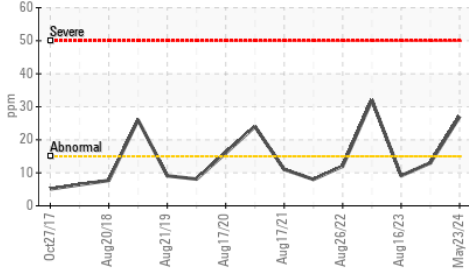


Viscosity @ 100°C

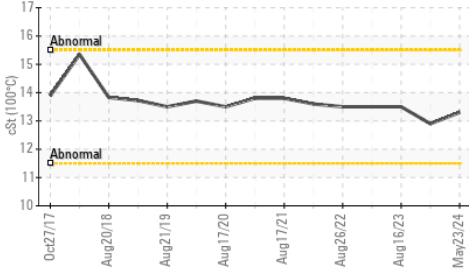


Particle Trend

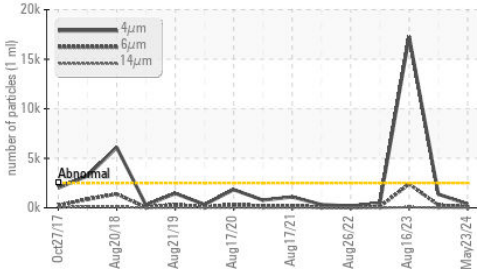

Viscosity @ 100°C

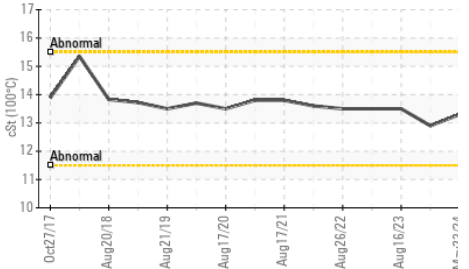


Viscosity @ 40°C

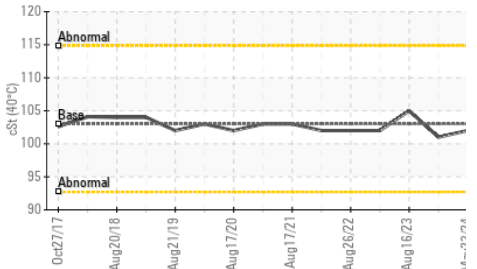

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	103	101	105
Visc @ 100°C	cSt	ASTM D445	13.3	12.9	13.5
Viscosity Index (VI)	Scale	ASTM D2270	128	123	127

SAMPLE IMAGES

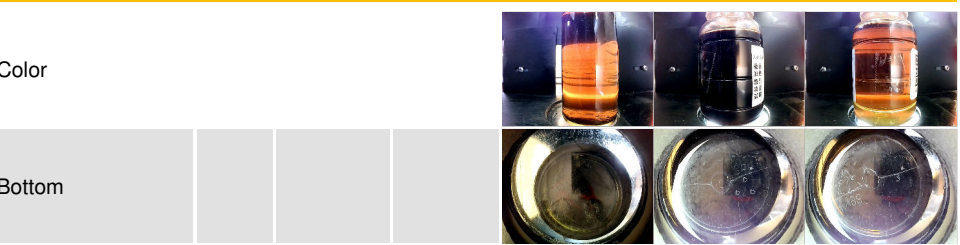


GRAPHS


Ferrous Alloys

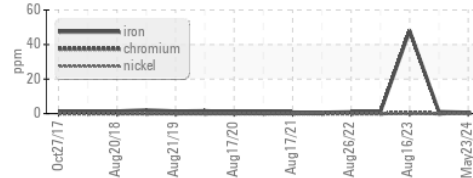


Non-ferrous Metals

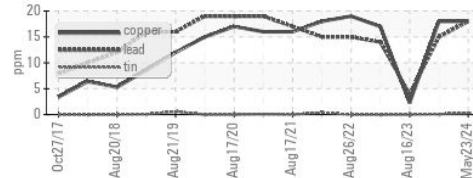


Viscosity @ 40°C

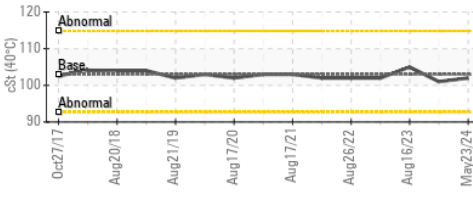

Particle Count

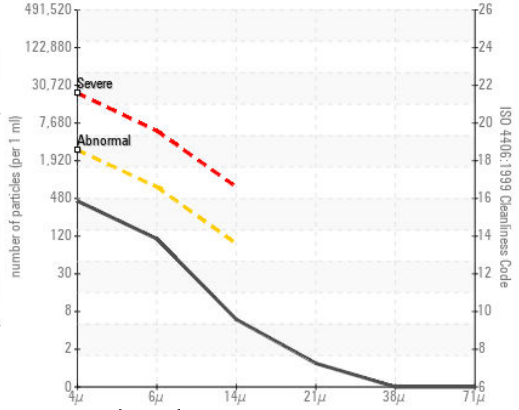

Acid Number

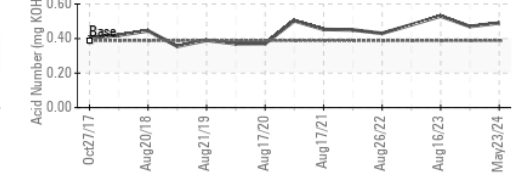

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0932109 **Received** : 07 Jun 2024
Lab Number : 06203356 **Tested** : 11 Jun 2024
Unique Number : 11070817 **Diagnosed** : 11 Jun 2024 - Angela Borella
Test Package : PLANT (Additional Tests: KV100, VI)

J/POWER-BD

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: KENTO OKUHARA
Mitsuo_Miyahara@jpower.co.jp

JP

T:

F: x: