




OIL ANALYSIS REPORT

Sample Rating Trend

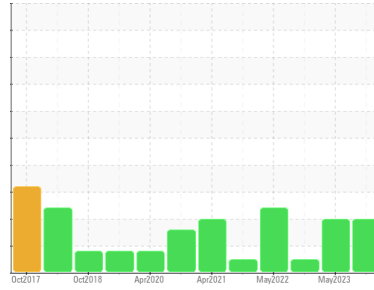

WEAR



Machine Id
MCI/OS/GJ-7502A

Component
Blower

Fluid
ROYAL PURPLE THERMYL-GLYDE 100 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0932111	WC0807297	WC0583604
Sample Date	Client Info		23 May 2024	10 May 2023	26 Aug 2022
Machine Age	mths	Client Info	0	55	0
Oil Age	mths	Client Info	67	0	46
Oil Changed	Client Info		N/A	N/A	Not Changd
Sample Status			ABNORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	▲ 44	▲ 38	2
Chromium	ppm	ASTM D5185m >20	<1	<1	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >20	2	0	<1
Lead	ppm	ASTM D5185m >20	2	0	0
Copper	ppm	ASTM D5185m >20	3	1	16
Tin	ppm	ASTM D5185m >20	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	11	22	0
Molybdenum	ppm	ASTM D5185m	<1	0	<1
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m	39	64	0
Calcium	ppm	ASTM D5185m	41	114	0
Phosphorus	ppm	ASTM D5185m	26	25	52
Zinc	ppm	ASTM D5185m	8	0	0
Sulfur	ppm	ASTM D5185m	20394	23084	19491

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	12	6	5
Sodium	ppm	ASTM D5185m	0	3	0
Potassium	ppm	ASTM D5185m >20	1	0	0
Water	%	ASTM D6304	NEG	NEG	NEG

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	▲ 7749	▲ 16549	1983
Particles >6µm	ASTM D7647	>640	▲ 1580	▲ 1564	132
Particles >14µm	ASTM D7647	>80	49	70	5
Particles >21µm	ASTM D7647	>20	6	18	1
Particles >38µm	ASTM D7647	>4	0	1	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 20/18/13	▲ 21/18/13	18/14/10


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.47	0.39	0.29




OIL ANALYSIS REPORT


▲ Particle Trend

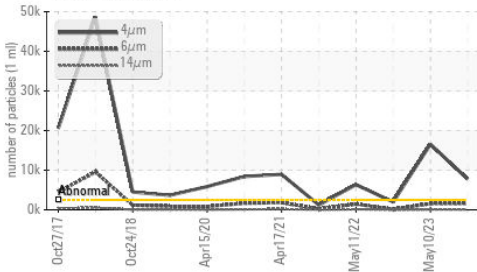


Viscosity @ 100°C

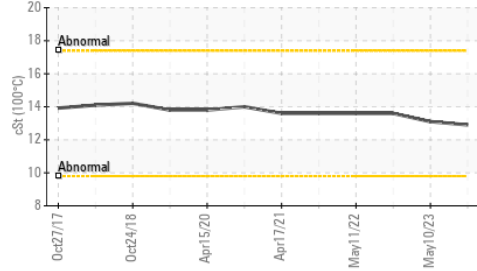


▲ Ferrous Alloys

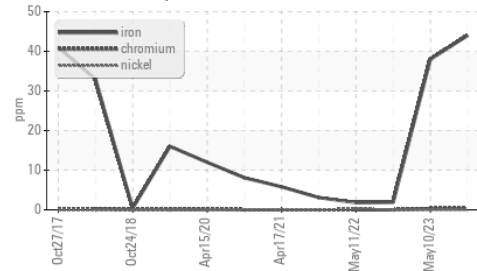

Acid Number

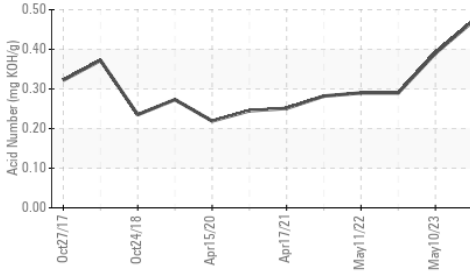


Viscosity @ 100°C

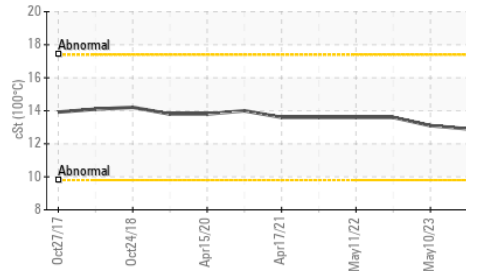

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	97.5	103	102
Visc @ 100°C	cSt	ASTM D445	12.9	13.1	13.6
Viscosity Index (VI)	Scale	ASTM D2270	128	123	133

SAMPLE IMAGES

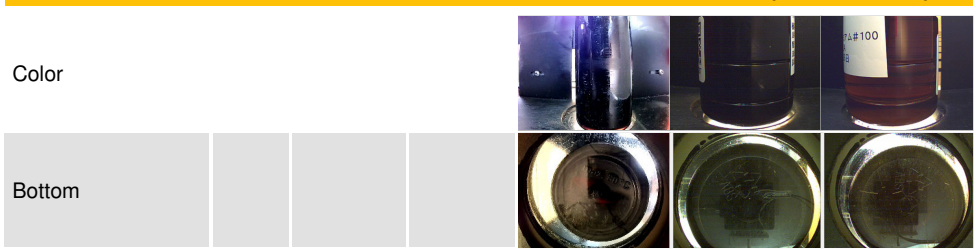


GRAPHS


▲ Ferrous Alloys

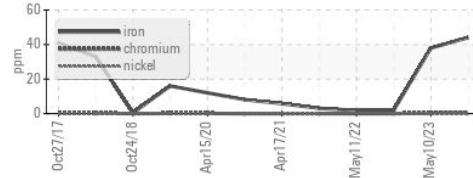


Non-ferrous Metals

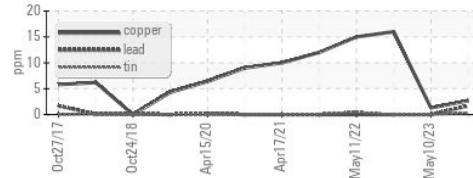


Viscosity @ 40°C

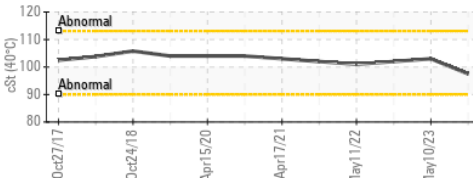

▲ Particle Count

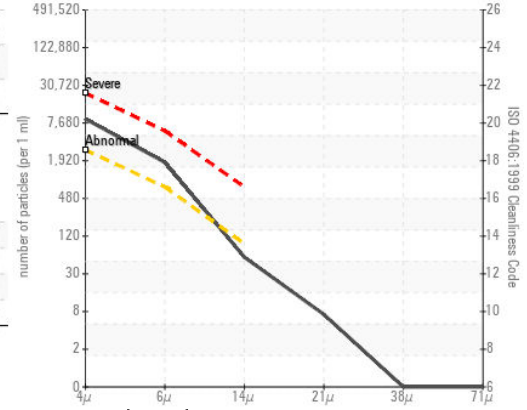

Acid Number

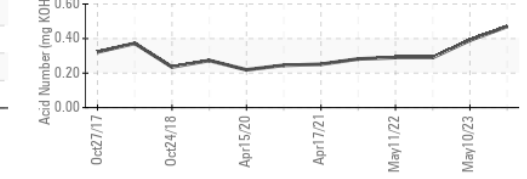

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0932111 **Received** : 07 Jun 2024
Lab Number : 06203358 **Tested** : 11 Jun 2024
Unique Number : 11070819 **Diagnosed** : 11 Jun 2024 - Angela Borella
Test Package : PLANT (Additional Tests: KV100, VI)

J/POWER-BD

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: KENTO OKUHARA
Mitsuo_Miyahara@jpower.co.jp

JP

T:

F: x: