

# **OIL ANALYSIS REPORT**

## Sample Rating Trend







AMADA 16701 Component Hydraulic System

Fluid {not provided} (--- GAL)

#### DIAGNOSIS

Machine Id

## Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

## Contamination

There is no indication of any contamination in the oil.

### **Fluid Condition**

Viscosity of sample indicates oil is within ISO 32 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

				Apr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
		Client Info		WC06203360		
Sample Number Sample Date		Client Info		12 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1115	Client Info		N/A		
Sample Status		Ciletit IIIIO		NORMAL		
CONTAMINATIC	201	mathad	limit/base			
Water	VIN	method WC Method	>0.1	current	history1	history2
WEAR METALS		method	limit/base	current		history2
					history1	
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>75	<1		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	1-1-					
	mag	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		3		
Calcium Phosphorus	ppm	ASTM D5185m		92		
Phosphorus	ppm	ASTM D5185m ASTM D5185m		92 233		
	ppm	ASTM D5185m		92		
Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	92 233 94		
Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method		92 233 94 790 current		
Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	limit/base	92 233 94 790 current	   history1	   history2
Phosphorus Zinc Sulfur CONTAMINANT	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	>20	92 233 94 790 current	   history1	history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>20	92 233 94 790 current <1	   history1	  history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20	92 233 94 790 current <1 0	   history1 	  history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLI	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20 limit/base	92 233 94 790 current <1 0 1	  history1   history1	history2 history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIE Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  Method ASTM D5185m	>20 >20 limit/base >5000	92 233 94 790 current <1 0 1 current 387	  history1   history1	history2 history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIE Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647	>20 >20 limit/base >5000 >1300	92 233 94 790 current <1 0 1 current 387 70 4	history1 history1	history2 history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLI Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	>20 	92 233 94 790 current <1 0 1 current 387 70	history1 history1	history2 history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLI Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647	>20 	92 233 94 790 current <1 0 1 current 387 70 4	history1 history1	history2 history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLI Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 	92 233 94 790 current <1 0 1 current 387 70 4 2 0	history1 history1	history2 history2
Phosphorus Zinc Sulfur  CONTAMINANTS Silicon Sodium Potassium  FLUID CLEANLIS Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm ppm ss ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m  Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20	92 233 94 790 current <1 0 1 current 387 70 4 2 0 0	history1 history1	history2 history2

Acid Number (AN)


mg KOH/g ASTM D8045

19 -

Contact/Location: JOHN STEED - MOMATL



## **OIL ANALYSIS REPORT**

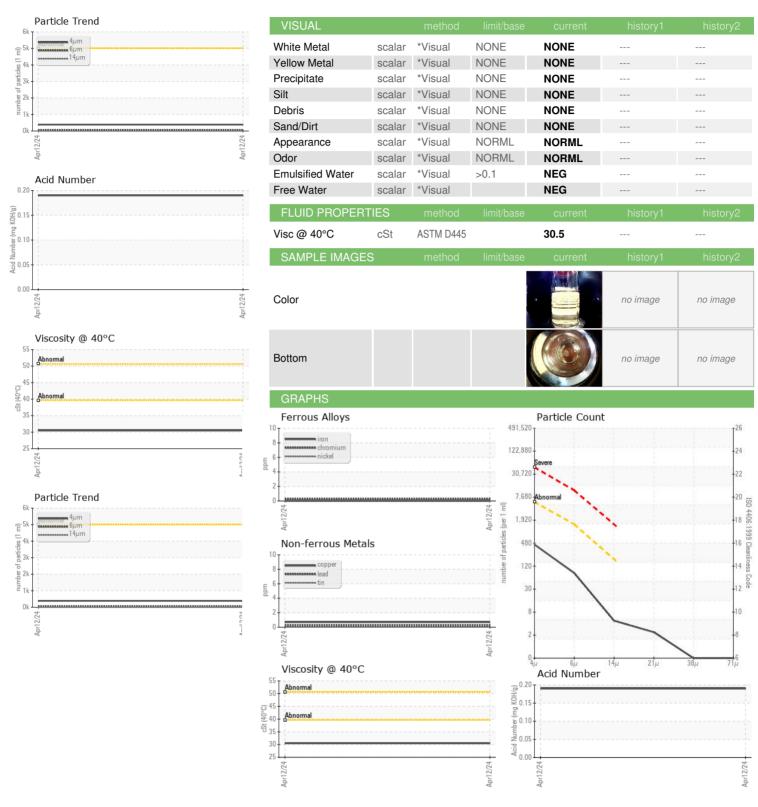



Certificate 12367

Laboratory Sample No.

Test Package : MOB 2

: WC06203360 Lab Number : 06203360 Unique Number : 11070821

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 07 Jun 2024 **Tested** : 10 Jun 2024 Diagnosed

: 11 Jun 2024 - Angela Borella

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: JOHN STEED - MOMATL

**MOMAR Incorporated** 

Contact: JOHN STEED

john.steed@momar.com T: (404)355-4580

P.O. Box 19567

F: (678)894-4204

Atlanta, GA US 30325