

# **OIL ANALYSIS REPORT**



Machine Id 20FP003

Component Hydraulic System

**AW HYDRAULIC OIL ISO 46 (--- GAL)** 

## **DIAGNOSIS**

### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.


### Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

				Mar2024		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
	IATION		IIIIIIVDase		Tilstory	HISTOTYZ
Sample Number		Client Info		WC0871234		
Sample Date		Client Info		24 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2		
Chromium	ppm	ASTM D5185m	>20	6		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	1		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25	13		
Calcium	ppm	ASTM D5185m	200	38		
Phosphorus	ppm	ASTM D5185m	300	340		
Zinc	ppm	ASTM D5185m	370	445		
Sulfur	ppm	ASTM D5185m	2500	935		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304		0.00		
ppm Water	ppm	ASTM D6304	>500	0		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>▲</b> 8947		
Particles >6µm		ASTM D7647	>1300	<u>^</u> 2811		
Particles >14µm		ASTM D7647	>160	<u> </u>		
Particles >21µm		ASTM D7647	>40	26		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>^</u> 20/19/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.32		
	9	. 10 1111 000-70	3.07	0.02		



## **OIL ANALYSIS REPORT**

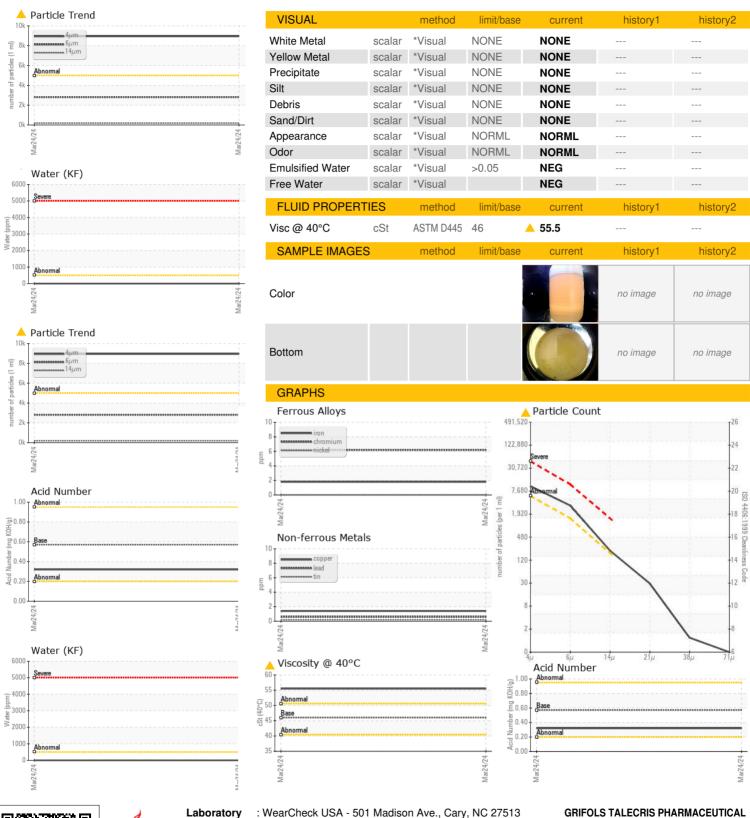



Certificate 12367

Laboratory Sample No.

: WC0871234 Lab Number : 06203383 Unique Number : 11070844

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 07 Jun 2024 **Tested** : 10 Jun 2024

: 11 Jun 2024 - Angela Borella

Diagnosed Test Package : IND 2 ( Additional Tests: KF )

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: TALCLA [WUSCAR] 06203383 (Generated: 06/11/2024 18:47:03) Rev: 1

Contact/Location: KEN TERRY - TALCLA

8368 US 70 WEST

Contact: KEN TERRY

kenneth.terry@grifols.com

CLAYTON, NC

T: (919)359-4362

F: (919)359-4767

US 27520