

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER AS 25 8774588 (S/N 1731)

Component Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- QTS)

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.


Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018342	KCP48005D	
Sample Date		Client Info		13 May 2024	18 Aug 2023	
Machine Age	hrs	Client Info		4259	1057	
Oil Age	hrs	Client Info		0	1057	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ATTENTION	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	2	<1	
Lead	ppm	ASTM D5185m	>10	- <1	0	
Copper	ppm	ASTM D5185m		2	2	
Tin	ppm	ASTM D5185m	>10	- <1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	30	69	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	85	88	
Calcium	ppm	ASTM D5185m	0	0	3	
Phosphorus	ppm	ASTM D5185m	0	5	2	
Zinc	ppm	ASTM D5185m	0	4	0	
Sulfur	ppm	ASTM D5185m	23500	21271	22253	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		12	14	
Potassium	ppm	ASTM D5185m	>20	8	6	
Water	%	ASTM D6304	>0.05	0.027	0.022	
ppm Water	ppm	ASTM D6304	>500	278	221.3	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8501	3114	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	
Particles >14µm		ASTM D7647	>80	44	73	
Particles >21µm		ASTM D7647	>20	9	7	
Particles >38µm		ASTM D7647	>4	1	0	
Particles >71µm		ASTM D7647	>3	0	0	
		100 4400 (a)	>/17/13	20/18/13	9/18/13	
Oil Cleanliness		ISO 4406 (c)	>/1//10	20/10/13	10/10/10	
Oil Cleanliness FLUID DEGRADA	TION	method	limit/base	current	history1	history2

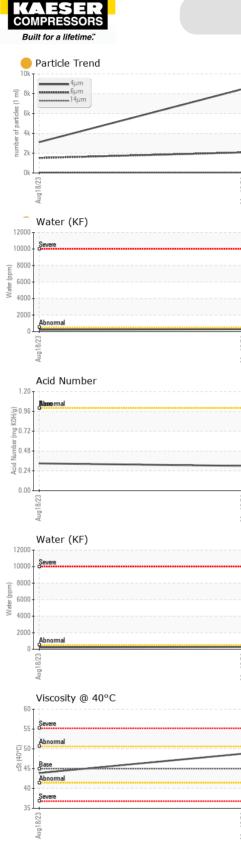

OIL ANALYSIS REPORT

	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
	Precipitate	scalar	*Visual	NONE	NONE	NONE	
	Silt	scalar	*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
3/24	Appearance	scalar	*Visual	NORML	NORML	NORML	
May13/24	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
	Free Water	scalar	*Visual		NEG	NEG	
	FLUID PROPER			limit/base		history1	history?
	Visc @ 40°C	cSt	method ASTM D445	45	current	43.9	history2
	SAMPLE IMAGE	S	method	limit/base	current	history1	history2
May13/24 -	Color						no image
	Bottom						no image
	GRAPHS						
	Ferrous Alloys				Particle Count	:	1.22
	10 iron			491,520			T ²⁶
5	chromium			122,880			-24
C C				20.720			
. μ.	2			30,720			-22
				7,680	~ `		-20
				3/24	1		
	Aug 18/23			May13/24 s (per 1 ml			-18
	Non-ferrous Meta	ls		- sajo 12 480			16
	¹⁰ T			of bai			
	8 - copper			May 170 4505 [ml] 4505 [ml	`	1	+20 +18 +16 +14 +12
	E 6			2 30		1	12
	4-						
5	2-			8	Seven emal		-10
. L	0			5Z 2			-8
-	Aug 18/23			May13/2			
				₩ 0 ₄		14µ 21µ	38µ 71µ
	Viscosity @ 40°C				Acid Number	2007-001 501-029 7 -2005	
	55 Severe			(B ^{1.20}	Base rmal		
				Q 0.96			
	() 50 - Base Abnormal Base			(b)HO() 0.96 (b)HO() 0.96 (c) 0.72 (c)			
	40 -			N 10 24			
	35 Severe			9.00 Percent			
5	Aug 18/23				Aug18/23		
5.01	Aug1			May13/24	Aug		
Laboratory Sample No. Lab Number Unique Number	: 11070854	Rece Teste Diagr	ived : 07 ed : 11 nosed : 11	7, NC 27513 7 Jun 2024 1 Jun 2024 Jun 2024 - Ange	la Borella	5202 E BEN	STAR FOOD I WHITE BLVI AUSTIN, T US 7874
	: IND 2 (Additional Test contact Customer Serv					Contact: Se	ervice Manage

.

Contact/Location: Service Manager - LONAUS Page 2 of 2