




OIL ANALYSIS REPORT

Sample Rating Trend

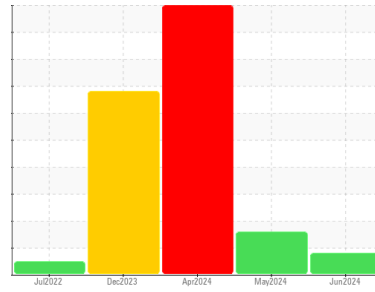

WEAR



Machine Id
040-R0006

Component
Left Final Drive

Fluid
SCHAEFFER SCHAEFFER 293 MOLY 75W90 (2 QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: 7156 hrs Left final drive sample)

Wear

Gear wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0868296	WC0903921	WC0903845
Sample Date	Client Info		03 Jun 2024	11 May 2024	19 Apr 2024
Machine Age	hrs	Client Info	7156	7039	6945
Oil Age	hrs	Client Info	6156	4	6631
Oil Changed	Client Info		Not Chngd	Changed	Changed
Sample Status			ABNORMAL	ABNORMAL	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	▲ 596	▲ 1495	▲ 3824
Chromium	ppm	ASTM D5185m >10	5	▲ 16	▲ 36
Nickel	ppm	ASTM D5185m >10	0	1	1
Titanium	ppm	ASTM D5185m	0	1	2
Silver	ppm	ASTM D5185m	0	1	0
Aluminum	ppm	ASTM D5185m >25	2	8	● 22
Lead	ppm	ASTM D5185m >25	0	<1	0
Copper	ppm	ASTM D5185m >50	2	5	9
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	19	36	73
Barium	ppm	ASTM D5185m	2	2	10
Molybdenum	ppm	ASTM D5185m	204	214	0
Manganese	ppm	ASTM D5185m	4	11	26
Magnesium	ppm	ASTM D5185m	7	8	16
Calcium	ppm	ASTM D5185m	87	81	218
Phosphorus	ppm	ASTM D5185m	507	984	1284
Zinc	ppm	ASTM D5185m	56	87	93
Sulfur	ppm	ASTM D5185m	13492	23143	29166

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	8	28	▲ 93
Sodium	ppm	ASTM D5185m	2	10	28
Potassium	ppm	ASTM D5185m >20	<1	14	36

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	MODER	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT

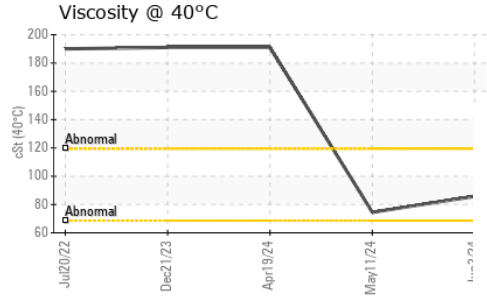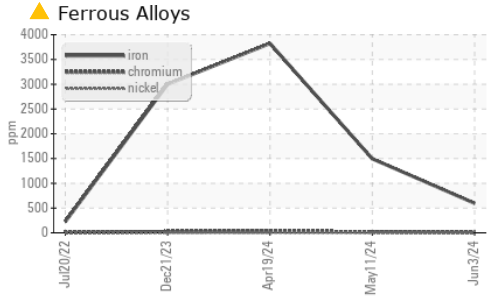




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	85.8	74.5	191

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

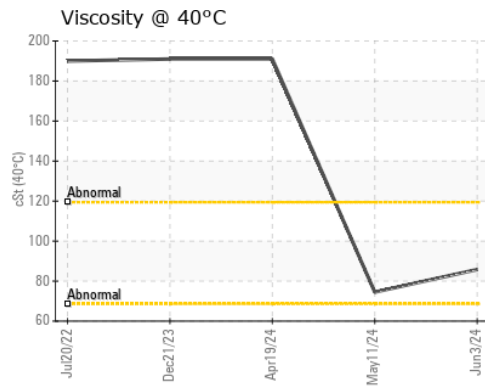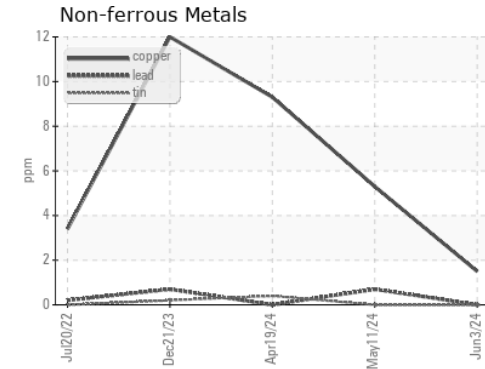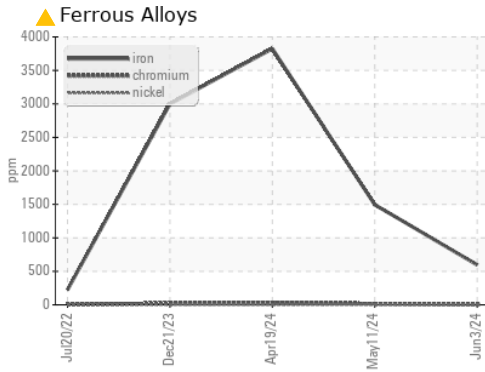

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868296 **Received** : 07 Jun 2024
Lab Number : **06203703** **Tested** : 10 Jun 2024
Unique Number : 11071164 **Diagnosed** : 12 Jun 2024 - Jonathan Hester
Test Package : CONST

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: