




# OIL ANALYSIS REPORT

Sample Rating Trend

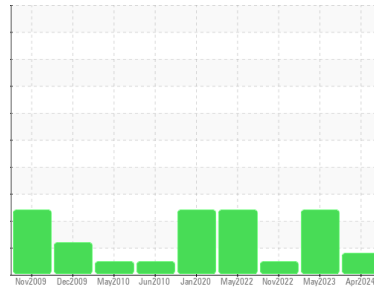

FUEL



Machine Id  
**FREIGHTLINER 710**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (17 QTS)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0932838</b>	WC0821258	WC0761125
Sample Date	Client Info		<b>25 Apr 2024</b>	26 May 2023	15 Nov 2022
Machine Age	mls	Client Info	<b>289368</b>	274304	264002
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>MARGINAL</b>	SEVERE	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	<b>31</b>	23	6
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>14</b>	2	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>27</b>	38	35
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>102</b>	44	73
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>128</b>	407	43
Calcium	ppm	ASTM D5185m	3000	<b>2343</b>	1714	1963
Phosphorus	ppm	ASTM D5185m	1150	<b>968</b>	718	916
Zinc	ppm	ASTM D5185m	1350	<b>1274</b>	867	1132
Sulfur	ppm	ASTM D5185m	4250	<b>3895</b>	2782	3647

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	18	4
Sodium	ppm	ASTM D5185m	>158	<b>3</b>	35	2
Potassium	ppm	ASTM D5185m	>20	<b>18</b>	29	<1
Fuel	%	ASTM D3524	>3.0	<b>▲ 2.9</b>	▲ 9.9	<1.0

## INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0.7</b>	1.8	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.2</b>	10.1	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	25.0	18.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.9</b>	21.7	13.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.6</b>	9.2	7.1











# OIL ANALYSIS REPORT

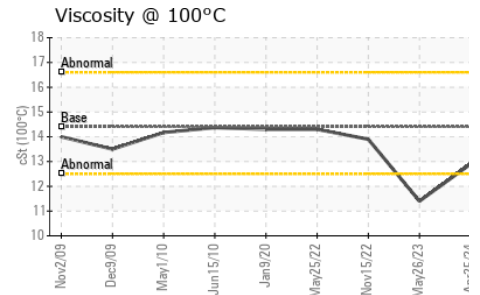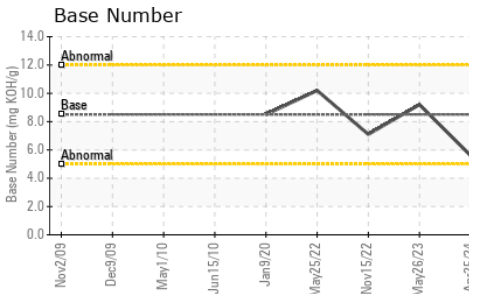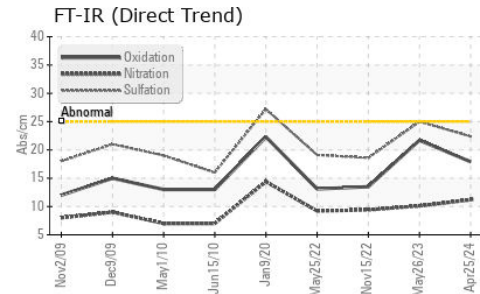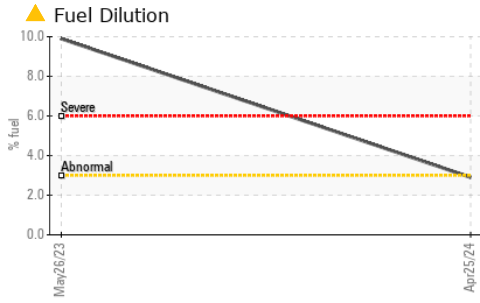

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.9	▲ 11.4	13.9

## GRAPHS

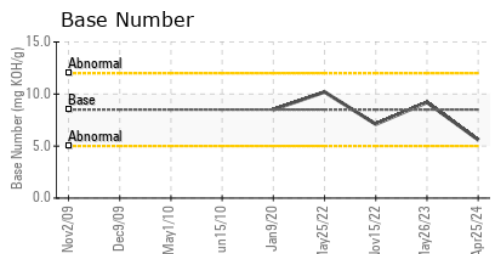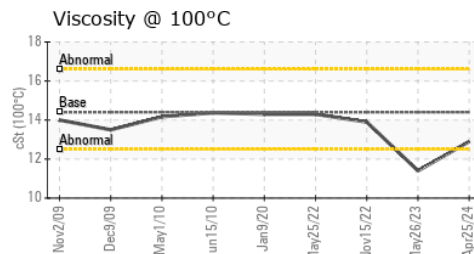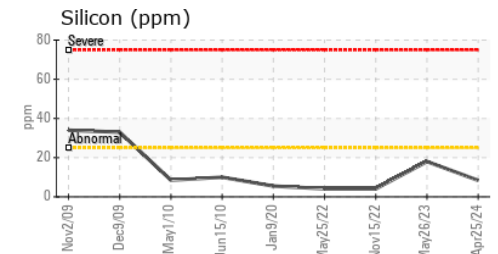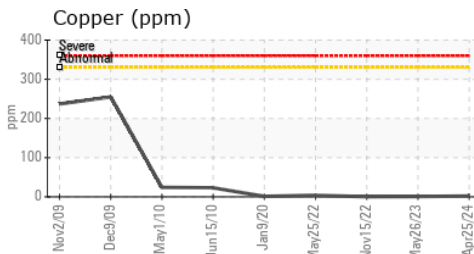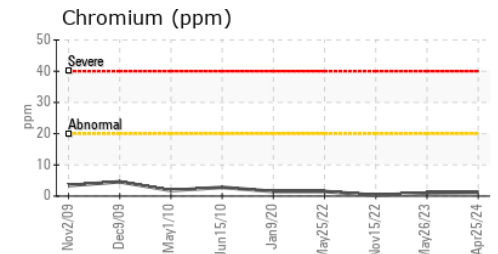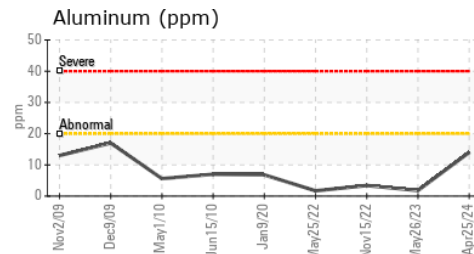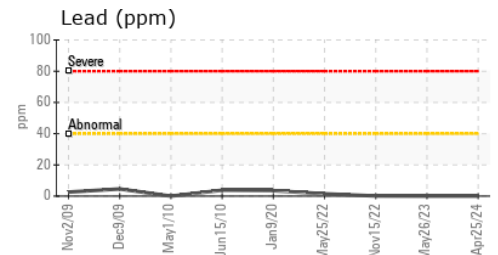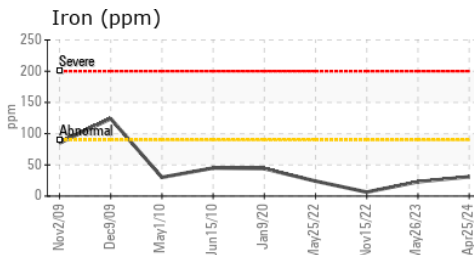

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0932838  
**Lab Number** : 06203865  
**Unique Number** : 11071326  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel, TBN )

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: DEVIN WEBER

dweber@wcpss.net

T: (919)856-8076

F: x: