


## **FUEL REPORT**

## [QTS ATLANTA GA DC1] GA9

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for

ULSD specification.

Diesel Fuel

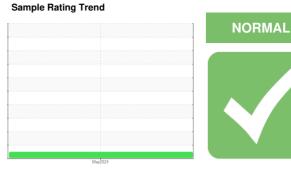

## QTS ATLANTA GA DC1 [4640]

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (3500 GAL)								
DIAGNOSIS	SAMPLE INFORM	MATION	method	limit/base	current	h	is	
Recommendation	Sample Number		Client Info		WC0953961			
All laboratory tests indicate that this sample meets	Sample Date		Client Info		22 May 2024			
ASTM D975 specifications for No.2 ultra-low-sulfur	Machine Age	hrs	Client Info		0			
diesel fuel.	Sample Status				NORMAL			
Corrosion All metal levels are normal indicating no corrosion	PHYSICAL PROP	PERTIES	method	limit/base	current	h	is	
in the system.	Fuel Color	text	*Visual Screen	Yllow	Red			
Contaminants	ASTM Color	scalar	*ASTM D1500		L4.5			
There is no bacteria or fungus (yeast and/or mold)	Visc @ 40°C	cSt	ASTM D445	3.0	2.42			
indicated in the sample. The water content is	Pensky-Martens Flash Point	°C	*PMCC Calculated	52	60.6			
negligible. The amount and size of particulates present in the system are acceptable. There is no	SULFUR CONTE	NT	method	limit/base	current	h	is	


indicated in the sample. The water content is	Pensky-Martens Flash Point	°C	*PMCC Calculated	52	60.6	
negligible. The amount and size of particulates						
present in the system are acceptable. There is no	SULFUR CONTENT		method			
indication of any contamination in the fuel.	Sulfur	ppm	ASTM D5185m	10	0	
Fuel Condition	O . 16 (LIV/E)		AOTAA DE 4EO		_	

Sulfur (UVF)	ppm	ASTM D5453		7		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	171		
5% Distillation Point	°C	ASTM D86		193		
10% Distill Point	°C	ASTM D86	201	203		
15% Distillation Point	°C	ASTM D86		210		
20% Distill Point	°C	ASTM D86	216	218		
30% Distill Point	°C	ASTM D86	230	233		
40% Distill Point	°C	ASTM D86	243	246		
50% Distill Point	°C	ASTM D86	255	259		
60% Distill Point	°C	ASTM D86	267	274		
70% Distill Point	°C	ASTM D86	280	288		
80% Distill Point	°C	ASTM D86	295	303		
85% Distillation Point	°C	ASTM D86		315		
90% Distill Point	°C	ASTM D86	310	326		
95% Distillation Point	°C	ASTM D86		345		
Final Boiling Point	°C	ASTM D86	341	359		
IGNITION OLIALIT	rv	method	limit/hase	current	history1	history2

Final Boiling Point	°C	ASTM D86	341	359		
IGNITION QUALI	TY	method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	37		
Cetane Index		ASTM D4737	<40.0	48		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<1		
Sodium	ppm	ASTM D5185m	<0.1	1		
Potassium	ppm	ASTM D5185m	< 0.1	1		
Water	%	ASTM D6304	< 0.05	0.00		
ppm Water	ppm	ASTM D6304	<500	0		
% Gasoline	%	*In-House	< 0.50	0.0		
% Biodiesel	%	*In-House	<20.0	0.0		



## **FUEL REPORT**

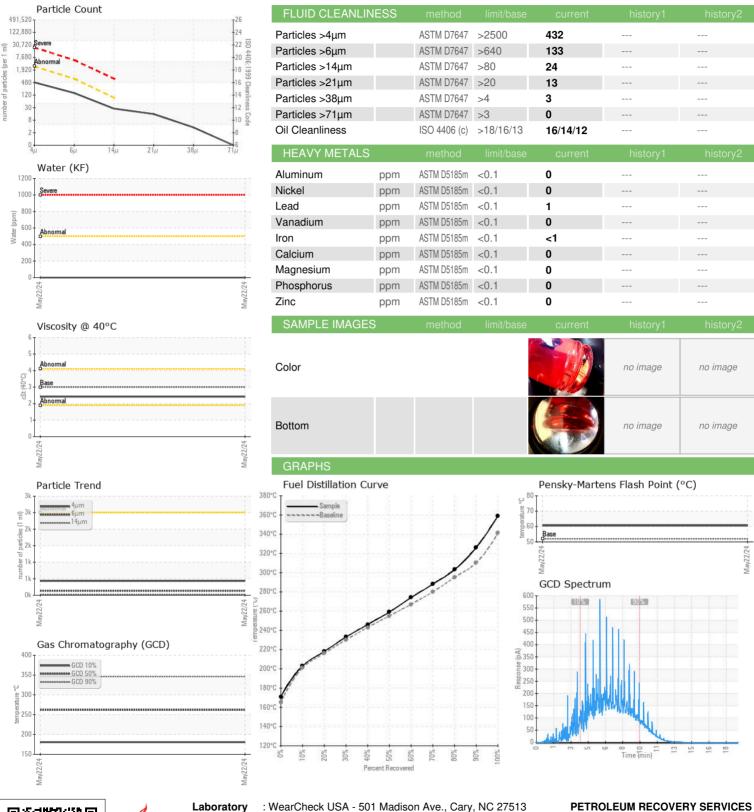





Certificate 12367

Sample No.

Lab Number : 06204086

: WC0953961

Received Tested Unique Number : 11071547 Diagnosed

: 17 Jun 2024

: 17 Jun 2024 - Elizabeth Valachovic

: 07 Jun 2024

Test Package : DF-2 (Additional Tests: Fuel, Screen) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) SUMMERVILLE, SC US 29483 Contact: AJAY EL Ajay@prsfuel.com

210 POWELL DR

T: (843)225-1777

Report Id: PETSUM [WUSCAR] 06204086 (Generated: 06/17/2024 11:32:02) Rev: 1

Contact/Location: AJAY EL - PETSUM