




# OIL ANALYSIS REPORT

## Sample Rating Trend

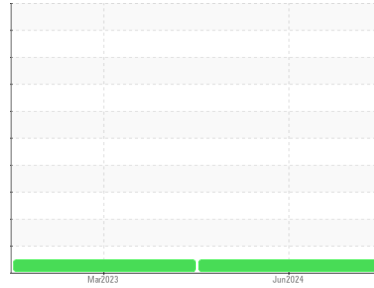

**NORMAL**



Machine Id  
**265**  
 Component  
**Diesel Engine**  
 Fluid  
**PRIMROSE 790 Syn-O-Gen 8 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0925561</b>	WC0584561	---
Sample Date	Client Info			<b>06 Jun 2024</b>	30 Mar 2023	---
Machine Age	mls	Client Info		<b>385466</b>	341825	---
Oil Age	mls	Client Info		<b>30000</b>	40015	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	<b>37</b>	37	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	4	---
Lead	ppm	ASTM D5185m	>40	<b>21</b>	24	---
Copper	ppm	ASTM D5185m	>330	<b>4</b>	10	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>52</b>	56	---
Barium	ppm	ASTM D5185m		<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m		<b>94</b>	74	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>406</b>	354	---
Calcium	ppm	ASTM D5185m		<b>1721</b>	1789	---
Phosphorus	ppm	ASTM D5185m		<b>1191</b>	1118	---
Zinc	ppm	ASTM D5185m		<b>1463</b>	1347	---
Sulfur	ppm	ASTM D5185m		<b>3909</b>	3319	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>15</b>	15	---
Sodium	ppm	ASTM D5185m		<b>1</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	5	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>0.8</b>	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.6</b>	11.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>31.4</b>	30.5	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>27.0</b>	26.0	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.8</b>	5.1	---







# OIL ANALYSIS REPORT

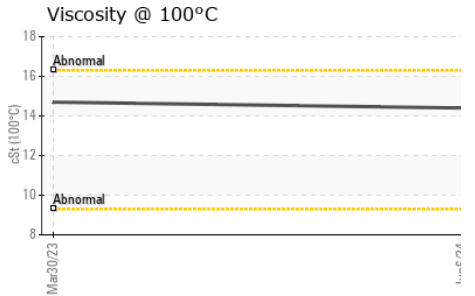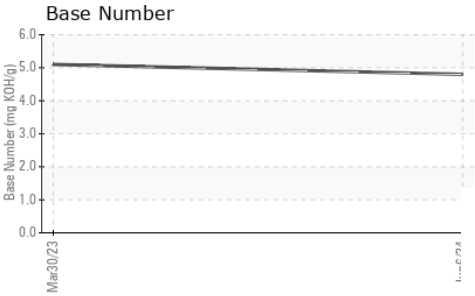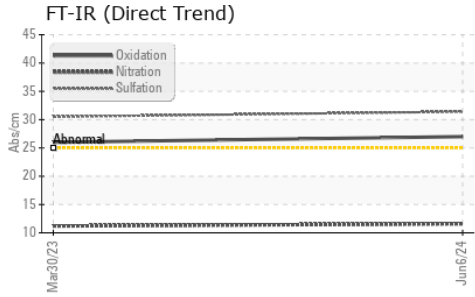

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.7	---

### GRAPHS

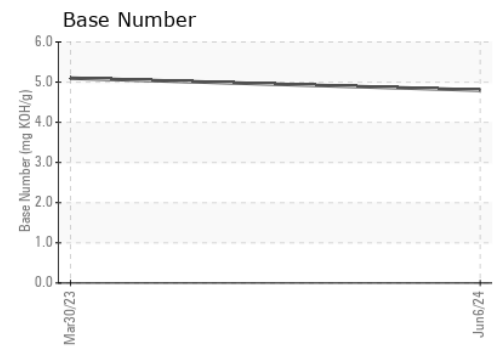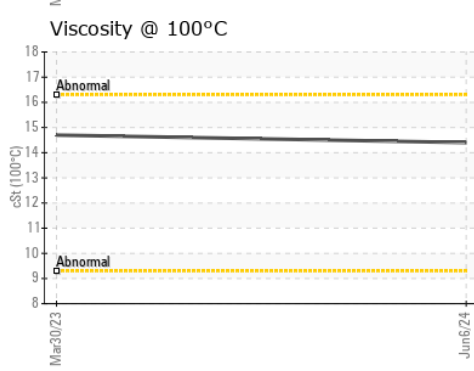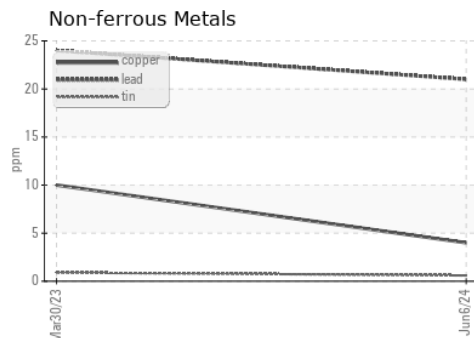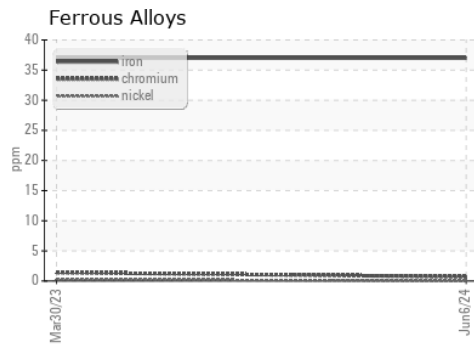

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0925561      **Received** : 10 Jun 2024  
**Lab Number** : 06204345      **Tested** : 11 Jun 2024  
**Unique Number** : 11071806      **Diagnosed** : 12 Jun 2024 - Sean Felton  
**Test Package** : FLEET

**MIDDLESBORO COCA-COLA BOTTLING - MCCB**  
 1324 E CUMBERLAND AVE  
 MIDDLESBORO, KY  
 US 40965  
 Contact: TIM GOINS  
 tgoins@mccbw.com  
 T: (606)248-0362  
 F: (606)248-1382

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)