




OIL ANALYSIS REPORT

Sample Rating Trend

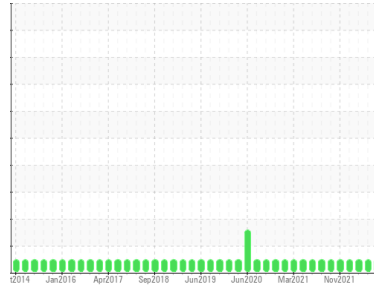

NORMAL



Area
OKLAHOMA/102
 Machine Id
09.13W [OKLAHOMA^102]
 Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0918037	WC0686964	WC0670291
Sample Date	Client Info	30 May 2024	20 May 2022	28 Mar 2022
Machine Age	mls Client Info	905843	30258	619546
Oil Age	mls Client Info	286297	300	250
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	18	16	18
Chromium	ppm ASTM D5185m >20	<1	<1	1
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	<1	0
Aluminum	ppm ASTM D5185m >20	2	2	<1
Lead	ppm ASTM D5185m >40	1	2	2
Copper	ppm ASTM D5185m >330	26	5	6
Tin	ppm ASTM D5185m >15	<1	<1	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	49	34	59
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	38	40	43
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m 450	471	492	547
Calcium	ppm ASTM D5185m 3000	1651	1708	1933
Phosphorus	ppm ASTM D5185m 1150	775	723	859
Zinc	ppm ASTM D5185m 1350	937	897	1025
Sulfur	ppm ASTM D5185m 4250	2832	2419	2197

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	4	4
Sodium	ppm ASTM D5185m >158	<1	2	<1
Potassium	ppm ASTM D5185m >20	2	0	1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.2	0.2
Nitration	Abs/cm *ASTM D7624 >20	8.6	9.0	9.6
Sulfation	Abs/.1mm *ASTM D7415 >30	23.6	23.5	25.4


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	22.9	22.9	25.0
Base Number (BN)	mg KOH/g ASTM D2896 8.5	9.4	9.3	11.1




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

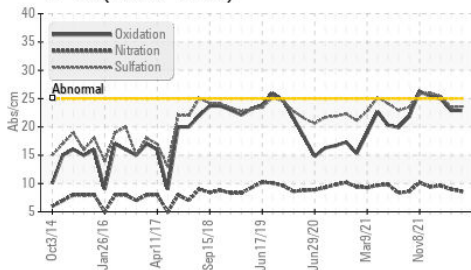

Base Number

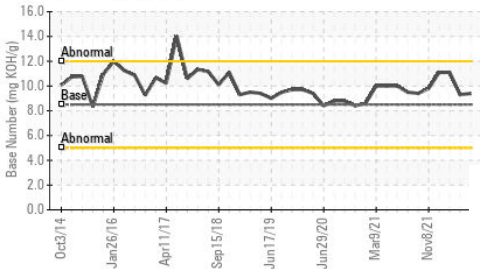

Viscosity @ 100°C

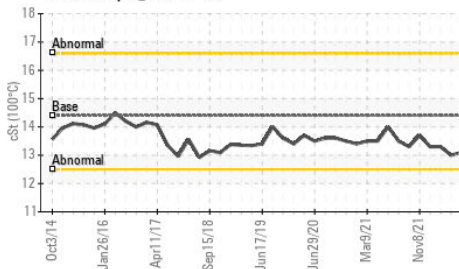


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	13.0

GRAPHS


Ferrous Alloys

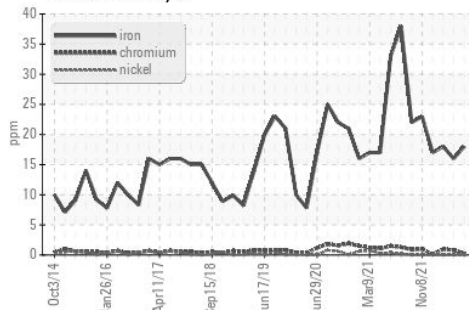


Non-ferrous Metals

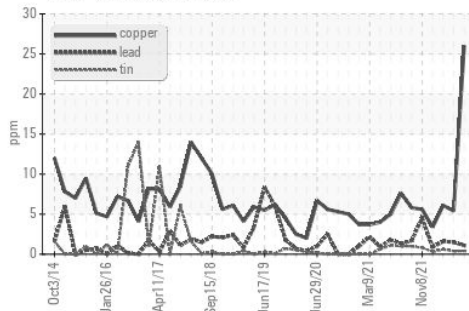

Viscosity @ 100°C

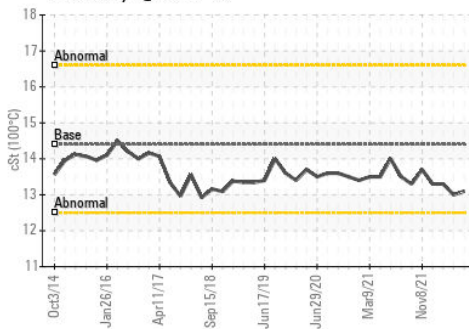

Base Number

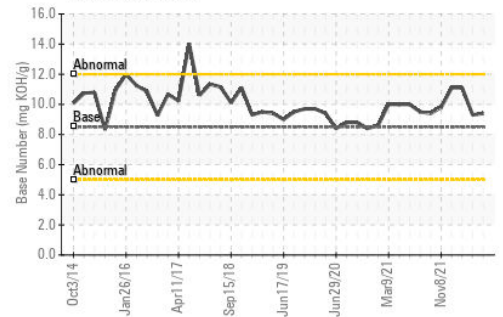

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0918037
 Lab Number : 06204382
 Unique Number : 11071843
 Test Package : CONST (Additional Tests: TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)