


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id **TURBINE-1**

Component **Turbine**

MOBIL SHC 824 (275 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0850005	WC0850000	WC0745755
Sample Date		Client Info		06 Jun 2024	29 Jan 2024	05 Oct 2023
Machine Age	hrs	Client Info		13751	11077	8049
Oil Age	hrs	Client Info		69831	67254	64226
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.03	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>15	0	0	0
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m		0	2	0
Copper	ppm	ASTM D5185m	>5	0	2	0
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	2	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		2	<1	1
Phosphorus	ppm	ASTM D5185m		1108	1077	1031
Zinc	ppm	ASTM D5185m		6	0	0
Sulfur	ppm	ASTM D5185m		25	17	15
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	2	0
Potassium	ppm	ASTM D5185m	>20	2	3	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1184	2570	1918
Particles >6µm		ASTM D7647	>1300	500	809	565
Particles >14μm		ASTM D7647	>160	68	48	19
Particles >21µm		ASTM D7647		18	11	5
Particles >38µm		ASTM D7647	>10	1	0	2
Particles >71μm		ASTM D7647		0	0	1
Oil Cleanliness		ISO 4406 (c)	>20/17/14	17/16/13	19/17/13	18/16/11
FLUID DEGRADA	ATION	method				history2

Acid Number (AN)


mg KOH/g ASTM D8045 0.5


0.23


Contact/Location: CHRIS ADEN - GRENAP




OIL ANALYSIS REPORT

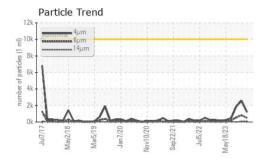







VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method				history2


Visc @ 40°C	cSt	ASTM D445 31.5	30.2	30.6	29.8

SAMPLE IMAGES

Color





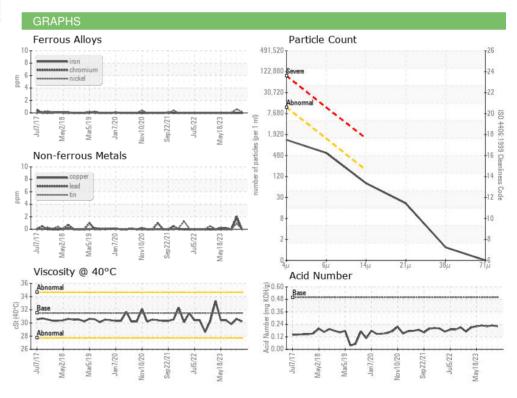





Certificate 12367

Laboratory Sample No.

Lab Number : 06204551 Unique Number : 11072012

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0850005

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Tested Test Package : IND 2

Received : 10 Jun 2024 : 12 Jun 2024

Diagnosed : 12 Jun 2024 - Angela Borella **GREENE VALLEY LANDFILL**

9 SOUTH 610 GREENE ROAD NAPERVILLE, IL

US 60565 Contact: CHRIS ADEN caden@wm.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (630)743-4479 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (630)983-1535