

# **OIL ANALYSIS REPORT**

Sample Rating Trend

**NORMAL** 

# **Paper Machine Reel Pulper DS Agitator**

Agitator Gearbox

MOBIL MOBILGEAR 600 XP 220 (--- GAL)

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		L		Jun 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
		Client Info		WC0776419		
Sample Number Sample Date		Client Info		06 Jun 2024		
Machine Age	hrs	Client Info		00 3411 2024		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status		Oliciti IIIIo		NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	2		
Chromium	ppm	ASTM D5185m	>100	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m	710	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>50	0		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		34		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		2		
Phosphorus	ppm	ASTM D5185m		352		
Zinc	ppm	ASTM D5185m		12		
Sulfur	ppm	ASTM D5185m		19351		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185m	>50	5		
Sodium	ppm	ASTM D5185m	>50	2		
Potassium	ppm	ASTM D5185m	>20	2		
Water	ppm %	ASTM D5165111	>0.1	0.008		
ppm Water	ppm	ASTM D6304 ASTM D6304	>1000	81		
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	18758		
Particles >6µm		ASTM D7647	>5000	1384		
Particles >14µm		ASTM D7647	>640	29		
Particles >21µm		ASTM D7647	>160	6		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	21/18/12		
FLUID DEGRADA	TION	method	limit/base		history	hictory?
A sid Number (AAN)	ma VOLUE	ACTM DODAE	- IIIIII/Dase	current	history1	history2


Acid Number (AN)

mg KOH/g ASTM D8045

0.77



## **OIL ANALYSIS REPORT**

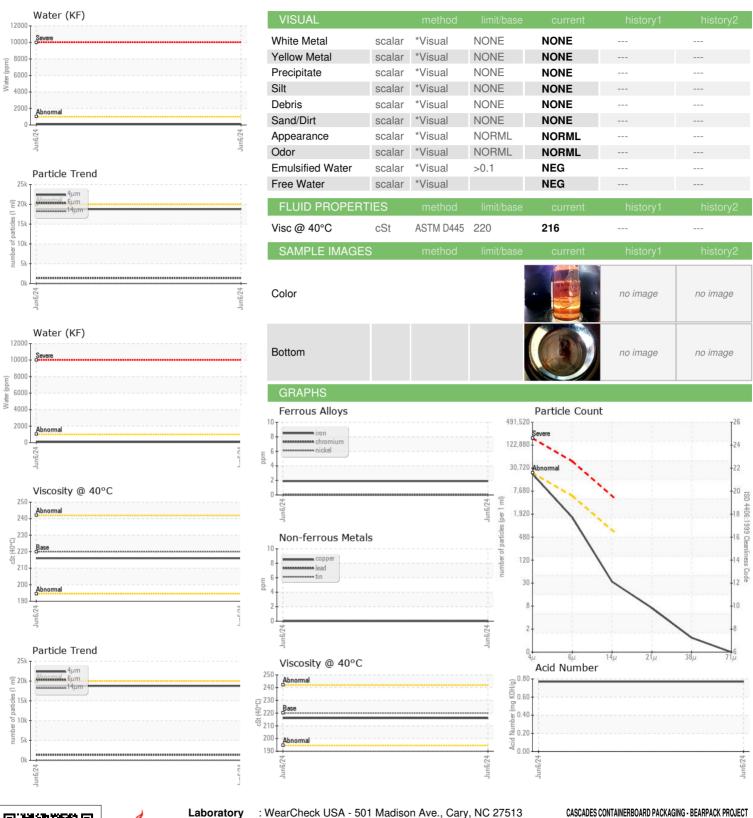



Certificate 12367

Laboratory Sample No. Lab Number

: 06204628

: WC0776419 Unique Number : 11072089 Test Package : PLANT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 Jun 2024

**Tested** : 12 Jun 2024 Diagnosed : 12 Jun 2024 - Doug Bogart

ASHLAND, VA US 23005 Contact: MARC-ANDRE HUBERT

10026 OLD RIDGE ROAD

marc-andre\_hubert@cascades.com

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CASASH [WUSCAR] 06204628 (Generated: 06/12/2024 18:18:28) Rev: 1

Submitted By: MARC-ANDRE HUBERT

T:

F: