




OIL ANALYSIS REPORT

Sample Rating Trend

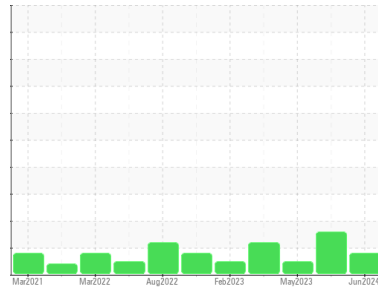

VISCOSITY



Machine Id
CRYOVAC 01 PUMP 1 FREIGHT ELEVATOR

Component

Pump

Fluid

PETRO CANADA PURITY FG SYNTHETIC 100 (18 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand or type of oil. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		USP0012439	USP0005863	USPM18559
Sample Date	Client Info		09 Jun 2024	05 Mar 2024	25 May 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			ATTENTION	ATTENTION	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	4	<1	0
Chromium	ppm	ASTM D5185m >5	0	0	0
Nickel	ppm	ASTM D5185m >5	0	0	0
Titanium	ppm	ASTM D5185m >3	<1	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >7	3	2	0
Lead	ppm	ASTM D5185m >12	<1	0	<1
Copper	ppm	ASTM D5185m >30	3	<1	0
Tin	ppm	ASTM D5185m >9	0	<1	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m	0	0	0
Calcium	ppm	ASTM D5185m	2	12	0
Phosphorus	ppm	ASTM D5185m	764	672	876
Zinc	ppm	ASTM D5185m	50	11	0
Sulfur	ppm	ASTM D5185m	1306	1168	0

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >60	4	6	3
Sodium	ppm	ASTM D5185m	7	2	0
Potassium	ppm	ASTM D5185m >20	2	0	0
Water	%	ASTM D6304 >.1	0.002	0.002	0.043
ppm Water	ppm	ASTM D6304 >1000	22	24	430.3

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	3857	6081	4396
Particles >6µm	ASTM D7647	>1300	729	1127	1105
Particles >14µm	ASTM D7647	>160	23	54	24
Particles >21µm	ASTM D7647	>40	3	10	4
Particles >38µm	ASTM D7647	>10	0	1	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	19/17/12	20/17/13	19/17/12

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.5	0.16	0.15	0.07




OIL ANALYSIS REPORT

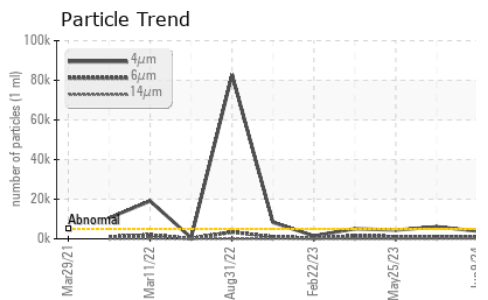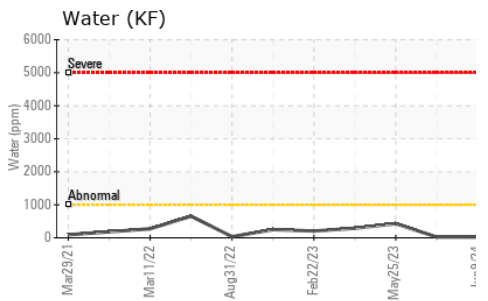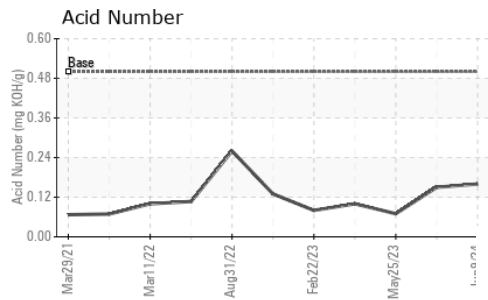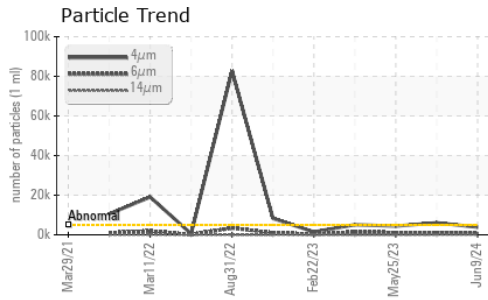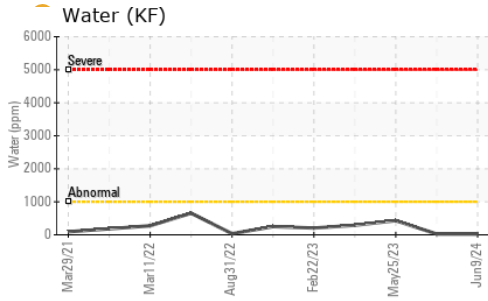






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	98.7	87.4	85.5	101

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

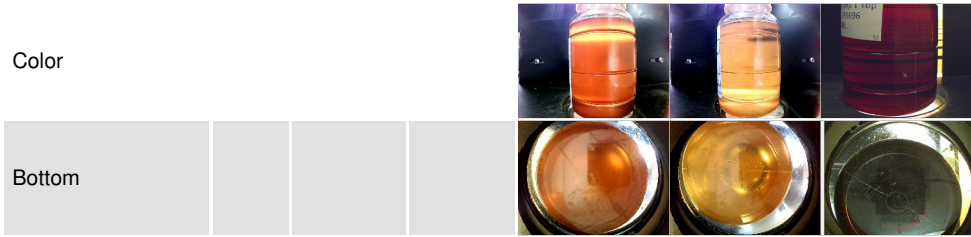

GRAPHS

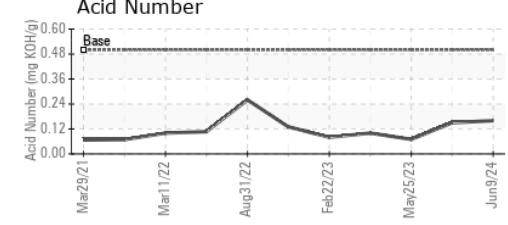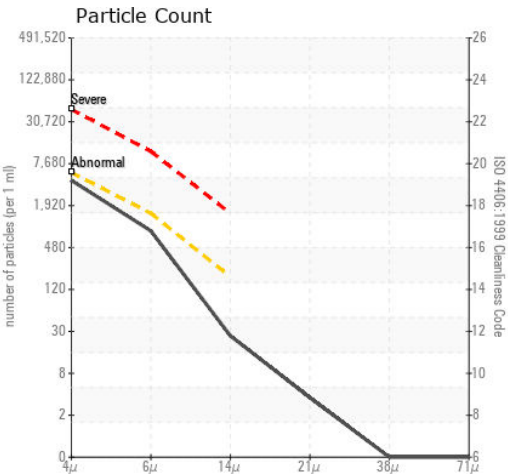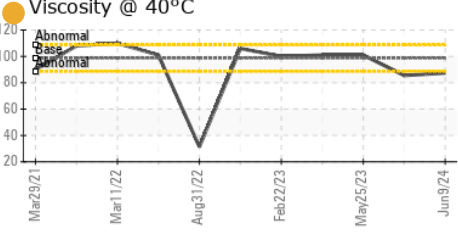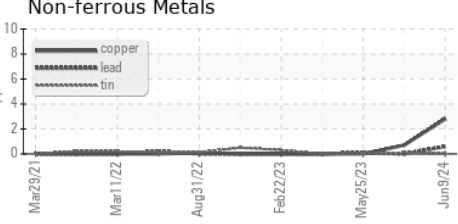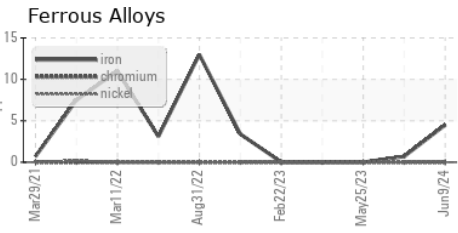

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP0012439 **Received** : 10 Jun 2024
Lab Number : 06204713 **Tested** : 11 Jun 2024
Unique Number : 11072174 **Diagnosed** : 12 Jun 2024 - Doug Bogart
Test Package : IND 2

SMITHFIELD FOODS - SMIMIL
 22123 HWY 5
 MILAN, MO
 US 63556
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)