

OIL ANALYSIS REPORT







Machine Id

NK 112802

Component Compressor

CIMARRON HB-150 (--- GAL)

Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2024	May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
	17(11011		mmobase			
Sample Number		Client Info		TO90004241	TO90003993	
Sample Date	hvo	Client Info		24 May 2024 0	12 Apr 2024	
Machine Age Oil Age	hrs hrs	Client Info		0	0	
Oil Changed	1115	Client Info		N/A	N/A	
Sample Status		Ciletit itilo		NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	7	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m		0	<1	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	<1	4	
Lead	ppm	ASTM D5185m	>25	1	0	
Copper	ppm		>50	<1	<1	
Tin	ppm	ASTM D5185m	>15	2	<1	
Vanadium	ppm	ASTM D5185m		<1	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	4	0	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	<1	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	0	0	<1	
Calcium	ppm	ASTM D5185m	0	0	5	
Phosphorus	ppm	ASTM D5185m	0	7	25	
Zinc	ppm	ASTM D5185m	0	0	2	
Sulfur	ppm	ASTM D5185m	0	68	131	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	9	
Sodium	ppm	ASTM D5185m		0	7	
Potassium	ppm	ASTM D5185m	>20	3	2	
Water	%	ASTM D6304	>2.26	0.404	△ 0.337	
ppm Water	ppm	ASTM D6304	>22600	4041	▲ 3380	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	3570	<u></u> 103935	
Particles >6µm		ASTM D7647	>2500	957	<u>▲</u> 36514	
Particles >14μm		ASTM D7647	>320	26	1 930	
Particles >21µm		ASTM D7647	>80	2	▲ 335	
Particles >38μm		ASTM D7647	>20	1	5	
Particles >71μm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/12	<u>4</u> 24/22/18	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.23	0.18	



OIL ANALYSIS REPORT

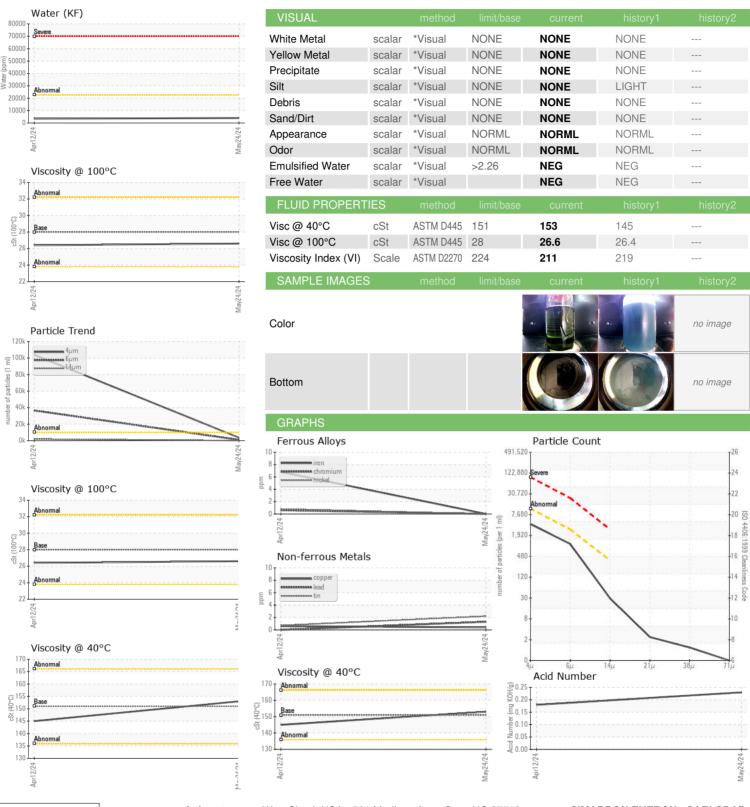





Certificate 12367

Laboratory Sample No.

: TO90004241 Lab Number : 06204742 Unique Number : 11072203

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 Jun 2024 **Tested** : 13 Jun 2024

: 13 Jun 2024 - Doug Bogart Diagnosed Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CIMARRON ENERGY - CARLSBAD

4425 GRANDI RD, UNIT F CARLSBAD, NM UM 88220-8923 Contact: CARLOS LEAL

cleal@cimarron.com T:

F: