

# OIL ANALYSIS REPORT

Area

**PAL 45**


Machine Id

**SULLIVAN PALATEK 1703140001 - CMS LAND PETOSKEY MI**

Component

**Compressor**

Sample Rating Trend

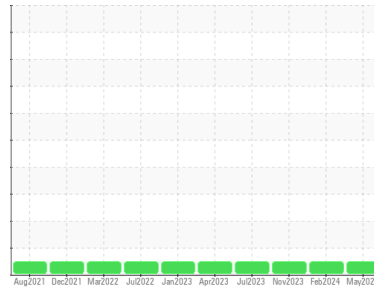

**NORMAL**



**DIAGNOSIS**

**Recommendation**

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

Moderate concentration of visible dirt/debris present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>UCS06204801</b>	UCS06152124	UCS06045031
Sample Date	Client Info	<b>21 May 2024</b>	13 Feb 2024	09 Nov 2023
Machine Age	hrs	Client Info	<b>30231</b>	29701
Oil Age	hrs	Client Info	<b>2044</b>	1514
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION** method limit/base current history1 history2

Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
-------	-----------	------	------------	-----	-----

**WEAR METALS** method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m		<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m	0.0	<b>0</b>	<1	0
Phosphorus	ppm	ASTM D5185m	966	<b>625</b>	676	591
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	1309	<b>978</b>	1162	853



**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	<1
Sodium	ppm	ASTM D5185m		<b>1</b>	1	1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	0

**FLUID DEGRADATION** method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	<b>0.20</b>	0.22	0.139
------------------	----------	------------	-------	-------------	------	-------


# OIL ANALYSIS REPORT

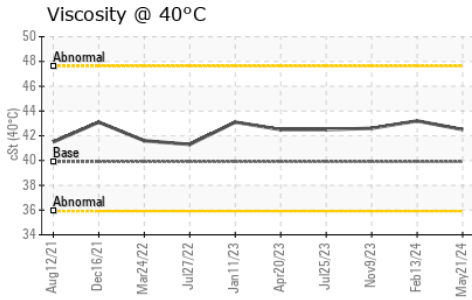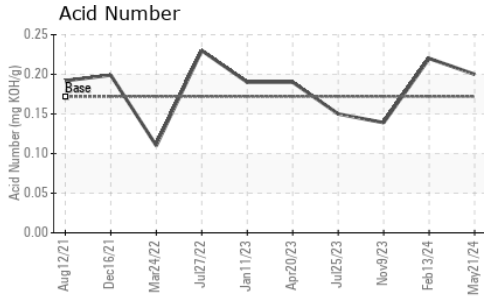





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	39.9	<b>42.5</b>	43.2	42.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

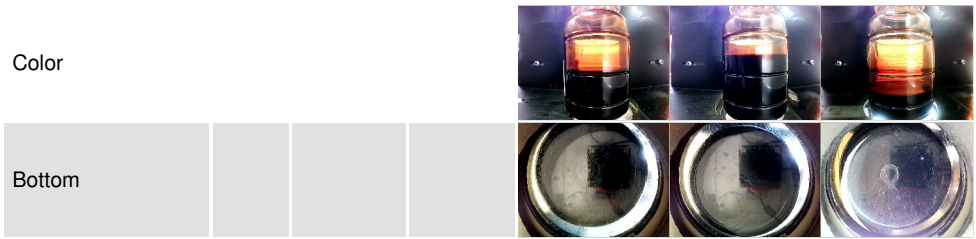

## GRAPHS

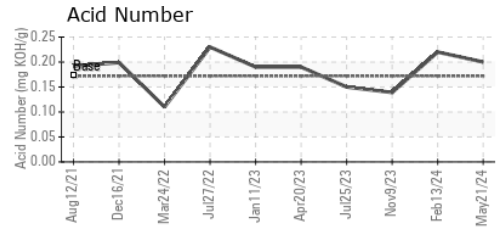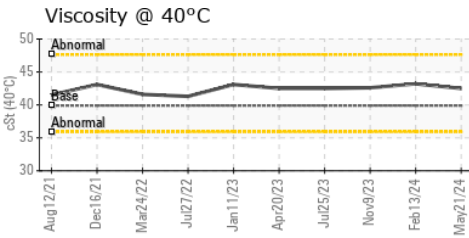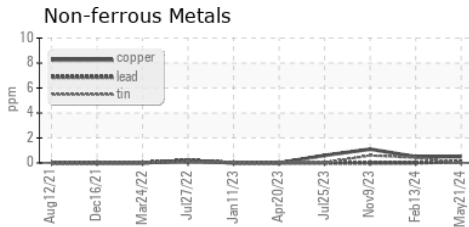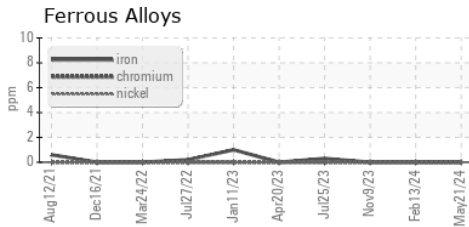

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06204801 **Received** : 10 Jun 2024  
**Lab Number** : **06204801** **Tested** : 11 Jun 2024  
**Unique Number** : 11072262 **Diagnosed** : 12 Jun 2024 - Sean Felton  
**Test Package** : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**AIRLEX**

TRAVERSE CITY, MI  
 US 49686  
 Contact: MIKE  
 office@airlex.com  
 T: (231)929-1601  
 F: