

OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Machine Id
VOLVO A30G 752469
 Component
Wet Disc Brake
 Fluid
VOLVO WB 102 (--- GAL)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. All other component wear rates are normal.

▲ Contamination

There is a moderate amount of visible silt present in the sample.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0002005	---	---
Sample Date	Client Info		04 Jun 2024	---	---
Machine Age	hrs	Client Info	1889	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	10	---	---
Chromium	ppm	ASTM D5185m >10	0	---	---
Nickel	ppm	ASTM D5185m >10	<1	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >10	<1	---	---
Lead	ppm	ASTM D5185m >10	0	---	---
Copper	ppm	ASTM D5185m >75	▲ 220	---	---
Tin	ppm	ASTM D5185m >10	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	129	---	---
Barium	ppm	ASTM D5185m	3	---	---
Molybdenum	ppm	ASTM D5185m	0	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	6	---	---
Calcium	ppm	ASTM D5185m	3424	---	---
Phosphorus	ppm	ASTM D5185m	1237	---	---
Zinc	ppm	ASTM D5185m	1429	---	---
Sulfur	ppm	ASTM D5185m	5032	---	---



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	15	---	---
Sodium	ppm	ASTM D5185m	5	---	---
Potassium	ppm	ASTM D5185m >20	6	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	▲ MODER	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.1	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

OIL ANALYSIS REPORT


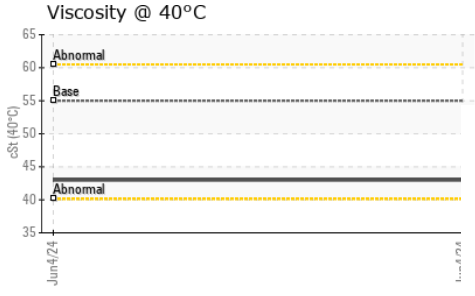
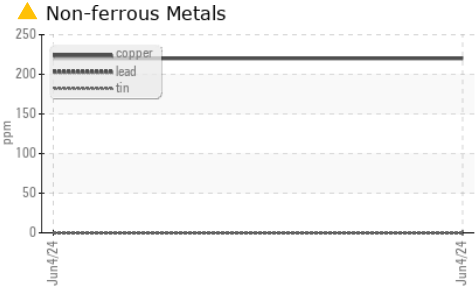


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 55	43.0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

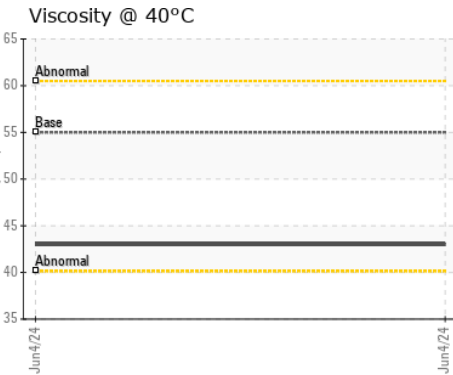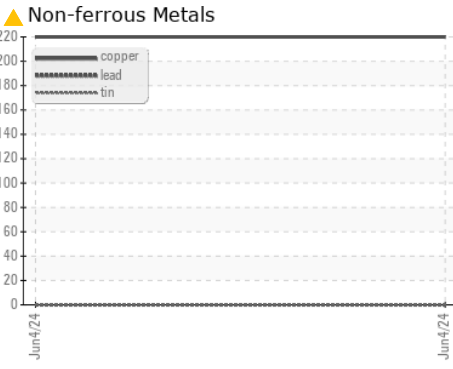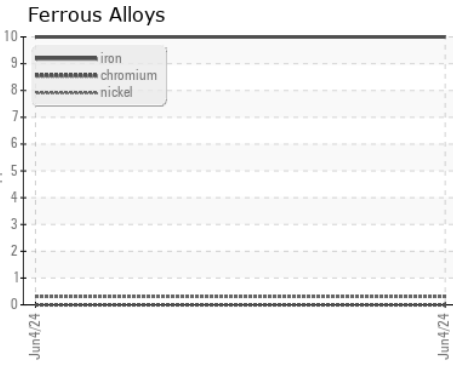

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002005
Lab Number : **06205125**
Unique Number : 11072586
Test Package : CONST

MCCLUNG-LOGAN EQUIPMENT CO - WINCHESTER
 160 KENTMERE COURT
 WINCHESTER, VA
 US 22603
 Contact: DAKOTA HARTLEY
 dhartley@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)