




OIL ANALYSIS REPORT



Area
KANSAS/44/EG - LOADER
 Machine Id
45.44L [KANSAS^44^EG - LOADER]
 Component
Front Differential
 Fluid
MOBIL MOBILFLUID 424 (--- GAL)

Sample Rating Trend

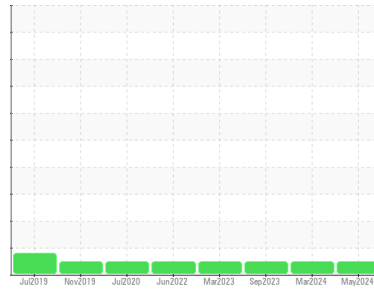

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0918072	WC0901308	WC0833850
Sample Date	Client Info		29 May 2024	11 Mar 2024	26 Sep 2023
Machine Age	hrs	Client Info	0	4098	3851
Oil Age	hrs	Client Info	0	1871	2227
Oil Changed	Client Info		Not Chngd	Not Chngd	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	106	116	79
Chromium	ppm	ASTM D5185m	>3	1	2	<1
Nickel	ppm	ASTM D5185m	>3	4	5	4
Titanium	ppm	ASTM D5185m	>2	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	2	2
Lead	ppm	ASTM D5185m	>13	0	0	<1
Copper	ppm	ASTM D5185m	>103	1	2	1
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		133	116	145
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		5	6	5
Manganese	ppm	ASTM D5185m		2	2	2
Magnesium	ppm	ASTM D5185m		21	19	20
Calcium	ppm	ASTM D5185m		3542	3462	3412
Phosphorus	ppm	ASTM D5185m		1146	1147	1129
Zinc	ppm	ASTM D5185m		1432	1409	1412
Sulfur	ppm	ASTM D5185m		5946	5792	4821

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>100	18	18	13
Sodium	ppm	ASTM D5185m		10	6	7
Potassium	ppm	ASTM D5185m	>20	2	2	0

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT

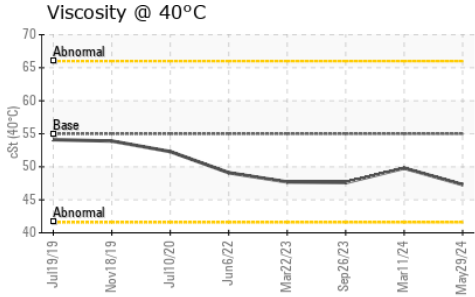




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	55	47.3	49.8	47.6
-------------	-----	-----------	----	-------------	------	------

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

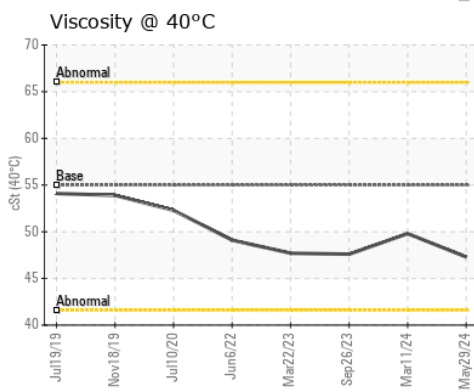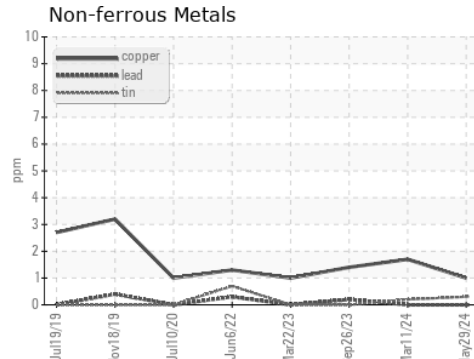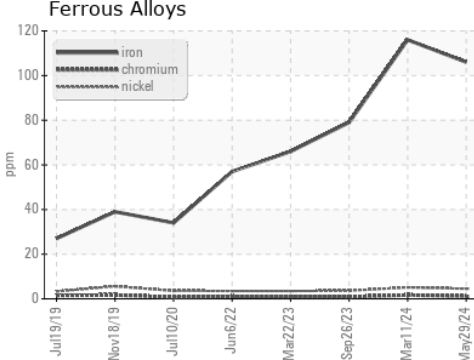

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918072 **Received** : 10 Jun 2024
Lab Number : **06205186** **Tested** : 12 Jun 2024
Unique Number : 11072647 **Diagnosed** : 12 Jun 2024 - Angela Borella
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)