




FUEL REPORT

Sample Rating Trend

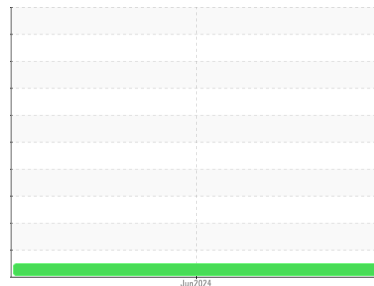

NORMAL



Machine Id

KIOTI DK6020HSE PA4V-A0126

Component

Diesel Fuel

Fluid

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)

DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets ASTM D975 specifications for No.2 low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KT0000931	---	---
Sample Date	Client Info			10 Jun 2024	---	---
Machine Age	hrs	Client Info		84	---	---
Sample Status				NORMAL	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298	0.839	0.813	---	---
Fuel Color	text	*Visual Screen	Yellow	Orang	---	---
ASTM Color	scalar	*ASTM D1500		L4.0	---	---
Visc @ 40°C	cSt	ASTM D445	3.0	3.15	---	---
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	78	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	0	---	---
Sulfur (UVF)	ppm	ASTM D5453		3	---	---






DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	177	---	---
5% Distillation Point	°C	ASTM D86		232	---	---
10% Distill Point	°C	ASTM D86	201	255	---	---
15% Distillation Point	°C	ASTM D86		267	---	---
20% Distill Point	°C	ASTM D86	216	273	---	---
30% Distill Point	°C	ASTM D86	230	282	---	---
40% Distill Point	°C	ASTM D86	243	289	---	---
50% Distill Point	°C	ASTM D86	255	294	---	---
60% Distill Point	°C	ASTM D86	267	298	---	---
70% Distill Point	°C	ASTM D86	280	302	---	---
80% Distill Point	°C	ASTM D86	295	308	---	---
85% Distillation Point	°C	ASTM D86		313	---	---
90% Distill Point	°C	ASTM D86	310	320	---	---
95% Distillation Point	°C	ASTM D86		336	---	---
Final Boiling Point	°C	ASTM D86	341	340	---	---
Distillation Residue	%	ASTM D86	3.0	1.4	---	---
Distillation Loss	%	ASTM D86	3.0	1.3	---	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	42.5	---	---
Cetane Index		ASTM D4737	<40.0	74.0	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0	---	---
Sodium	ppm	ASTM D5185m	<0.1	1	---	---
Potassium	ppm	ASTM D5185m	<0.1	<1	---	---
Water	%	ASTM D6304	<0.05	0.008	---	---
ppm Water	ppm	ASTM D6304	<500	83	---	---
% Gasoline	%	*In-House	<0.50	0.0	---	---
% Biodiesel	%	*In-House	<20.0	14.4	---	---





FUEL REPORT

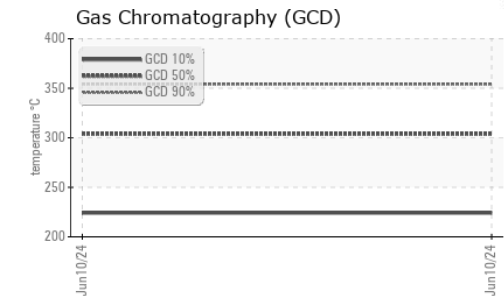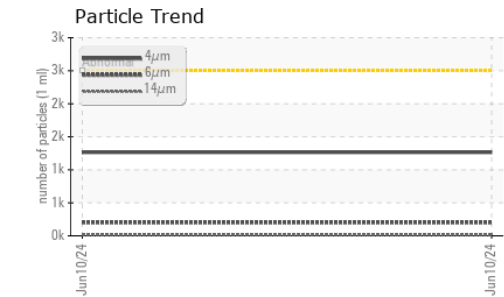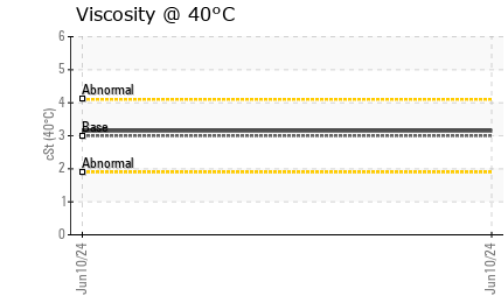
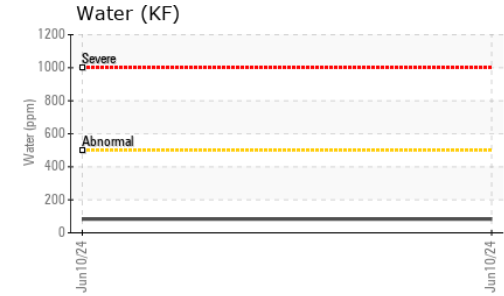
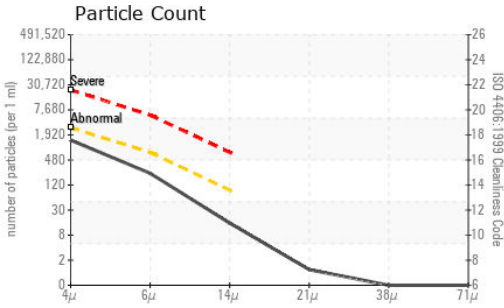


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	1264	---	---
Particles >6µm	ASTM D7647	>640	202	---	---
Particles >14µm	ASTM D7647	>80	13	---	---
Particles >21µm	ASTM D7647	>20	1	---	---
Particles >38µm	ASTM D7647	>4	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	17/15/11	---	---

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	0	---	---
Nickel	ppm	ASTM D5185m <0.1	<1	---	---
Lead	ppm	ASTM D5185m <0.1	0	---	---
Vanadium	ppm	ASTM D5185m <0.1	0	---	---
Iron	ppm	ASTM D5185m <0.1	0	---	---
Calcium	ppm	ASTM D5185m <0.1	0	---	---
Magnesium	ppm	ASTM D5185m <0.1	<1	---	---
Phosphorus	ppm	ASTM D5185m <0.1	0	---	---
Zinc	ppm	ASTM D5185m <0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

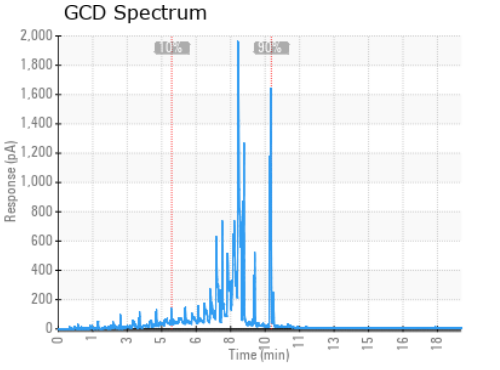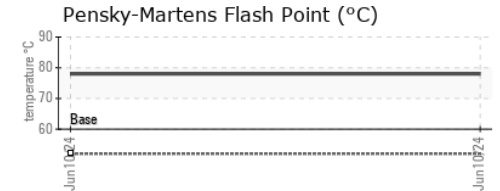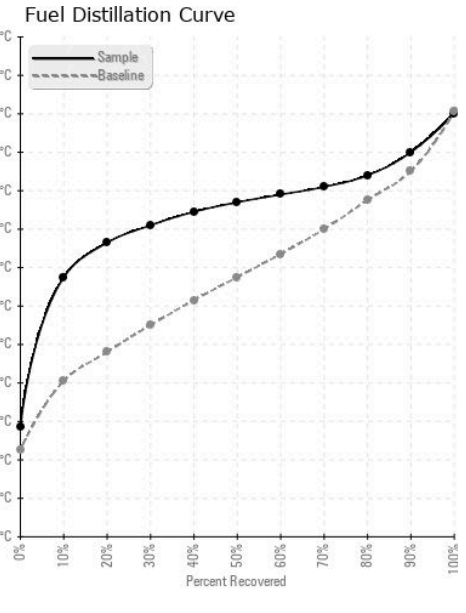

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KT0000931 **Received** : 10 Jun 2024
Lab Number : **06205268** **Tested** : 18 Jun 2024
Unique Number : 11072729 **Diagnosed** : 18 Jun 2024 - Doug Bogart
Test Package : DF-2 (Additional Tests: Fuel, Screen)

SAN JOAQUIN TRACTOR
 1201 S UNION AVE
 BAKERSFIELD, CA
 US 93305
 Contact: FRED Jauch
 fred@sanjoaquintractor.com
 T: (661)324-4517
 F: (661)324-2306

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)