

FUEL REPORT

Area QTS SUWANEE DC2 [17756] [QTS SUWANEE DC2] G1-4

Diesel Fuel

Fluid No.2 DIESEL FUEL (ULTRALOW SULPHUR) (8000 GAL)

DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.




Sample Rating Trend




SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0953864		
Sample Date		Client Info		20 May 2024		
Machine Age	hrs	Client Info		0		
Sample Status				NORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Fuel Color	text	*Visual Screen	Yllow	Red		
ASTM Color	scalar	*ASTM D1500		L4.5		
Visc @ 40°C	cSt	ASTM D445	3.0	2.63		
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	66.8		
SULFUR CONTER	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	0		
Sulfur (UVF)	ppm	ASTM D5453		49		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	178		
5% Distillation Point	°C	ASTM D86		201		
10% Distill Point	°C	ASTM D86	201	210		
15% Distillation Point	°C	ASTM D86		218		
20% Distill Point	°C	ASTM D86	216	225		
30% Distill Point	°C	ASTM D86	230	239		
40% Distill Point	°C	ASTM D86	243	252		
50% Distill Point	°C	ASTM D86	255	264		
60% Distill Point	°C	ASTM D86	267	277		
70% Distill Point	°C	ASTM D86	280	290		
80% Distill Point	°C	ASTM D86	295	304		
85% Distillation Point	°C	ASTM D86		314		
90% Distill Point	°C	ASTM D86	310	324		
95% Distillation Point	°C	ASTM D86		341		
Final Boiling Point	°C	ASTM D86	341	356		
IGNITION QUALI	ΓY	method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	35		
Cetane Index		ASTM D4737	<40.0	47		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	<0.1	2		
Potassium	ppm	ASTM D5185m	<0.1	1		
Water	%	ASTM D6304	< 0.05	0.003		
ppm Water	ppm	ASTM D6304	<500	30		
% Gasoline	%	*In-House	<0.50	0.0		
% Biodiesel	%	*In-House	<20.0	0.0		




FUEL REPORT

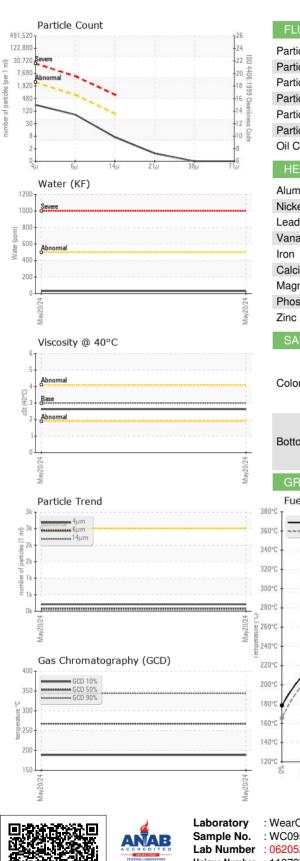

UID CLEANLIN	IESS	method	limit/base	current	history1	history2
icles >4µm		ASTM D7647	>2500	211		
icles >6µm		ASTM D7647	>640	72		
icles >14µm		ASTM D7647	>80	6		
icles >21µm		ASTM D7647	>20	1		
icles >38µm		ASTM D7647	>4	0		
icles >71μm		ASTM D7647	>3	0		
Cleanliness		ISO 4406 (c)	>18/16/13	15/13/10		
AVY METALS		method	limit/base	current	history1	history2
ninum	ppm	ASTM D5185m	<0.1	0		
el	ppm	ASTM D5185m	<0.1	<1		
i	ppm	ASTM D5185m	<0.1	0		
adium	ppm	ASTM D5185m	<0.1	0		
	ppm	ASTM D5185m	<0.1	0		
ium	ppm	ASTM D5185m	<0.1	0		
nesium	ppm	ASTM D5185m	<0.1	1		
phorus	ppm	ASTM D5185m	<0.1	0		
	ppm	ASTM D5185m	<0.1	0		
MPLE IMAGES	S	method	limit/base	current	history1	history2
-					no ímago	no imoro
					no image	no image
ı						
r am					no imaga	no imoro
					no image	no image
om					no image	no image
om RAPHS	irve			Pensky-Marter	no image ns Flash Point (
om RAPHS el Distillation Cu Sample	irve		9 ⁸ 197	0 T		
om RAPHS el Distillation Cu Sample	Irve		ې متبله ور ه ۲۰ و م	0		
om RAPHS el Distillation Cu Sample	Irve		3. antheside	0 0 Base		°C)
om RAPHS el Distillation Cu Sample	irve			Base		°C)
om RAPHS el Distillation Cu	Irve		antreaduat 5	GCD Spectrur	ns Flash Point (
om RAPHS el Distillation Cu Sample	irve		antiperadual 5	GCD Spectrur	ns Flash Point (°C)
om RAPHS el Distillation Cu Sample	Irve		antreaduat 5	GCD Spectrur	ns Flash Point (°C)







PETROLEUM RECOVERY SERVICES : WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0953864 Received : 10 Jun 2024 210 POWELL DR Lab Number : 06205287 Tested : 18 Jun 2024 SUMMERVILLE, SC Unique Number : 11072748 Diagnosed : 18 Jun 2024 - Elizabeth Valachovic US 29483 Test Package : DF-2 (Additional Tests: Fuel, Screen) Contact: AJAY EL Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. Ajay@prsfuel.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (843)225-1777 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: AJAY EL - PETSUM

F: