

[Z20841]

OIL ANALYSIS REPORT

Sample Rating Trend



SAMPLE 6 Component Hydraulic System Fluid {not provided} (--- LTR)

DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

Area

All component wear rates are normal.

Contamination

Appearance is milky. There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil.


Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC06205355		
Sample Date		Client Info		30 May 2024		
Machine Age	kms	Client Info		0		
Oil Age	kms	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	12		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	3		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	16		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		65		
Phosphorus	ppm	ASTM D5185m		295		
Zinc	ppm	ASTM D5185m		393		
Sulfur	ppm	ASTM D5185m		1126		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	10		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.1	<u> </u>		
ppm Water	ppm	ASTM D6304	>1000	A 1510		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2053		
Particles >6µm		ASTM D7647	>1300	1118		
Particles >14µm		ASTM D7647	>160	e 190		
Particles >21µm		ASTM D7647	>40	64		
Particles >38µm		ASTM D7647	>10	10		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	e 18/17/15		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.39		
× /	5					



OIL ANALYSIS REPORT

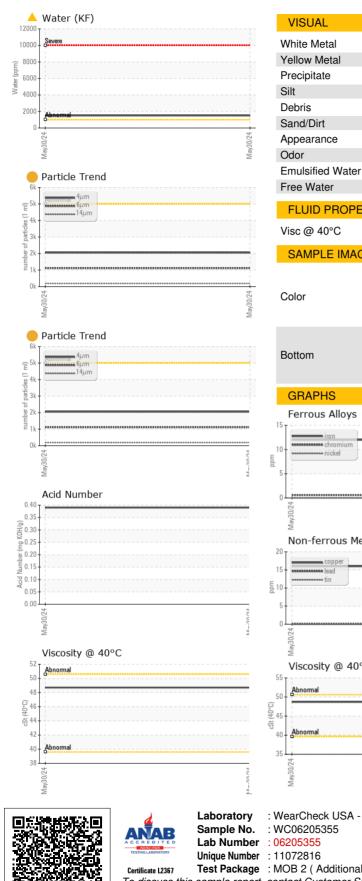

method limit/base history1 history2 current NONE NONE *Visual scalar *Visual NONE NONE scalar NONE scalar *Visual NONE scalar *Visual NONE NONE *Visual NONE scalar NONE NONE NONE scalar *Visual NORML scalar *Visual MILKY *Visual NORML NORML scalar *Visual scalar >0.1 0.2% scalar *Visual NEG FLUID PROPERTIES method limit/base current history history cSt ASTM D445 48.7 SAMPLE IMAGES method limit/base history1 history2 current no image no image no image no imade Particle Count 491.5 122,88 30.72 7 68 Mav30/24 (per 1 1 4406 1.92 :1999 Cle Non-ferrous Metals 480 120 14 31 Aav30/74 214 38,4 Viscosity @ 40°C Acid Number (B^{0.4} HOX 0.30 0.20 0.10 Acid 0.00 Mav30/74 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 GLOBAL OIL NZ Received : 10 Jun 2024 62B MILTON RD Tested : 18 Jun 2024 OTUMOETAI, ZZ



Diagnosed : 18 Jun 2024 - Jonathan Hester Test Package : MOB 2 (Additional Tests: KF) To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x:

Contact: SCOTT NICHOLLS

scott@astrea.co.nz T: (642)145-5680

Contact/Location: SCOTT NICHOLLS - GLOBALNZ

NZ 3110