


OIL ANALYSIS REPORT

Sample Rating Trend

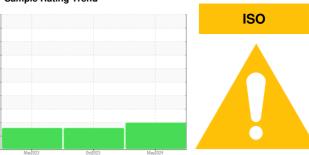

Machine Id

5986115 (S/N 1147)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

		Ma	r2023	Oct2023 May20	24	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018171	KCPA009496	KCPA001253
Sample Date		Client Info		31 May 2024	26 Oct 2023	21 Mar 2023
Machine Age	hrs	Client Info		18827	15928	13777
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	5	12
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	2	19	4
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	1	10
Zinc	ppm	ASTM D5185m		0	21	7
Sulfur	ppm	ASTM D5185m		18590	17068	15346
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		3	13	2
Potassium	ppm	ASTM D5185m		0	3	2
Water	%	ASTM D6304	>0.05	0.008	0.016	0.009
ppm Water	ppm	ASTM D6304	>500	84	164.6	91.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		46449	50478	10267
Particles >6µm		ASTM D7647	>1300	<u>^</u> 22922	<u>^</u> 20386	<u>^</u> 2840
Particles >14μm		ASTM D7647	>80	<u> </u>	▲ 745	<u>▲</u> 167
Particles >21µm		ASTM D7647	>20	<u>^</u> 256	<u>119</u>	4 9
Particles >38μm		ASTM D7647	>4	<u>^</u> 6	1	2
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>23/22/18</u>	<u>\$\rightarrow\$ 23/22/17</u>	<u>21/19/15</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.34	0.33



OIL ANALYSIS REPORT

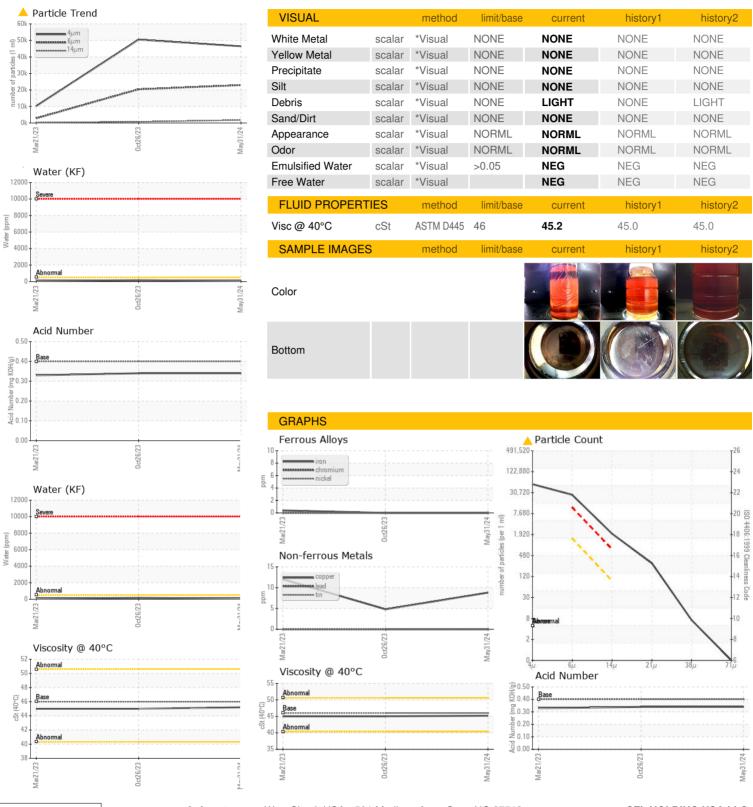



Certificate 12367

Laboratory Sample No. Lab Number

: KCPA018171 : 06205447 Unique Number : 11072908

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 Jun 2024 **Tested** : 12 Jun 2024

: 13 Jun 2024 - Don Baldridge Diagnosed

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CFL HOLDING USA LLC 3576 HWY 41 SE

ADAIRSVILLE, GA US 30103

Contact: MARC LOPEZ marc.lopez@cflflooring.com

T:

Contact/Location: MARC LOPEZ - CFLADA

F: