

OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Machine Id

KAESER BSD 50 5784539 (S/N 1633)

Component Compressor

Fluid KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

A Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

🔺 Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|----------------------------------|------------|--------------------------|------------|-----------------|------------------|------------------|
| Sample Number | | Client Info | | KC124824 | KC75827 | KC68575 |
| Sample Date | | Client Info | | 09 May 2024 | 06 May 2019 | 23 Feb 2018 |
| Machine Age | hrs | Client Info | | 38680 | 15693 | 9159 |
| Oil Age | hrs | Client Info | | 0 | 4000 | 4000 |
| Oil Changed | | Client Info | | N/A | Changed | Changed |
| Sample Status | | | | ABNORMAL | NORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | 0 | 1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | <u> </u> | <1 | <u> </u> |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >50 | <1 | 1 | <1 |
| Tin | ppm | ASTM D5185m | >10 | 0 | <1 | 0 |
| Antimony | ppm | ASTM D5185m | | | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | 500 | 348 | 35 | 321 |
| Zinc | ppm | ASTM D5185m | | 175 | 7 | 159 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | | ASTM D5185m | | <1 | <1 | 0 |
| Sodium | ppm ppm | ASTM D5185m | >20 | 2 | 0 | <1 |
| Potassium | | ASTM D5185m | >20 | 0 | <1 | <1 |
| | ppm | | | 0.002 | | |
| Water ppm Water | % ppm | ASTM D6304 ASTM D6304 | >5005 | 23 | 0.003 30 | 0.003 |
| FLUID CLEANLIN | | | | | | |
| | NEOO | method ASTM D7647 | limit/base | current 2365 | history1 2504 | history2 2781 |
| Particles >4µm Particles >6µm | | ASTM D7647 ASTM D7647 | <1300 | 2365 923 | 2504 702 | 1035 |
| Particles >14µm | | ASTM D7647 ASTM D7647 | >80 | 923 | 21 | 42 |
| | | ASTM D7647 ASTM D7647 | | 19 | 6 | 42 |
| Particles >21µm | | | | | | 12 |
| Particles >38µm | | ASTM D7647 | >4 | 1 | 0 | |
| Particles >71µm | | ASTM D7647 | | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | 18/17/14 | 17/12 | 17/13 |
| FLUID DEGRAD | | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.5 | 0.99 | 0.304 | 0.793 |
| | | | | | | |


Contact/Location: Service Manager - SISLUV Page 1 of 2



OIL ANALYSIS REPORT






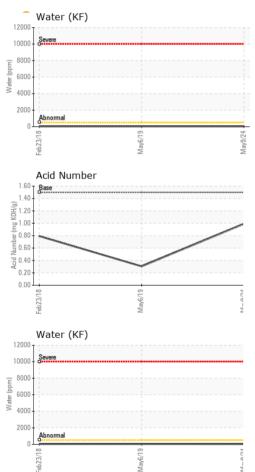

59

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 46 | 48.9 | 47.45 | 46.74 |
| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
| Color | | | | | | |
| | | | | 1 | | |

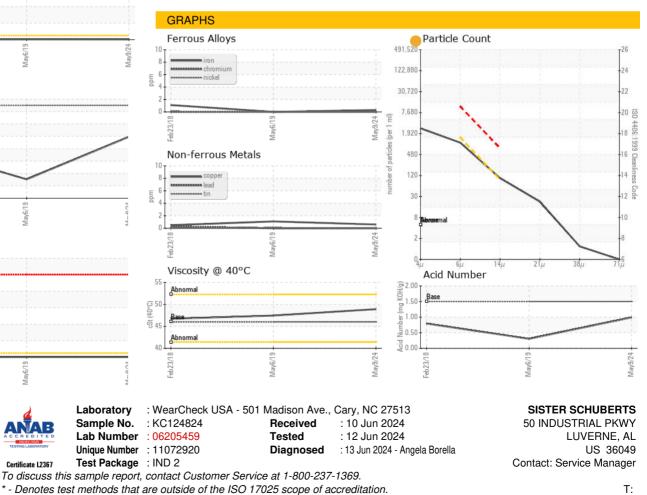

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: SISLUV [WUSCAR] 06205459 (Generated: 06/15/2024 07:00:51) Rev: 1

Contact/Location: Service Manager - SISLUV Page 2 of 2

F: