




OIL ANALYSIS REPORT

Sample Rating Trend

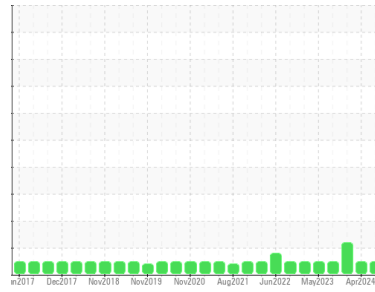

NORMAL



Machine Id
BUSCH MULTIVAC-1 BUSCH 5
 Component
Pump
 Fluid
USPI VAC 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USPM37652	USP0006782	USPM30289
Sample Date	Client Info	09 Jun 2024	15 Apr 2024	28 Feb 2024
Machine Age	hrs Client Info	0	0	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>90	9	8	6
Chromium ppm ASTM D5185m	>5	0	<1	0
Nickel ppm ASTM D5185m	>5	0	0	0
Titanium ppm ASTM D5185m	>3	0	0	0
Silver ppm ASTM D5185m	>3	0	0	0
Aluminum ppm ASTM D5185m	>7	<1	<1	<1
Lead ppm ASTM D5185m	>12	0	0	0
Copper ppm ASTM D5185m	>30	0	0	0
Tin ppm ASTM D5185m	>9	0	<1	1
Vanadium ppm ASTM D5185m		<1	0	<1
Cadmium ppm ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	0	0	0	<1
Barium ppm ASTM D5185m	0	0	0	0
Molybdenum ppm ASTM D5185m	0	0	0	0
Manganese ppm ASTM D5185m		0	<1	0
Magnesium ppm ASTM D5185m	0	0	0	0
Calcium ppm ASTM D5185m	0	0	2	0
Phosphorus ppm ASTM D5185m	1800	1632	1878	1488
Zinc ppm ASTM D5185m	0	0	0	<1
Sulfur ppm ASTM D5185m	0	26	0	0

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>60	3	3	3
Sodium ppm ASTM D5185m		<1	0	<1
Potassium ppm ASTM D5185m	>20	<1	0	0
Water % ASTM D6304	>.1	0.061	0.033	0.024
ppm Water ppm ASTM D6304	>1000	616	335	250

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	1043	1868	4620
Particles >6µm ASTM D7647	>1300	387	598	1989
Particles >14µm ASTM D7647	>160	48	55	218
Particles >21µm ASTM D7647	>40	11	12	33
Particles >38µm ASTM D7647	>10	1	0	2
Particles >71µm ASTM D7647	>3	0	0	0
Oil Cleanliness ISO 4406 (c)	>19/17/14	17/16/13	18/16/13	19/18/15

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.05	0.36	0.36	0.35




OIL ANALYSIS REPORT

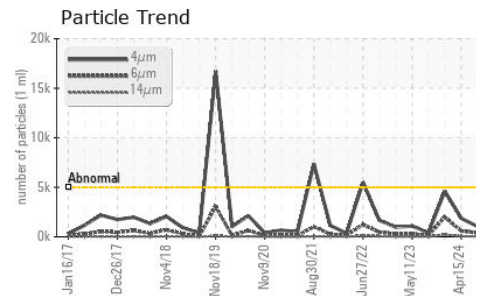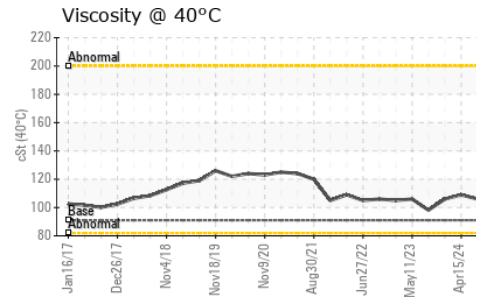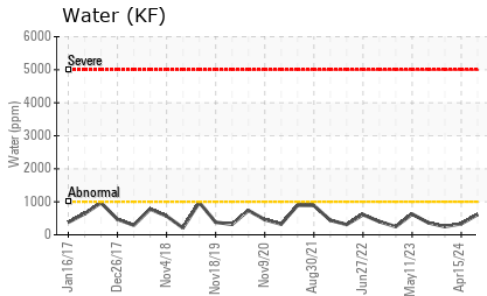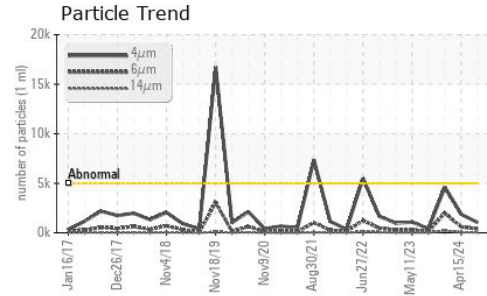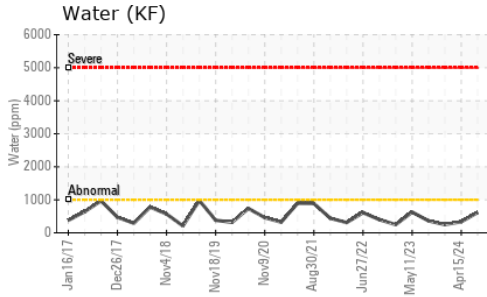






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 91	106	109	106

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

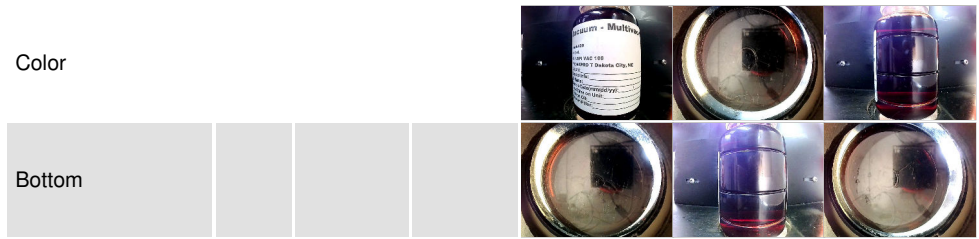

GRAPHS

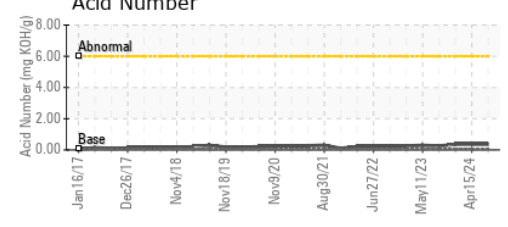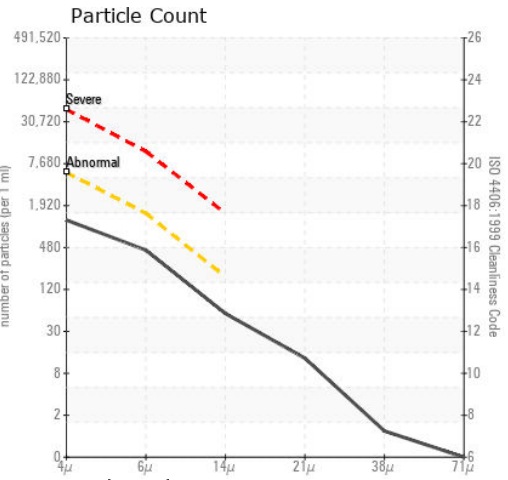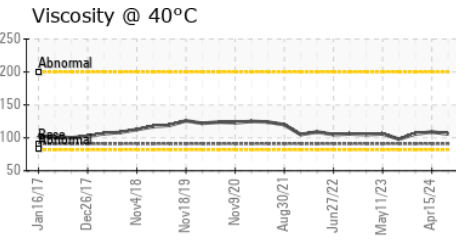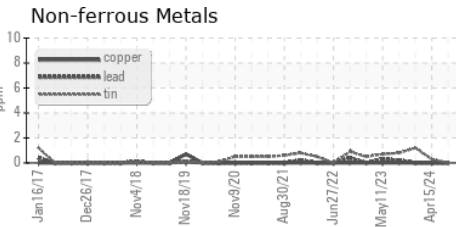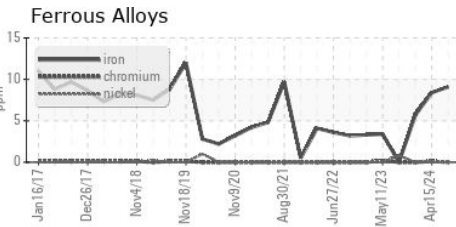

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USPM37652 **Received** : 10 Jun 2024
Lab Number : 06205470 **Tested** : 12 Jun 2024
Unique Number : 11072931 **Diagnosed** : 12 Jun 2024 - Doug Bogart
Test Package : IND 2

TYSON-DAKOTA CITY-PRO
 P.O. BOX 515
 DAKOTA CITY, NE
 US 68731
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)